







Minka-Aire® is a leader in ceiling fan innovation, blending cutting-edge design with exceptional performance. Founded with a vision to create high-quality, accessible ceiling fans, we've built our reputation by using premium materials, energy-efficient motors, and unmatched craftsmanship.

Our collection is designed for today's modern home, offering a variety of styles—from minimalist and contemporary to timeless and transitional. Each fan is engineered to complement any space while delivering optimal air circulation and performance.

With the rise of open-concept Great Rooms, we've reimaged our most popular designs with larger bodies and extended blade spans, ensuring comfort and style in these expansive spaces.

Outdoor living is a key focus, and our outdoor fans are built to withstand all weather conditions while adding sophistication to patios, porches, and other outdoor spaces.

Our smart fans feature advanced technology and energy-efficient motors to provide comfort while supporting a sustainable future.

Minka-Aire® ceiling fans offer a wide variety of options for the American home. Designed in California.

TABLE OF CONTENTS

NEWEST RELEASES

Bridge	24
Cairo	26
Falco Flush	28
Hourglass	30
Pierce 65"	32
Pierce 84"	34
Pike	36
Switch 3-Blades	38
Switch 5-Blades	40

INDOOR FANS

Airetor	44
Airetor III	46
Airewave	48
Aluma	50
Artemis™	52
Artemis™ IV	56
Artemis™ XL5	58
Audrey™	60
Aviation	62
Aviation LED	66
Barn	68
Bowie	70
Calais™	72
Classica	73
Clean	76
Concept™ I	78
Concept™ II 44"	80
Concept™ II 52"	82
Contractor LED	84
Contractor 42"	88
Contractor 52"	90
Contractor Plus	92
Contractor Uni-Pack	96
Cristafano™	100
Curl	102
Dream Star	104
Dyno	106
Dyno XL	110
Ellipse	114
Espace	116
Falco	118
Gordon™	120
Great Room Traditional	121
Gyro™	122
Kafé	124
Kafé XL	126
Kelvyn™	128
Kewl	130
Kola	132
Kola XL	134
Light Wave 44"	136
Light Wave 52"	138

Light Wave 65"	140
Lun-Aire	142
Mesa™ 42"	144
Mesa™ 52"	146
Minute	148
Mojo	150
Napoli™	152
Napoli™ II	153
New Era	154
Orb	156
Pinup	158
Pure	160
Raptor	162
Roto	164
Roto Flush	166
Roto LED	168
Rudolph	170
Sabot	174
Skyhawk	176
Skymaster	178
Slant	180
Sleek	182
Spacesaver	184
Steal	186
Stout	188
Supra® 32"	190
Supra® 44"	192
Supra® 52"	194
Supra® 52" LED	196
Swept	198
Symbio	200
Timber 68"	202
Timber 84"	204
Timeless	206
Traditional Gyro™	210
Transonic	212
Twist	214
Veer	216
Vintage Gyro™	218
Vital	220
Volterra™	222
Watt	224
Watt II	226
Wave 44"	228
Wave 52"	230
Wave 65"	232
Xtreme 72"	234
Xtreme 96"	236

INDOOR/OUTDOOR FANS

Aluma Wet	240
Anywhere	242
Avtur	244
Barn H2O	246
Chubby	248

Chubby II	250
Concept™ I Wet 52"	252
Concept™ I Wet 58"	254
Concept™ II Wet	256
Concept™ III	258
Concept™ IV	260
Deco	262
Future	264
Gauguin™	266
Groton	268
Gyro™ Wet	269
Java	270
Java LED	272
Java Xtreme	274
Molino	276
Rainman™	278
Roto XL	280
Rudolph Wet	282
Seacrest	284
Simple 44"	286
Simple 52"	290
Simple 65"	294
Simple Flush 52"	296
Simple Flush 60"	298
Skinie 44"	300
Skinie 56"	302
Slipstream	304
Strata	308
Sundance™ 42"	310
Sundance™ 52"	312
Sundowner®	314
Sunseeker	316
Traditional Concept™ 44"	318
Traditional Concept™ 52"	320
Vapor	322
Windmolen	324
Xtreme H2O 52"	326
Xtreme H2O 65"	328
Xtreme H2O 84"	330


SPECIFICATIONS & ACCESSORIES

Aire-Control® Systems	338
Airflow CFM	354
Bulb Reference	342
Custom LED Light Kits	335
Compatibility Chart	343
Fan Specifications	360
Finish Codes	372
Finishes	352
Glass Shades	336
Hanging Systems	348
Index	364
Universal Light Kits	334

ICON LEGEND



Your Minka-Aire® fan is Smart Ready out of the box. No need for additional hardware or hubs.



LED lighting is efficient, lasts up to 4 times longer than conventional lighting and uses less energy.



BOND - "Smart Together". Connect select Minka-Aire® ceiling fans over WiFi using the BOND Bridge device.



Indicates that product can be directly exposed to the elements. Rain, Snow or Sun.



AireControl® remotes control all functions: reverse, uplight (where applicable), fan light, speed control, as well as on/off.



Indicates that the product is suitable for high-humidity areas like bathrooms, kitchens, or covered patios, but not directly exposed to water, rain, or snow.




AireControl® wall control systems control all functions: reverse, uplight (where applicable), fan light, speed control, as well as on/off.



Indicates that the product is intended for indoor use only and should not be exposed to moisture or outdoor elements/conditions.



Best in class with energy efficient operation. Uses up to 70% less energy than traditional AC motors while producing more power.



Correlating color temperature lets you set the perfect mood, from bright, cool tones for reading to warm glows for a relaxing evening.



Minka-Aire® Smart Fan Collection

Fans with built in smart control

FEATURES

No Hub Required • No hardware to install

—

WiFi Enabled • Controls lights & fan speeds

—

Control as many fans as you need

—

Full control away from home

—

NEW - In app special features

HOW MINKA-AIRE® SMART FANS WORK


1. Install



2. Connect



3. Control

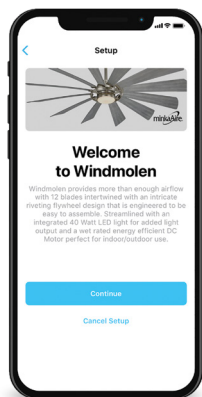

Easy to use
iOS & Android App



Google Home



Amazon Alexa



Nest



EcoBee



Look for the Smart Fan icon throughout the catalog for Minka-Aire® Smart fans.

ENERGY EFFICIENCY

Using the latest innovative technology and high quality materials, Minka-Aire® energy efficient DC motors provide the flexibility to create amazing fan styles and designs.



All Minka-Aire® DC motors are covered by our Limited Lifetime Warranty .

67%

DC motors are 67% more efficient than typical (AC Motor) ceiling fan motors

48W

Minka-Aire® DC motor fans use a maximum of 48 watts of electricity



DC Motors move a greater degree of fan blade pitches without adding significant energy consumption



Minka-Aire® DC motors offer 6 different fan speeds creating a more personalized comfort settings



BENEFITS OF LED LIGHTING

- **Long Life**

Longer lifetime is the number one benefit of LED lights. The diodes within our LEDs have an outstanding lifetime expectation of up to 30,000 hrs.

- **Energy Efficiency**

This is today's most efficient way of illumination and lighting, saving 80%-90% when compared to traditional lighting and conventional light bulbs.

- **Ecologically Friendly**

LED lights are free of toxic chemicals. Most conventional fluorescent lighting bulbs contain a multitude of materials like e.g. mercury that are dangerous for the environment.

- **Durable Quality**

LEDs are extremely durable and built with sturdy components that are highly rugged and can withstand the roughest conditions.

- **Zero UV Emissions**

LED illumination produces little infrared light and close to no UV emissions, which attracts less insects.

- **Dimmable**


All Minka-Aire® LED fans are dimmable as compared to CFLs which are not.

ROOM SIZE & CEILING HEIGHT GUIDELINES

ROOM SIZE


These measurements are for general air flow requirements only. Decorating plans or aesthetic considerations should influence your fan choices beyond these room size specifications. For very large rooms, multiple fans is an option.

Approximate Room Size	Blade Sweep
40-60 sq. ft.	26" - 42"
70-90 sq. ft.	44"
100-150 sq. ft.	52" - 54"
12' x 15' (Great Room) Over 160 sq. ft.	60" - 99"

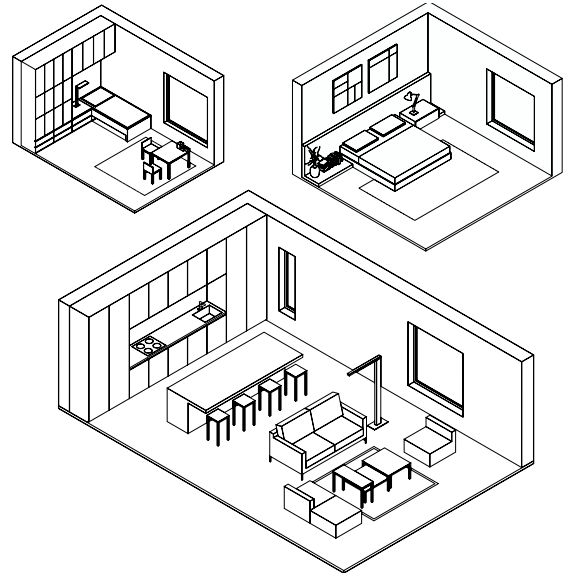

CEILING HEIGHT

Be sure there is at least 7 feet of clearance under your ceiling fan blades. The standard 6" downrod should work in most 8 foot ceiling installations. This will position the blades far enough from the ceiling to have enough "supply" air above the blades to provide good air movement. If greater floor to fan clearance is needed, some fans can use our low ceiling adapter (A180) without using any downrod. However, air movement is reduced using the low ceiling adapter.

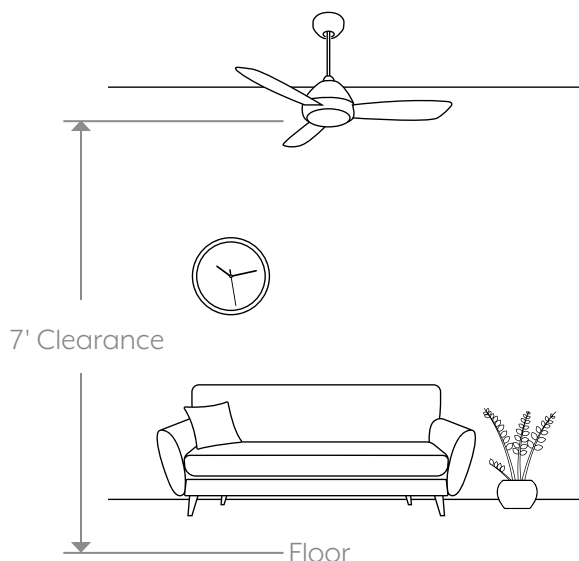

Ceiling Height	Downrod Length
9'	12"
10'	18"
12'	24"
14'	36"
16'	48"
18'	60"
20'	72"

This chart shows recommended downrod lengths for various ceiling heights.

NEWEST RELEASES



Bridge
Page 24



Cairo
Page 26



Falco Flush
Page 28



Hourglass
Page 30



Pierce 65"
Page 32



Pierce 84"
Page 34



Pike
Page 36



Switch 3-Blades
Page 38



Switch 5-Blades
Page 40

INDOOR FANS



Airetor
Page 44



Airetor III
Page 46



Airewave
Page 48

INDOOR FANS



Aluma
Page 50



Artemis™
Page 52



Artemis™ IV
Page 56



Artemis™ XL5
Page 58



Audrey™
Page 60



Aviation
Page 62



Aviation LED
Page 66



Barn
Page 68



Bowie
Page 70



Calais™
Page 72



Classica Gallery Edition
Page 73



Classica
Page 74

INDOOR FANS



Clean
Page 76



Concept™ I
Page 78



Concept™ II 44"
Page 80



Concept™ II 52"
Page 82



Contractor LED
Page 84



Contractor 42"
Page 88



Contractor 52"
Page 90



Contractor Plus
Page 92



Contractor Uni-Pack
Page 96



Cristafano™
Page 100



Curl
Page 102



Dream Star
Page 104

INDOOR FANS



Dyno
Page 106



Dyno XL
Page 110



Ellipse
Page 114



Espace
Page 116



Falco
Page 118



Gordon™
Page 120



Great Room Traditional
Page 121



Gyro™
Page 122



Kafé
Page 124



Kafé XL
Page 126



Kelvyn™
Page 128



Kewl
Page 130

INDOOR FANS



Kola
Page 132



Kola XL
Page 134



Light Wave 44"
Page 136



Light Wave 52"
Page 138



Light Wave 65"
Page 140



Lun-Aire
Page 142



Mesa™ 42"
Page 144



Mesa™ 52"
Page 146



Minute
Page 148



Mojo
Page 150



Napoli™
Page 152



Napoli™ II
Page 153

INDOOR FANS



New Era
Page 154



Orb
Page 156



Pinup
Page 158



Pure
Page 160



Raptor
Page 162



Roto
Page 164



Roto Flush
Page 166



Roto LED
Page 168



Rudolph
Page 170



Sabot
Page 174



Skyhawk
Page 176



Skymaster
Page 178

INDOOR FANS



Slant
Page 180



Sleek
Page 182



Spacesaver
Page 184



Steal
Page 186



Stout
Page 188



Supra® 32"
Page 190




Supra® 44"
Page 192



Supra® 52"
Page 194



Swept
Page 198

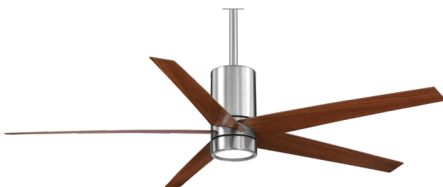

Symbio
Page 200



Timber 68"
Page 202



Timber 84"
Page 204

INDOOR FANS



Timeless
Page 206



Traditional Gyro™
Page 210



Transonic
Page 212



Twist
Page 214



Veer
Page 216



Vintage Gyro™
Page 218



Vital
Page 220




Volterra™
Page 222



Watt
Page 224



Watt II
Page 226



Wave 44"
Page 228



Wave 52"
Page 230

INDOOR FANS



Wave 65"
Page 232



Xtreme 72"
Page 234



Xtreme 96"
Page 236

INDOOR/OUTDOOR FANS



Aluma Wet
Page 240



Anywhere
Page 242



Avtur
Page 244



Barn H2O
Page 246



Chubby
Page 248



Chubby II
Page 250



Concept™ I Wet 52"
Page 252



Concept™ I Wet 58"
Page 254



Concept™ II Wet
Page 256

INDOOR/OUTDOOR FANS



Concept™ III
Page 258




Concept™ IV
Page 260



Deco
Page 262



Future
Page 264

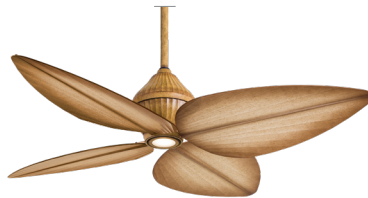

Gauguin™
Page 266



Groton
Page 268



Gyro™ Wet
Page 269



Java
Page 270



Java LED
Page 272



Java Xtreme
Page 274



Molino
Page 276



Rainman™
Page 278

INDOOR/OUTDOOR FANS



Roto XL
Page 280



Rudolph Wet
Page 282



Seacrest
Page 284



Simple 44"
Page 286



Simple 52"
Page 290



Simple 65"
Page 294



Simple Flush 52"
Page 296



Simple Flush 60"
Page 298



Skinnie 44"
Page 300



Skinnie 56"
Page 302



Slipstream
Page 304



Strata
Page 308

INDOOR/OUTDOOR FANS



Sundance™ 42"
Page 310



Sundance™ 52"
Page 312



Sundowner®
Page 314



Sunseeker
Page 316



Traditional Concept™ 44"
Page 318



Traditional Concept™ 52"
Page 320



Vapor
Page 322



Windmolen
Page 324



Xtreme H2O 52"
Page 326



Xtreme H2O 65"
Page 328



Xtreme H2O 84"
Page 330



A modern interior scene featuring a textured wall, a wooden panel, and a sofa with cushions. The wall has a mottled, earthy texture. A vertical wooden panel is on the right. A sofa with several cushions is in the foreground. The lighting is warm and ambient.

NEWEST RELEASES

Discover the 2025 Minka-Aire® ceiling fan collection, showcasing a thoughtfully curated selection of innovative designs that seamlessly complement today's diverse lifestyles. Experience outstanding design and exceptional craftsmanship with Minka-Aire®



F668L-DB/WTO

Dark Bronze Finish
White Oak Finished Blades
Etched Lens

BRIDGE

3-Blades, 60" Sweep • 15° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

DC 153 x 18mm Motor

High Speed 6,952 • Low Speed 2,383


20W LED

978 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

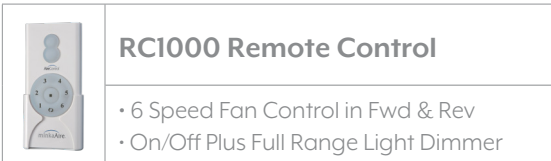

RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F668L-LBR/CL | Legacy Brass Finish • Coal Black Blades • Etched Lens



F668L-LBR/WHF | Legacy Brass Finish • Flat White Blades • Etched Lens





F897L-BNW/CL

Brushed Nickel Finish
Coal Black Blades
Matte Lens

CAIRO

6-Blades, 65" Sweep • 13° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - UL Listed for Wet Locations

DC 153 x 20mm Motor

High Speed 7,609 • Low Speed 3,315

24W LED

1,863 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)



RC1000 Remote Control


- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F897L-CL | Coal Black Finish • Coal Black Blades • Matte Lens



F897L-WHF | Flat White Finish • Flat White Blades • Matte Lens



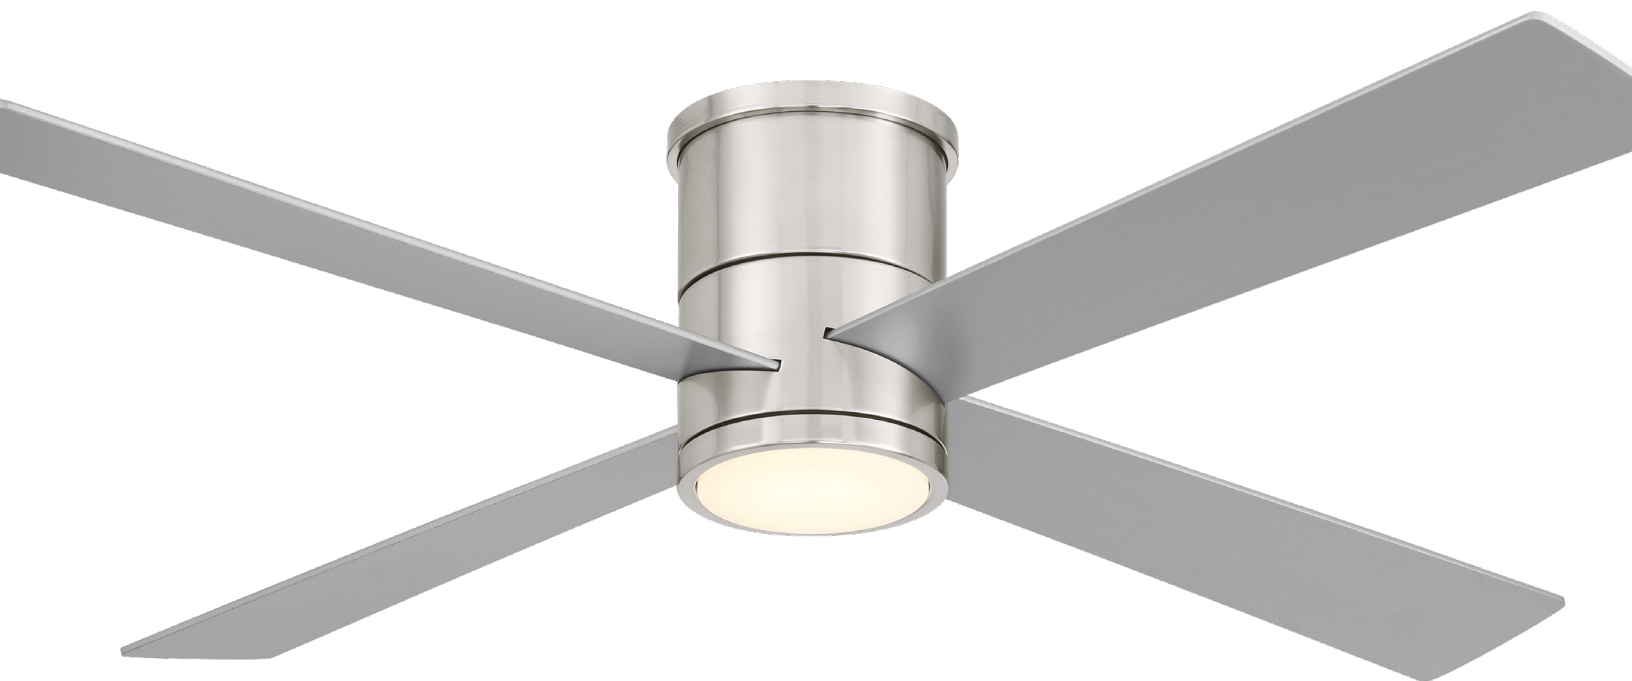

F797L-BN/SL

Brushed Nickel Finish

Silver Blades

Etched Lens

FALCO FLUSH

4-Blades, 54" Sweep • 12° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

AC 153 x 18mm Motor

High Speed 4,096 • Low Speed 1,893

20W LED

1,037 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Extension of the Original Non-Flush-Mount Falco Fan



F797L-CL | Coal Black Finish • Coal Black Blades • Etched Lens



F797L-CL/SBR | Coal Black & Soft Brass Finish • Coal Black Blades • Etched Lens



F797L-WHF | Flat White Finish • Flat White Blades • Etched Lens





F468L-LBR/WHF

Legacy Brass Finish

Flat White Blades

Etched Lens

HOURGLASS

3-Blades, 58" Sweep • 16° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

DC 108 x 20mm Motor

High Speed 4,744 • Low Speed 1,580

20W LED

958 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F468L-WHF | Flat White Finish • Flat White Blades • Etched Lens



F468L-CL | Coal Black Finish • Coal Black Blades • Etched Lens





F762L-BN/DK

Brushed Nickel Finish
Distressed Koa Blades
Etched Lens

PIERCE 65"

3-Blades, 65" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

DC 126 x 12mm Motor

High Speed 7,499 • Low Speed 2,573


20W LED

1,215 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

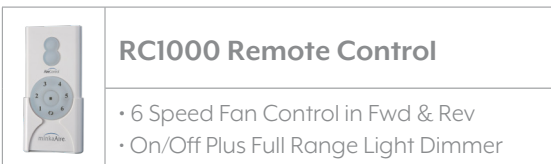

F762L-LBR/CL | Legacy Brass Finish • Coal Black Blades • Etched Lens



F762L-CL/SSB | Coal Black Finish • Shuo Sugi Ban Blades • Etched Lens



F762L-DB/WTO | Dark Bronze Finish • White Oak Finished Blades • Etched Lens





F763L-BN/DK

Brushed Nickel Finish
Distressed Koa Blades
Etched Lens

PIERCE 84"

3-Blades, 84" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

DC 126 x 20mm Motor

High Speed 8,106 • Low Speed 4,633

20W LED

1,215 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F763L-LBR/CL | Legacy Brass Finish • Coal Black Blades • Etched Lens



F763L-CL/SSB | Coal Black Finish • Shuo Sugi Ban Blades • Etched Lens



F763L-DB/WTO | Dark Bronze Finish • White Oak Finished Blades • Etched Lens





F774L-LBR/CL

Legacy Brass Finish
Coal Black Blades
Etched Lens

PIKE

3-Blades, 56" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

DC 145 x 18mm Motor

High Speed 5,499 • Low Speed 2,033

20W LED

1,603 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F774L-CL | Coal Black Finish • Coal Black Blades • Etched Lens



F774L-BN/SL | Brushed Nickel Finish • Silver Blades • Etched Lens



F774L-WHF | Flat White Finish • Flat White Blades • Etched Lens





F636L-BN/SL

Brushed Nickel Finish
Silver Blades
Etched Lens

SWITCH

3-Blades, 60” Sweep • 12° Blade Pitch • 10” Downrod • Dual Mount



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	DC 172 x 12mm Motor
CFM Range:	High Speed 6,686 • Low Speed 2,462
Light Source :	20W LED
Luminous Output:	1,639 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Wall Control System:	Hand Held Remote Control System (Included)
Special Features:	Convertible to Flush Mount



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F636L-BN/SL

Shown with Ceiling Adapter
for Flush Mount Applications.
(Included with all finishes)



F636L-CL | Coal Black Finish • Coal Black Blades • Etched Lens



F636L-WHF | Flat White Finish • Flat White Blades • Etched Lens





F638L-CL

Coal Black Finish
Coal Black Blades
Etched Lens

SWITCH

5-Blades, 60” Sweep • 12° Blade Pitch • 10” Downrod • Dual Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

DC 172 x 12mm Motor

High Speed 6,859 • Low Speed 2,956

20W LED

1,639 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Convertible to Flush Mount

	RC1000 Remote Control
	• 6 Speed Fan Control in Fwd & Rev • On/Off Plus Full Range Light Dimmer

F638L-CL

Shown with Ceiling Adapter
for Flush Mount Applications.
(Included with all finishes)



F638L-BN/SL | Brushed Nickel Finish • Silver Blades • Etched Lens



F638L-WHF | Flat White Finish • Flat White Blades • Etched Lens







INDOOR FANS

Step into the Minka-Aire® Indoor Fan collection, where exceptional design meets unmatched performance. This curated range features a variety of styles that effortlessly enhance any interior, offering both beauty and functionality for today's modern spaces.



F673L-CL

Coal Black Finish
Coal Black Blades
White Frosted Glass

AIRETOR

5-Blades, 52" Sweep • 12° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 153 x 17mm Motor
CFM Range:	High Speed 4,762 • Low Speed 1,946
Light Source :	16W LED
Luminous Output:	878 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	N/A

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,442	40	86
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F673L-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades • White Frosted Glass



F673L-BN/SL | Brushed Nickel Finish • Silver Blades • White Frosted Glass



F673L-WHF | Flat White Finish • Flat White Blades • White Frosted Glass





F670L-WHF
Flat White Finish
Flat White Blades
White Frosted Glass

AIRETOR III

3-Blades, 54" Sweep • 12° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 153 x 17mm Motor
CFM Range:	High Speed 4,495 • Low Speed 1,988
Light Source :	16W LED
Luminous Output:	829 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	N/A

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,320	41	82
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F670L-CL | Coal Black Finish • Coal Black Blades • White Frosted Glass



F670L-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades • White Frosted Glass



F670L-BN/SL | Brushed Nickel Finish • Silver Blades • White Frosted Glass





F839L-MBM

Matte Black Maple Finish
 Matte Black Maple Blades
 Etched Lens

*Matte Black Maple uses -CL downrods.
 Sterling Maple uses -WH downrods.*

AIREWAVE

3-Blades, 65” Sweep • 16° Blade Pitch • 10” Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations
 DC 120 x 25mm Motor
 High Speed 6,500 • Low Speed 3,200
 20W LED
 1,100 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
6,500	40	216
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F839L-DM | Dark Maple Finish • Dark Maple Blades • Etched Lens



F839L-SM | Sterling Maple Finish • Sterling Maple Blades • Etched Lens





F521L-ABD

Brushed Aluminum Finish
 Silver Blades
 Etched Opal Glass

ALUMA

4-Blades, 52" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations
 AC 153 x 15mm Motor
 High Speed 4,237 • Low Speed 1,400
 20W Dimmable LED
 905 Delivered Lumens
 3,000K
 CRI 90
 3-Wire Installation Wall Control (Included)
 Convertible to Electronic Control System

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,910	37	78
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



WC106L Wall Control

• 4 Speed Fan Control • Full Range Light Dimmer • 3 Wire Installation

F521L-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades • Tinted Opal Glass



F521L-WHF | Flat White Finish • Flat White Blades • Etched Opal Glass





F803DL-DK

Distressed Koa Finish
Tinted Opal Glass

ARTEMIS™

4-Vanes, 58” Sweep • Variable Blade Pitch • 6” Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations
DC 153 x 20mm Motor
High Speed 7,157 • Low Speed 2,295
20W Dimmable LED
809 Delivered Lumens
3,000K
CRI 90
Hand Held Remote Control System (Included)
Winner of the 2005 Chicago Athenaeum Good Design Award

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,878	26	186
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F803DL-MP | Maple Finish • Etched Opal Glass



*Shown with Cap
for Non-Light Use (Included)*

F803DL-TL | Translucent Finish • Etched Opal Glass



F803DL-WH | High Gloss White Finish • Etched Opal Glass





F803DL-CL

Coal Black Finish
Etched Opal Glass

ARTEMIS™

4-Vanes, 58” Sweep • Variable Blade Pitch • 6” Downrod



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	DC 153 x 20mm Motor
CFM Range:	High Speed 7,157 • Low Speed 2,295
Light Source :	20W Dimmable LED
Luminous Output:	809 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	Hand Held Remote Control System (Included)
Special Features:	Winner of the 2005 Chicago Athenaeum Good Design Award

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,878	26	186
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

	RC400 Remote Control
	• 6 Speed Fan Control in Fwd & Rev • On/Off Plus Full Range Light Dimmer

F803DL-SL | Silver Finish • Etched Opal Glass



F803DL-LN | Liquid Nickel Finish • Etched Opal Glass





F903L-SBR/WHF

Soft Brass Finish
 Flat White Blades
 Etched Lens

ARTEMIS™ IV

4-Blades, 64” Sweep • Variable Blade Pitch • 6” Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

DC MOTOR

BOND COMPATIBLE

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations
 DC 123 x 15mm Motor
 High Speed 8,129 • Low Speed 3,264
 20W LED
 659 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control System (Included)
 Cap for Non-Light Use (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
5,849	22	260
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F903L-GM/MBK | Gun Metal Finish • Matte Black Blades • Etched Lens



F903L-SBR/MBK | Soft Brass Finish • Matte Black Blades • Etched Lens



F903L-ORB | Oil Rubbed Bronze Finish • Toned Tobacco Blades • Etched Lens



F903L-BN/SL | Brushed Nickel Finish • Silver Blades • Etched Lens





F905L-LN

Liquid Nickel Finish
Etched Opal Glass

ARTEMIS™ XL5

5-Blades, 62" Sweep • Variable Blade Pitch • 6" Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

DC MOTOR

BOND COMPATIBLE

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

DC 172 x 25mm Motor

High Speed 6,076 • Low Speed 3,396

16W Dimmable LED

646 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Cap for Non-Light Use (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,820	26	182
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC600 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F905L-DK | Distressed Koa Finish • Tinted Opal Glass



F905L-WH | White Finish • Etched Opal Glass



*Shown with Cap
for Non-Light Use (Included)*



F631L-CL/DK

Coal Black and Distressed Koa Finish
Coal Black Blades

AUDREY™

3-Blades, 25" Diameter • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

AC 123 x 15mm Motor

High Speed 1,143 • Low Speed 731

4-8W Medium Base LED

800 Delivered Lumens

3,000K

CRI 80

Hand Held Remote Control System (Included)

Manual Reverse Switch for Winter and Summer Operation

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
1,143	33	34

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer





F853-BN/DK

Brushed Nickel Finish
Distressed Koa Blades

AVIATION

3-Blades, 60" Sweep • Variable Blade Pitch • 6" Downrod



DRY LOCATION



REMOTE CONTROLLED



DC MOTOR



BOND COMPATIBLE

Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	DC 120 x 25mm Motor
CFM Range:	High Speed 5,093 • Low Speed 2,127
Light Source :	N/A
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,703	20	187
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC500 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F853-BN/CL | Brushed Nickel Finish • Coal Black Blades



F853-BN/MM | Brushed Nickel Finish • Medium Maple Blades



F853-SBR/CL | Soft Brass Finish • Coal Black Blades





F853-BN/AMP

Brushed Nickel Finish
Ash Maple Blades

AVIATION

3-Blades, 60” Sweep • Variable Blade Pitch • 6” Downrod



DRY LOCATION



REMOTE CONTROLLED



DC MOTOR



BOND COMPATIBLE

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

DC 120 x 25mm Motor

High Speed 5,093 • Low Speed 2,127

N/A

N/A

N/A

N/A

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,703	20	187
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC500 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F853-BN/SL | Brushed Nickel Finish • Silver Blades



F853-WH | White Finish • White Blades





F853L-BN/AMP
 Brushed Nickel Finish
 Ash Maple Blades
 White Lens

AVIATION LED

3-Blades, 60" Sweep • Variable Blade Pitch • 6" Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

DC MOTOR

BOND COMPATIBLE

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

DC 120 x 25mm Motor

High Speed 5,093 • Low Speed 2,127

15W LED

912 Delivered Lumens

3,000K

CRI 80

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,703	20	187
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC500 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer



F853L-BN/DK | Brushed Nickel Finish • Distressed Koa Blades • White Lens





F864L-WHF/SVG
 Flat White Finish
 Savannah Grey Blades
 Clear Ribbed Glass

BARN

10-Blades, 65” Sweep • 16° Blade Pitch • 10” Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

DC MOTOR

SMART FAN

Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	DC 168 x 30mm Motor
CFM Range:	High Speed 9,155 • Low Speed 3,712
Light Source :	40W LED
Luminous Output:	1,984 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
6,603	33	203
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F864L-HBZ | Heirloom Bronze Finish • Barnwood Finish Blades • Clear Ribbed Glass



F864L-BNK | Burnished Nickel Finish • Savannah Grey Blades • Clear Ribbed Glass



F864L-CL/SG | Coal Black Finish • Seashore Grey Blades • Clear Ribbed Glass





F933-WHF

Flat White Finish
Flat White Blades

BOWIE

3-Blades, 52” Sweep • Variable Blade Pitch • 6” Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

DC MOTOR

BOND COMPATIBLE

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

DC 153 x 16mm Motor

High Speed 5,000 • Low Speed 2,000

20W LED Light Kit (Sold Separately)

N/A

N/A

N/A

Hand Held Remote Control System (Included)

Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,000	30	100
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer



F933-CL | Coal Black Finish • Coal Black Blades



*Shown with Optional
LED Light Kit (K9933L)*



F544L-BCW

Belcaro Walnut™ Finish
Dark Walnut Blades
Aged Champagne Glass

CALAIS™

5-Blades, 52" Sweep • 14° Blade Pitch • 12" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

AC 172 x 17mm Motor

High Speed 3,956 • Low Speed 1,345

5W Candelabra LED Bulbs (Included)

354 Delivered Lumens

2,700K

CRI 90

Remote Control System, Independent Up/Downlight (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,854	51	56

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer



F759L-PBL

Provençal Blanc Finish
Provençal Blanc Blades
Etched Glass

CLASSICA

GALLERY EDITION

5-Blades, 54" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

AC 172 x 16mm Motor

High Speed 4,878 • Low Speed 1,892

4W Candelabra LED Bulbs (Included)

831 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,279	46	76

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.

	RCS213 Remote Control
	• 3 Speed Fan Control • On/Off Plus Full Range Light Dimmer



F659-DRF

Driftwood Finish
Driftwood Blades

CLASSICA

5-Blades, 54" Sweep • 14° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 172 x 14mm Motor
CFM Range:	High Speed 4,037 • Low Speed 2,226
Light Source :	Universal Light Kit Available (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	N/A

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,394	41	83
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F659-PBL | Provencal Blanc Finish • Provencal Blanc Blades



F659-FB | French Beige Finish • Medium Maple Blades





F684L-MBK/BN
Matte Black with
Brushed Nickel Finish
Urban Walnut Blades
Etched Lens

CLEAN

5-Blades, 60" Sweep • 12° Blade Pitch • 6" Downrod


DRY LOCATION


REMOTE CONTROLLED


LED


DC MOTOR


BOND COMPATIBLE

Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	DC 123 x 30mm Motor
CFM Range:	High Speed 10,340 • Low Speed 4,039
Light Source :	10W LED
Luminous Output:	408 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	Hand Held Remote Control System (Included)
Special Features:	Cap for Non-Light Use (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
10,340	40	258.5
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F684L-GI/BN | Grey Iron/Brushed Nickel Finish • Grey Iron Finish Blades • Etched Lens



F684L-ORB/TB | Oil Rubbed Bronze/Toned Bronze Finish • Urban Walnut Blades • Etched Lens



F684L-PN | Polished Nickel Finish • Silver Blades • Etched Lens



*Shown with Cap
for Non-Light Use (Included)*



F517L-BN

Brushed Nickel Finish
Silver Blades
White Opal Glass
*Shown with Cap
for Non-Light Use (Included)*

CONCEPT™ I

3-Blades, 52" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

AC 123 x 15mm Motor

High Speed 5,204 • Low Speed 2,133

14W LED

540 Delivered Lumens

3,000K

CRI 80

Hand Held Remote Control System (Included)

Optional Blade Finishes

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,764	40	93

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RCS212 Remote Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F517L-WH | White Finish • White Blades • Etched White Glass





F518L-ORB

Oil Rubbed Bronze Finish

Taupe Blades

White Opal Glass

CONCEPT™ II 44"

3-Blades, 44" Sweep • 14° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

AC 153 x 15mm Motor

High Speed 3,656 • Low Speed 1,465

14W LED

537 Delivered Lumens

3,000K

CRI 80

Full Function Hand Held Remote Control System (Included)

Optional Blade Finishes

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,629	29	92

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RCS212 Remote Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F518L-BN | Brushed Nickel Finish • Silver Blades • White Opal Glass



F518L-WH | White Finish • White Blades • White Opal Glass





F519L-BN

Brushed Nickel Finish
 Silver Blades
 White Opal Glass

CONCEPT™ II 52"

3-Blades, 52" Sweep • 14° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations
 AC 172 x 20mm Motor
 High Speed 5,423 • Low Speed 1,874
 14W LED
 537 Delivered Lumens
 3,000K
 CRI 80
 Full Function Hand Held Remote Control System (Included)
 Optional Blade Finishes

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,759	41	92
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS212 Remote Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F519L-ORB | Oil Rubbed Bronze Finish • Taupe Blades • White Opal Glass



F519L-WH | White Finish • White Blades • White Opal Glass





F556L-CL

Coal Black Finish
 Coal Black Blades
 Etched Lens

CONTRACTOR LED

5-Blades, 52" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

AC 153 x 15mm Motor

High Speed 5,314 • Low Speed 1,756

16W LED

1,290 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control (Included)

Replacement LED Assembly (Part #6F844LK01)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,646	41	89
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer


F556L-ORB | Oil Rubbed Bronze Finish • Reversible Medium Maple/Dark Walnut Blades • Etched Lens



F556L-BN | Brushed Nickel Finish • Silver Blades • Etched Lens



F556L-WHF | Flat White Finish • Flat White Blades • Etched Lens

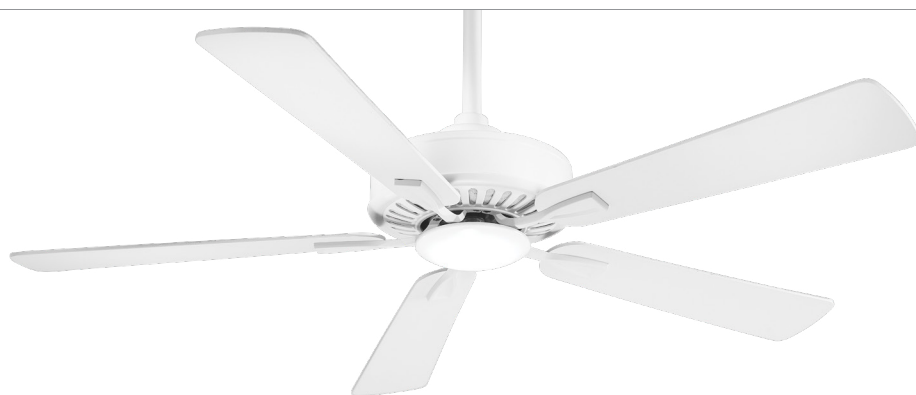

F556L-WH | White Finish • White Blades • Etched Lens





F556L-BN/DW
Brushed Nickel Finish
Reversible Medium Maple/
Dark Walnut Blades
Etched Lens

CONTRACTOR LED

5-Blades, 52" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

AC 153 x 15mm Motor

High Speed 5,314 • Low Speed 1,756

16W LED

1,290 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control (Included)

Replacement LED Assembly (Part #6F844LK01)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,646	41	89
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F556L-HBZ | Heirloom Bronze Finish • Barnwood Blades • Etched Lens



F556L-BNK | Burnished Nickel Finish • Savannah Grey Blades • Etched Lens





F546-BS

Brushed Steel Finish
Silver Blades

CONTRACTOR 42"

5-Blades, 42" Sweep • 12° Blade Pitch • 4" Downrod • 3-Speed Pull Chain



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - UL Listed for Dry Locations
AC 153 x 10mm Motor
High Speed 3,290 • Low Speed 1,558
Universal Light Kit Adaptable (Sold Separately)
N/A
N/A
N/A
N/A
Pre-Installed One-Piece Motor/Blade Iron Gasket

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,067	31	67

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.

F546-WH | White Finish • White Blades





F547-BS/DW

Brushed Steel Finish
Dark Walnut Blades

CONTRACTOR 52"

5-Blades, 42" Sweep • 12° Blade Pitch • 4" Downrod • 3-Speed Pull Chain



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - UL Listed for Dry Locations
AC 153 x 13mm Motor
High Speed 4,565 • Low Speed 1,545
Universal Light Kit Adaptable (Sold Separately)
N/A
N/A
N/A
N/A
Optional Blade Finishes

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,968	39	77

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.

F547-BS | Brushed Steel Finish • Silver Blades



F547-WH | White Finish • White Blades





F556-BN
Brushed Nickel Finish
Silver Blades

CONTRACTOR PLUS

5-Blades, 52" Sweep • 12° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 153 x 15mm Motor
CFM Range:	High Speed 5,966 • Low Speed 2,277
Light Source :	Universal Light Kit Adaptable (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	N/A

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,646	41	89
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F556-BNK | Burnished Nickel Finish • Savannah Grey Blades



F556-BN/DW | Brushed Nickel Finish • Reversible Medium Maple/Dark Walnut Blades



*Shown with Medium Maple Blades
Reversible to Dark Walnut Blades*

F556-CL | Coal Black Finish • Coal Black Blades



F556-WHF | Flat White Finish • Flat White Finish





F448L-BS/DW
Brushed Steel Finish
Dark Walnut Blades
Frosted White Glass

CONTRACTOR UNI-PACK

5-Blades, 52" Sweep • 12° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - UL Listed for Dry Locations
Motor Type:	AC 153 x 13mm Motor
CFM Range:	High Speed 5,089 • Low Speed 1,435
Light Source :	9W LED
Luminous Output:	1,264 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	N/A
Special Features:	Cap for Non-Light Use (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,007	37	81

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.

F448L-BS | Brushed Steel Finish • Silver Blades • Frosted White Glass



F448L-CL | Coal Black Finish • Coal Black Blades • Frosted White Glass



F448L-ORB | Oil Rubbed Bronze Finish • Medium Maple Blades • Frosted White Glass



F448L-WH | White Finish • White Blades • Frosted White Glass





F656L-CL

Coal Black Finish
Coal Black Blades
Frosted White Glass

CONTRACTOR UNI-PACK

5-Blades, 52” Sweep • 12° Blade Pitch • 6” Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 172 x 14mm Motor
CFM Range:	High Speed 5,089 • Low Speed 1,435
Light Source :	26W LED
Luminous Output:	1,531 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	N/A

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,392	43	80
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day - Your cost depends on rates and use - The higher the airflow, the more air the fan will move.		

F656L-ORB | Oil Rubbed Bronze Finish • Medium Maple/Dark Walnut Blades • Frosted White Glass



F656L-PN | Polished Nickel Finish • Silver Blades • Frosted White Glass



F656L-WH | White Finish • White Blades • Frosted White Glass





F656L-BN/DW
Brushed Nickel Finish
Reversible Medium Maple/
Dark Walnut Blades
Frosted White Glass

CONTRACTOR UNI-PACK

5-Blades, 52" Sweep • 12° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 172 x 14mm Motor
CFM Range:	High Speed 5,089 • Low Speed 1,435
Light Source :	26W LED
Luminous Output:	1,531 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	N/A

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,392	43	80
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day - Your cost depends on rates and use - The higher the airflow, the more air the fan will move.		

F656L-HBZ | Heirloom Bronze Finish • Barnwood Blades • Frosted White Glass



F656L-BNK | Burnished Nickel Finish • Savannah Grey Blades • Frosted White Glass





F900L-BCW

Belcaro Walnut™ Finish
 Dark Walnut Blades
 Etched Cut Glass

CRISTAFANO™

5-Blades, 68" Sweep • 14° Blade Pitch • 16" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source - Uplight:

Light Source - Downlight:

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations
 AC 212 x 25mm Motor
 High Speed 7,644 • Low Speed 2,897
 4W Candelabra LED Bulbs (Included)
 4W Mini-Can LED Bulbs (Included)
 1,043 Delivered Lumens
 3,000K
 CRI 80
 Full Function Wall Control System (Included)
 Precision-Cut and Polished, Lead-Free Spectra® Crystal

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
5,438	63	86
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

	WCS212 Wall Control
	• 3 Speed Fan Control in Fwd & Rev • On/Off Plus Full Range Light Dimmer





F714L-BN/CL

Brushed Nickel Finish
Coal Black Blades
Etched Lens

CURL

3-Blades, 60" Sweep • Variable Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

DC 123 x 30mm Motor

High Speed 7,411 • Low Speed 1,487

20W LED

1,329 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,447	28	169

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F714L-BN/SL | Brushed Nickel Finish • Silver Blades • Etched Lens



F714L-WHF | Flat White Finish • Flat White Blades • Etched Lens





F788L-ORB

Oil Rubbed Bronze Finish
 Oil Rubbed Bronze Blades
 Etched Opal Lens

DREAM STAR

8-Blades, 60” Sweep • Variable Blade Pitch • 12” Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

DC MOTOR

BOND COMPATIBLE

Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	DC 168 x 30mm Motor
CFM Range:	High Speed 5,666 • Low Speed 1,723
Light Source :	18W LED
Luminous Output:	683 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,818	21	179
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer





F1000-CL
 Coal Black Finish
 Seashore Grey Blades
 Etched Lens

DYNO

5-Blades, 52” Sweep • 12° Blade Pitch • 6” Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

BOND COMPATIBLE

Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 153 x 17mm Motor
CFM Range:	High Speed 4,509 • Low Speed 1,520
Light Source :	20W Dimmable LED
Luminous Output:	1,235 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,108	40	77
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F1000-BN/SL | Brushed Nickel Finish • Reversible Silver/Aged Wood Blades • Etched Lens



*Shown with Aged Wood Blades
Reversible to Silver Blades*

F1000-ORB | Oil Rubbed Bronze Finish • Reversible Medium Maple/Dark Walnut Blades • Etched Lens



*Shown with Medium Maple Blades
Reversible to Dark Walnut Blades*

F1000-WH | White Finish • White Blades • Etched Lens





F1000-HBZ
 Heirloom Bronze Finish
 Barnwood Finish Blades
 Etched Lens

DYNO

5-Blades, 52" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 153 x 17mm Motor
CFM Range:	High Speed 4,509 • Low Speed 1,520
Light Source :	20W Dimmable LED
Luminous Output:	1,235 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,108	40	77
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F1000-BNK | Burnished Nickel Finish • Savannah Grey Blades • Etched Lens



F1000-BN | Brushed Nickel Finish • Reversible Medium Maple/Dark Walnut Blades • Etched Lens



*Shown with Dark Walnut Blades
Reversible to Medium Maple Blades*



F1001-CL

Coal Black Finish
Seashore Grey Blades
Etched Lens

DYNO XL

5-Blades, 60" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

DC 172 x 12mm Motor

High Speed 5,987 • Low Speed 1,807

26W LED

2,051 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,028	22	183
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC600 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F1001-ORB | Oil Rubbed Bronze Finish • Reversible Medium Maple/Dark Walnut Blades • Etched Lens



*Shown with Medium Maple Blades
Reversible to Dark Walnut Blades*

F1001-BN | Brushed Nickel Finish • Reversible Medium Maple/Dark Walnut Blades • Etched Lens



*Shown with Dark Walnut Blades
Reversible to Medium Maple Blades*

F1001-WH | White Finish • White Blades • Etched Lens





F1001-BNK

Burnished Nickel Finish
Savannah Grey Blades
Etched Lens

DYNO XL

5-Blades, 60" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

DC 172 x 12mm Motor

High Speed 5,987 • Low Speed 1,807

26W LED

2,051 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,028	22	183
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC600 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer



F1001-HBZ | Heirloom Bronze Finish • Barnwood Finish Blades • Etched Lens





F771L-BN/SL
 Brushed Nickel Finish
 Silver Blades
 Etched Lens

ELLIPSE

5-Blades, 60” Sweep • 16° Blade Pitch • 10” Downrod



Location Rating:
Motor Type:
CFM Range:
Light Source :
Luminous Output:
Color Temperature:
Color Rendering Index:
Remote Control System:
Special Features:

Indoor Use - ETL Listed for Dry Locations
DC 120 x 20mm Motor
High Speed 5,854 • Low Speed 3,165
20W LED
1,698 Delivered Lumens
3,000K
CRI 90
Hand Held Remote Control System (Included)
Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,593	22	210
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F771L-BN/WH | Brushed Nickel Finish • White Blades • Etched Lens





F690L-BN/SL
Brushed Nickel Finish
Silver Blades
Etched Opal Glass

ESPACE

5-Blades, 52" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

AC 172 x 17mm Motor

High Speed 5,075 • Low Speed 1,744

18W Dimmable LED

618 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,514	45	78
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F690L-CL | Coal Black Finish • Coal Black Blades • Etched Opal Glass



F690L-ORB/MM | Oil Rubbed Bronze Finish • Medium Maple Blades • Etched Opal Glass



F690L-WH | White Finish • White Blades • Etched Opal Glass





F796L-CL/SBR

Coal Black & Soft Brass Finish
 Coal Black Blades
 Acrylic Shade

FALCO

4-Blades, 54" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations
 AC 153 x 18mm Motor
 High Speed 5,000 • Low Speed 3,000
 20W LED
 1,205 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,200	48	66
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F796L-CL | Coal Black Finish • Coal Black Blades • Acrylic Shade



F796L-BN/SL | Brushed Nickel Finish • Silver Blades • Acrylic Shade



F796L-WHF | Flat White Finish • Flat White Blades • Acrylic Shade





F633L-CL

Coal Black Finish
Coal Black Blades
Etched Opal Lens

GORDON™

3-Blades, 29" Diameter • 26° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

AC 123 x 15mm Motor

High Speed 1,143 • Low Speed 1,057

19W LED

950 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Manual Reverse Switch for Winter and Summer Operation

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
1,263	22	57

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer



F539-ORB

Oil Rubbed Bronze Finish
Dark Walnut Blades

GREAT ROOM TRADITIONAL

5-Blades, 72" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Indoor Use - ETL Listed for Dry Locations
AC 212 x 25mm Motor
High Speed 10,659 • Low Speed 3,723
Universal Light Kit – K9376-2 (Sold Separately)
N/A
N/A
N/A
Full Function Wall Control (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
7,191	65	111

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.

	WCS212 Wall Control
	• 3 Speed Fan Control in Fwd & Rev • On/Off Plus Full Range Light Dimmer



F602L-RRB
 Restoration Bronze™ Finish
 Restoration Bronze™ Blades
 Etched Opal School House Globe Glass

GYRO™

Twin Turbo Fans, 42" Sweep • 20° Blade Pitch • 6" Downrod



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 82 x 25mm Motor
CFM Range:	High Speed 4,709 • Low Speed 3,335
RPM Range:	High Speed 1,310 • Low Speed 930
Light Source :	4W Mini-Can LED Bulb
Luminous Output:	N/A
Color Temperature:	3,000K
Color Rendering Index:	N/A
Wall Control System:	Wall Control with Independent Fan Speeds & Rotation
Special Features:	Complete Assembly Rotates 360° at 2 RPM

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,075	69	59
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

	WCS212 Wall Control
	• 3 Speed Fan Control in Fwd & Rev • On/Off Plus Full Range Light Dimmer

F602L-BN/CH | Brushed Nickel Chrome Finish • Rosewood Blades • Etched Opal Glass





F695-BNK

Burnished Nickel Finish
Seashore Grey Blades

KAFÉ

5-Blades, 52” Sweep • 12° Blade Pitch • 6” Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 172 x 14mm Motor
CFM Range:	High Speed 4,766 • Low Speed 1,213
Light Source :	Universal Light Kit Available (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	N/A

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,131	41	76
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F695-CL | Coal Black Finish • Coal Black Blades



F695-WH | White Finish • White Blades



F695-HBZ | Heirloom Bronze Finish • Aged Boardwalk Blades



F695-KA | Kocoa Finish • Reversible Toned Medium Maple/Dark Maple Blades



*Shown with Toned Medium Maple Blades
Reversible to Dark Maple Blades*



F696-BNK
Burnished Nickel Finish
Seashore Grey Blades

KAFÉ XL

5-Blades, 60" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 172 x 14mm Motor
CFM Range:	High Speed 6,305 • Low Speed 1,457
Light Source :	Universal Light Kit Available (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	Full Function Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,033	50	80
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS212 Remote Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F696-CL | Coal Black Finish • Coal Black Blades



F696-WH | White Finish • White Blades



F696-HBZ | Heirloom Bronze Finish • Aged Boardwalk Blades



F696-KA | Kocoa Finish • Reversible Toned Medium Maple/Dark Maple Blades



*Shown with Toned Medium Maple Blades
Reversible to Dark Maple Blades*



F717L-BN/SL
 Brushed Nickel Finish
 Silver Blades
 Etched Lens

KELVYN™
 5-Blades, 52" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 153 x 17mm Motor
CFM Range:	High Speed 4,603 • Low Speed 1,733
Light Source :	14W LED Variable CCT
Luminous Output:	1,082 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 80
Remote Control System:	Hand Held Remote Control System (Included)
Special Features:	Adjustable CCT LED Lighting

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,258	45	73
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F717L-WHF | Flat White Finish • Flat White Blades • Etched Lens



F717L-CL | Coal Black Finish • Coal Black Blades • Etched Lens





F833-WH

White Finish
White Blades

KEWL

3-Blades, 52" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations
AC 188 x 15mm Motor
High Speed 4,981 • Low Speed 1,499
N/A
N/A
N/A
N/A
2-Wire Installation Wall Control System (Included)
Convertible to Electronic Control System

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,349	31	107
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

	WC105-WH Wall Control
	• 4 Speed Fan Control • 2-Wire Installation

F833-BK | Black Finish • Black Blades



F833-SL | Silver Finish • Silver Blades





F688-KA

Kocoa Finish
Reversible Toned Medium
Maple/Dark Maple Blades
Shown with Dark Maple Blades

KOLA

5-Blades, 52” Sweep • 12° Blade Pitch • 6” Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 172 x 14mm Motor
CFM Range:	High Speed 4,901 • Low Speed 1,401
Light Source :	Universal Light Kit Available (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	N/A

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,314	43	77
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F688-WH | White Finish • White Blades





F689-KA

Kocoa Finish
 Reversible Toned Medium
 Maple/Dark Maple Blades
Shown with Dark Maple Blades

KOLA XL

5-Blades, 60" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations
 AC 188 x 20mm Motor
 High Speed 6,497 • Low Speed 1,608
 Universal Light Kit Available (Sold Separately)
 N/A
 N/A
 N/A
 Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,206	51	83
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS212 Remote Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F689-DBB | Dark Brushed Bronze Finish • Reversible Dark Maple/Dark Walnut Blades



*Shown with Dark Walnut Blades
Reversible to Dark Maple Blades*

F689-WH | White Finish • White Blades





F845-DK

Distressed Koa Finish
 Distressed Koa Blades
 Etched Lens

LIGHT WAVE 44"

3-Blades, 44" Sweep • Variable Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations
 AC 123 x 15mm Motor
 High Speed 3,673 • Low Speed 1,599
 16W LED
 1,209 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,705	41	65
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F845-CL | Coal Black Finish • Coal Black Blades • Etched Lens



F845-DRF | Driftwood Finish • Driftwood Blades • Etched Lens



F845-SL | Silver Finish • Silver Blades • Etched Lens



F845-WH | White Finish • White Blades • Etched Lens





F844-DRF

Driftwood Finish
 Driftwood Blades
 Etched Lens

LIGHT WAVE 52"

3-Blades, 52" Sweep • Variable Blade Pitch • 6" Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

BOND COMPATIBLE

Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 172 x 14mm Motor
CFM Range:	High Speed 4,453 • Low Speed 1,497
Light Source :	16W Dimmable LED
Luminous Output:	1,209 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,447	21	214
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F844-CL | Coal Black Finish • Coal Black Blades • Etched Lens



F844-DK | Distressed Koa Finish • Distressed Koa Blades • Etched Lens



F844-SL | Silver Finish • Silver Blades • Etched Lens



F844-WH | White Finish • White Blades • Etched Lens





F848-DK

Distressed Koa Finish
 Distressed Koa Blades
 Etched Lens

LIGHT WAVE 65”

3-Blades, 65” Sweep • Variable Blade Pitch • 6” Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

BOND COMPATIBLE

Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 123 x 15mm Motor
CFM Range:	High Speed 5,718 • Low Speed 1,1280
Light Source :	26W LED
Luminous Output:	1,883 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,638	53	69
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F848-CL | Coal Black Finish • Coal Black Blades • Etched Lens



F848-DRF | Driftwood Finish • Driftwood Blades • Etched Lens



F848-SL | Silver Finish • Silver Blades • Etched Lens



F848-WH | White Finish • White Blades • Etched Lens





F534L-CL/SG
Coal Black Finish
Seashore Grey Blades
Etched Opal Glass

LUN-AIRE

5-Blades, 54" Sweep • 12° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 172 x 17mm Motor
CFM Range:	High Speed 5,198 • Low Speed 2,176
Light Source :	16W LED
Luminous Output:	440 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	N/A

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,781	41	92
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day - Your cost depends on rates and use - The higher the airflow, the more air the fan will move.		

F534L-CL | Coal Black Finish • Coal Black Blades • Etched Opal Glass



F534L-BN | Brushed Nickel Finish • Silver Blades • Etched Opal Glass



F534L-WH | White Finish • White Blades • Etched Opal Glass



F534L-ORB | Oil Rubbed Bronze Finish • Dark Pine Blades • Etched Opal Glass





F566-WH

White Finish

White Blades

MESA™ 42"

5-Blades, 42" Sweep • 12° Blade Pitch • Flush Mount • 3-Speed Pull Chain



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - UL Listed for Dry Locations

AC 153 x 10mm Motor

High Speed 3,291 • Low Speed 1,274

N/A

N/A

N/A

N/A

N/A

Quick Connect Detachable Switch Cup

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,106	31	69

All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day •
Your cost depends on rates and use • The higher the airflow, the more air the fan will move.





F565-WH

White Finish
White Blades

MESA™ 52"

5-Blades, 52" Sweep • 12° Blade Pitch • Flush Mount • 3-Speed Pull Chain



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - UL Listed for Dry Locations
AC 153 x 14mm Motor
High Speed 3,733 • Low Speed 1,230
Universal Light Kit Adaptable (Sold Separately)
N/A
N/A
N/A
N/A
Quick Connect Detachable Switch Cup

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,558	38	67

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day •
Your cost depends on rates and use • The higher the airflow, the more air the fan will move.

F565-BN | Brushed Nickel Finish • Silver Blades





F553L-BN/DW
 Brushed Nickel Finish
 Reversible Medium Maple/
 Dark Walnut Blades
 Etched White Glass

MINUTE

5-Blades, 52" Sweep • 12° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	DC 145 x 18mm Motor
CFM Range:	High Speed 5,029 • Low Speed 1,746
Light Source :	26W LED
Luminous Output:	1,763 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Wall Control System:	Wall Control Optional (WDCI200)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,490	21	167

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.

F553L-CL | Coal Black Finish • Coal Black Blades • Etched White Glass



F553L-ORB | Oil Rubbed Bronze Finish • Reversible Medium Maple/Dark Walnut Blades • Etched White Glass



F553L-WHF | Flat White Finish • Flat White Blades • Etched White Glass





F522L-CL

Coal Black Finish
Coal Black Blades
Frosted White Glass

MOJO

5-Blades, 52” Sweep • 12° Blade Pitch • 6” Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 153 x 15mm Motor
CFM Range:	High Speed 4,168 • Low Speed 2,055
Light Source :	4W Candelabra LED Bulbs (Included)
Luminous Output:	714 Delivered Lumens
Color Temperature:	2,700K
Color Rendering Index:	CRI 90
Remote Control System:	Solid Cap & Finial Adaptation for Remote Control Use (Included)
Special Features:	Cap for Non-Light Use (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,178	42	75
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F522L-ORB | Oil Rubbed Bronze Finish • Reversible Medium Maple/Dark Walnut Blades • Frosted White Glass



*Shown with Medium Maple Blades
Reversible to Dark Walnut Blades*

F522L-WH | Flat White Finish • White Blades • Frosted White Glass



F522L-BN | Brushed Nickel Finish • Reversible Medium Maple/Dark Walnut Blades • Frosted White Glass



*Shown with Medium Maple Blades
Reversible to Dark Walnut Blades*



F705L-STW

Sterling Walnut™ Finish
Sterling Walnut™ Shaded Blades
Aged Champagne Glass

NAPOLI™

5-Blades, 56" Sweep • 14° Blade Pitch • 12" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Indoor Use - ETL Listed for Dry Locations

AC 188 x 25mm Motor

High Speed 7,608 • Low Speed 2,895

20W Dimmable LED

516 Delivered Lumens

3,000K

CRI 90

Full function Wall Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
5,398	67	81

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



WCS212 Wall Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer



F715DL-STW

Sterling Walnut™ Finish
Sterling Walnut™ Shaded Blades
Aged Champagne Glass

NAPOLI™ II

5-Blades, 68" Sweep • 14° Blade Pitch • 12" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

DC 120 x 25mm Motor

High Speed 6,839 • Low Speed 2,881

20W Dimmable LED

695 Delivered Lumens

2,700K

CRI 90

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
5,145	20	261

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RC500 Wall Control

- 6 Speed Fan Control in Fwd and Rev
- On/Off Plus Full Range Light Dimmer



F513-WH

White Finish
White Blades

NEW ERA

4-Blades, 52” Sweep • 14° Blade Pitch • 6” Downrod



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 172 x 16mm Motor
CFM Range:	High Speed 4,801 • Low Speed 1,754
Light Source :	N/A
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	Full Function Hand Held Remote Control System (Included)
Special Features:	Universal Light Kits Available

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,373	45	75
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS212 Remote Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F513-KA | Kocoa Finish • Reversible Toned Medium Maple/Dark Maple Blades



*Shown with Toned Medium Maple Blades
Reversible to Dark Maple Blades*



F623L-WHF/SBR

Flat White/ Soft Brass Finish
 Flat White Blades
 Etched Opal Glass

ORB

4-Blades, 54” Sweep • 12° Blade Pitch • 6” Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

BOND COMPATIBLE

Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 153 x 17mm Motor
CFM Range:	High Speed 4,985 • Low Speed 2,257
Light Source :	16W LED
Luminous Output:	661 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,707	40	93
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F623L-BC/SBR | Brushed Carbon/Soft Brass Finish • Brushed Carbon Blades • Etched Opal Glass



F623L-BBR/SBR | Brushed Brass/ Soft Brass Finish • Brushed Carbon Blades • Etched Opal Glass



*Compatible with
Downrods in Finish CSBR*

F623L-BS/BN | Brushed Steel/Brushed Nickel Finish • Silver Blades • Etched Opal Glass



F623L-WHF/BN | Flat White/Brushed Nickel Finish • Flat White Blades • Etched Opal Glass





F862L-CL

Coal Black Finish
 Coal Black Blades
 Etched Lens

PINUP

5-Blades 60” Sweep | 5-Blades 41” Sweep • 23° Blade Pitch • 6” Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

DC MOTOR

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations
 DC 172 x 12mm Motor
 High Speed 6,573 • Low Speed 2,628
 20W LED
 1,800 Delivered Lumens
 3,000K
 CRI 80
 Hand Held Remote Control System (Included)
 Counter Rotating Blades

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,724	26	185
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F862L-WHF | Flat White Finish • Flat White Blades • Etched Lens





F671L-BN/SL

Brushed Nickel Finish
 Silver Blades
 Etched White Lens

PURE

3-Blades, 48” Sweep • 12° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations
 AC 153 x 17mm Motor
 High Speed 3,891 • Low Speed 1,577
 16W LED
 825 Delivered Lumens
 3,000K
 CRI 90
 3-Wire Installation Wall Control (Included)
 Converts to Electronic Control

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,807	28	101
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



WC116L Wall Control

- 4 Speed Fan Control
- Full Range Light Dimmer

F671L-CL | Coal Black Finish • Coal Black Blades • Etched White Lens



F671L-WHF | Flat White Finish • Flat White Blades • Etched White Lens





F617L-WHF

Flat White Finish
 Flat White Blades
 Etched Opal Glass

RAPTOR

5-Blades, 60” Sweep • 12° Blade Pitch • 6” Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

DC MOTOR

BOND COMPATIBLE

Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	DC 172 x 12mm Motor
CFM Range:	High Speed 6,959 • Low Speed 2,088
Light Source :	16W LED
Luminous Output:	574 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,674	21	222
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC600 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F617L-BN | Brushed Nickel Finish • Silver Blades • Etched Opal Glass



F617L-GM | Gun Metal Finish • Gun Metal Finish Blades • Etched Opal Glass



F617L-ORB/AB | Oil Rubbed Bronze/Antique Brass Finish • Toned Tobacco Blades • Tinted Opal Glass





F524-WHF

Flat White Finish
Flat White Blades

ROTO

3-Blades, 52" Sweep • 22° Blade Pitch • 6" Downrod



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 153 x 15mm Motor
CFM Range:	High Speed 4,422 • Low Speed 1,553
Light Source :	N/A
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Wall Control System:	2 Wire Wall Control System (Included)
Special Features:	Convertible to Electronic Control System

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,090	31	101
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

	WC105-WH Wall Control
	• 4 Speed Fan Control • 2-Wire Installation

F524-CL | Coal Black Finish • Coal Black Blades



F524-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades



F524-DK | Distressed Koa Finish • Distressed Koa Blades



F524-ABD | Brushed Aluminum Finish • Silver Blades





F644L-CL

Coal Black Finish
Coal Black Blades
Etched Lens

ROTO FLUSH

3-Blades, 52" Sweep • 24° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

AC 153 x 15mm Motor

High Speed 4,078 • Low Speed 2,208

16W LED

1,000 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Cap for Non-Light Use (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,202	34	93

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F644L-BN | Brushed Nickel Finish • Silver Blades • Etched Lens



F644L-WHF | Flat White Finish • Flat White Blades • Etched Lens



*Shown with Cap
for Non-Light Use (Included)*



F535L-CL

Coal Black Finish
 Coal Black Blades
 Etched Lens

ROTO LED

3-Blades, 52” Sweep • 22° Blade Pitch • 6” Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations
 AC 153 x 15mm Motor
 High Speed 4,422 • Low Speed 1,553
 20W LED
 1,800 Delivered Lumens
 3,000K
 CRI 80
 Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,090	40	77
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F535L-ABD | Brushed Aluminum Finish • Silver Blades • Etched Lens



F535L-WHF | Flat White Finish • Flat White Blades • Etched Lens





F727-CL

Coal Black Finish
Coal Black Blades

RUDOLPH

3-Blades, 52” Sweep • 14° Blade Pitch • 6” Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations
AC 172 x 16mm Motor
High Speed 5,757 • Low Speed 1,554
Universal Light Kit Available (Sold Separately)
N/A
N/A
N/A
2-Wire Installation Wall Control System (Included)
Convertible to Electronic Control System

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,810	48	79
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

	WC116 Wall Control
	• 4 Speed Fan Control • 2-Wire Installation

F727-WHF | Flat White Finish • Flat White Blades



*Shown with Optional
Custom LED Light Kit (**K9727L-WHF**)*

F727-BN/MM | Brushed Nickel Finish • Medium Maple Blades





F727-ORB

Oil Rubbed Bronze Finish
Tobacco Blades

RUDOLPH

3-Blades, 52” Sweep • 14° Blade Pitch • 6” Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations
AC 172 x 16mm Motor
High Speed 5,757 • Low Speed 1,554
Universal Light Kit Available (Sold Separately)
N/A
N/A
N/A
2-Wire Installation Wall Control System (Included)
Convertible to Electronic Control System

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,810	48	79
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

	WC116 Wall Control
	• 4 Speed Fan Control • 2-Wire Installation

F727-DK | Distressed Koa Finish • Distressed Koa Blades



F727-BN/SL | Brushed Nickel Finish • Silver Blades



*Shown with Optional
Custom LED Light Kit (**K9727L-BN**)*



F745-ORB

Oil Rubbed Bronze
 Reversible Medium Maple/
 Dark Walnut Blades
 White Lens

SABOT

5-Blades, 52” Sweep • 12° Blade Pitch • 6” Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations
 DC 172 x 12mm Motor
 High Speed 4,941 • Low Speed 1,344
 18W LED
 1,682 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,255	22	148
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC600 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F745-CL | Coal Black Finish • Coal Black Blades • White Lens



F745-BN | Brushed Nickel Finish • Silver Blades • White Lens



F745-DK | Distressed Koa Finish • Reversible Medium Maple/Dark Walnut Blades • White Lens





F749L-BNK

Burnished Nickel Finish
Driftwood Blades (Solid Wood)
Etched Glass

SKYHAWK

3-Blades, 60" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

DC 153 x 15mm Motor

High Speed 7,284 • Low Speed 2,421

20W LED

1,104 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
5,004	27	187

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F749L-CL | Coal Black Finish • Coal Black Blades (Solid Wood) • Etched Glass



F749L-BN | Brushed Nickel Finish • Dark Walnut Blades (Solid Wood) • Etched Glass



F749L-WHF | Flat White Finish • Flat White Blades (Solid Wood) • Etched Glass





F767L-CL

Coal Black Finish
Coal Black Blades
Etched Lens

SKYMASTER

5-Blades, 65" Sweep • 16° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations
DC 120 x 25mm Motor
High Speed 6,500 • Low Speed 3,200
40W LED
1,100 Delivered Lumens
3,000K
CRI 90
Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
6,500	40	216
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F767L-WHF | Flat White Finish • Flat White Blades • Etched Lens



F767L-SBR/WHF | Soft Brass Finish • Flat White Blades • Etched Lens





F410L-WH

White Finish
White Blades
Etched Opal Glass

SLANT

3-Blades, 36" Sweep • 20° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

DC 125 x 20mm Motor

High Speed 3,859 • Low Speed 730

18W LED

508 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,393	16	153

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer





F868L-SBR/WHF

Soft Brass Finish

Flat White Blades

Etched Lens

Compatible with

Downrods in Finish CSBR

SLEEK

3-Blades, 60" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

DC 172 x 12mm Motor

High Speed 6,006 • Low Speed 1,715

16W LED

1,232 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,995	19	216

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RC600 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F868L-CL/CL | Coal Black Finish • Coal Black Blades • Etched Lens



F868L-WHF | Flat White Finish • Bleached Wood Finish Blades • Etched Lens



F868L-ORB | Oil Rubbed Bronze Finish • Seasoned Wood Finish Blades • Etched Lens



F868L-BN | Brushed Nickel Finish • Seasoned Wood Finish Blades • Etched Lens





F510L-CL

Coal Black Finish
Coal Black Blades
Etched Opal Glass

SPACESAVER

3-Blades, 26" Sweep • 14° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

AC 153 x 12mm Motor

High Speed 2,016 • Low Speed 664

20W Dimmable LED

601 Delivered Lumens

3,000K

CRI 90

3-Wire Installation Wall Control (Included)

Convertible to Electronic Control System

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
1,382	18	76

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



WC110L Wall Control

- 4 Speed Fan Control
- Full Range Light Dimmer

F510L-BS | Brushed Steel Finish • Silver Blades • Etched Opal Glass



F510L-WH | White Finish • White Blades • Etched Opal Glass



F510L-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades • Tinted Opal Glass





F729-CL

Coal Black Finish
Coal Black Blades

STEAL

3-Blades, 54” Sweep • 5° Blade Pitch • 6” Downrod



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 188 x 15mm Motor
CFM Range:	High Speed 6,093 • Low Speed 1,498
Light Source :	N/A
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Wall Control System:	2-Wire Installation Wall Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,939	37	107
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

	WC105-WH Wall Control
	• 4 Speed Fan Control • 2-Wire Installation

F729-GM | Gun Metal Finish • Gun Metal Blades



F729-WHF | Flat White Finish • Flat White Blades





F619L-CL/BN

Coal Black/ Brushed Nickel Finish
 Coal Black Blades
 Etched Lens

STOUT

5-Blades, 54" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - ETL Listed for Wet Locations
 AC 153 x 17mm Motor
 High Speed 4,602 • Low Speed 1,793
 16W LED
 1,272 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,286	43	76
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F619L-BN | Brushed Nickel Finish • Silver Blades • Etched Lens



F619L-WHF | Flat White Finish • Flat White Blades • Etched Lens





F562-WH

White Finish
White Blades

SUPRA[®] 32"

6-Blades, 32" Sweep • 22° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - UL Listed for Dry Locations
AC 153 x 16mm Motor
High Speed 4,075 • Low Speed 1,361
Universal Light Kit Adaptable (Sold Separately)
N/A
N/A
N/A
N/A
Optional Blade Finishes

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,034	39	53

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day •
Your cost depends on rates and use • The higher the airflow, the more air the fan will move.





F563-ORB
Oil Rubbed Bronze Finish
Medium Maple Blades

SUPRA[®] 44"

5-Blades, 44" Sweep • 14° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - UL Listed for Dry Locations
AC 153 x 16mm Motor
High Speed 5,064 • Low Speed 1,257
Universal Light Kit Adaptable (Sold Separately)
N/A
N/A
N/A
N/A
Optional Blade Finishes

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,360	48	71

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.

F563-WH | White Finish • White Blades





F568-BS/DW
Brushed Steel Finish
Dark Walnut Blades

SUPRA[®] 52"
5-Blades, 52" Sweep • 14° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - UL Listed for Dry Locations
Motor Type:	AC 188 x 15mm Motor
CFM Range:	High Speed 5,995 • Low Speed 1,665
Light Source :	Universal Light Kit Adaptable (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	N/A
Special Features:	Optional Blade Finishes

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,246	45	73
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F568-ORB | Oil Rubbed Bronze Finish • Medium Maple Blades



F568-WH | White Finish • White Blades





F569L-ORB

Oil Rubbed Bronze Finish
 Medium Maple Blades
 Opal Glass

SUPRA[®] 52" LED

5-Blades, 52" Sweep • 14° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - UL Listed for Dry Locations
Motor Type:	AC 188 x 15mm Motor
CFM Range:	High Speed 5,841 • Low Speed 1,372
Light Source :	4W Mini-Can LED Bulb (Included)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,746	46	81
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F569L-BS | Brushed Steel Finish • Silver Blades • Opal Glass



F569L-WH | White Finish • White Blades • Opal Glass





F543L-DK

Distressed Koa Finish
 Distressed Koa Blades
 Etched Lens

SWEPT

4-Blades, 56” Sweep • 26° Blade Pitch • 6” Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

DC MOTOR

BOND COMPATIBLE

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations
 DC 123 x 30mm Motor
 High Speed 6,896 • Low Speed 2,670
 20W Dimmable LED
 949 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,915	17	289
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F543L-KA | Kocoa Finish • Kocoa Blades • Etched Lens



F543L-CL | Coal Black Finish • Coal Black Blades • Etched Lens



F543L-WHF | Flat White Finish • Flat White Blades • Etched Lens





F828-BN/DW
Brushed Nickel Finish
Dark Walnut Blades
Etched Glass

SYMBIO

5-Blades, 56" Sweep • 15° Blade Pitch • 6" Downrod



Location Rating: Indoor Use - ETL Listed for Dry Locations
Motor Type: DC 125 x 30mm Motor
CFM Range: High Speed 6,117 • Low Speed 1,693
Light Source : 16W LED
Luminous Output: 710 Delivered Lumens
Color Temperature: 3,000K
Color Rendering Index: CRI 80
Wall Control System: 2 Wire Wall Control System (Included)
Special Features: Convertible to Electronic Control System

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,043	21	194
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F828-ORB | Oil Rubbed Bronze Finish • Medium Maple Blades • Etched Glass



F828-BN | Brushed Nickel Finish • Silver Blades • Etched Glass



F828-BN/WH | Brushed Nickel Finish • White Blades • Etched Glass



F828-WHF | Flat White Finish • Flat White Blades • Etched Glass





F747L-HBZ/AW

Heirloom Bronze
 Aged Boardwalk Blades
 Etched Lens

TIMBER 68"

3-Blades, 68" Sweep • 23° Blade Pitch • 10" Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

DC MOTOR

SMART FAN

Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	DC 172 x 25mm Motor
CFM Range:	High Speed 8,341 • Low Speed 3,834
Light Source :	26W LED
Luminous Output:	2,227 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	Hand Held Remote Control System (Included)
Special Features:	Cap for Non-Light Use (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
6,229	26	240
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC600 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F747L-HBZ/MP | Heirloom Bronze • Maple Blades • Etched Lens



F747L-BN/CL | Brushed Nickel • Coal Black Blades • Etched Lens



*Shown with Cap
for Non-Light Use (Included)*



F847L-HBZ/AW
 Heirloom Bronze
 Aged Boardwalk Blades
 Etched Lens

TIMBER 84"

3-Blades, 84" Sweep • 24° Blade Pitch • 10" Downrod

DRY LOCATION

REMOTE CONTROLLED

LED

DC MOTOR

BOND COMPATIBLE

ENERGY STAR

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

DC 172 x 25mm Motor

High Speed 8,794 • Low Speed 3,475

26W LED

2,227 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Cap for Non-Light Use Sold Separately

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
6,342	23	271

All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day - Your cost depends on rates and use - The higher the airflow, the more air the fan will move.

RC600 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer



F847L-HBZ/MP | Heirloom Bronze • Maple Blades • Etched Lens





F614-BNK

Burnished Nickel Finish
Seashore Grey Blades

TIMELESS

5-Blades, 54" Sweep • 14° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 188 x 15mm Motor
CFM Range:	High Speed 4,444 • Low Speed 1,920
Light Source :	Universal Light Kit Available (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	N/A

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,261	42	77
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F614-DBB | Dark Brushed Bronze Finish • Dark Maple Blades



F614-ORB | Oil Rubbed Bronze Finish • Medium Maple Blades





F614-PW

Pewter Finish
Dark Walnut Blades

TIMELESS

5-Blades, 54" Sweep • 14° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 188 x 15mm Motor
CFM Range:	High Speed 4,491 • Low Speed 1,921
Light Source :	Universal Light Kit Available (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	N/A

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,261	42	77
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F614-FB | French Beige Finish • Medium Maple Blades



F614-HBZ | Heirloom Bronze Finish • Aged Boardwalk Blades





F502L-BCW

Belcaro Walnut™ Finish
Belcaro Walnut™ Blades
Belcaro Walnut™ Glass

TRADITIONAL GYRO™

Twin Turbo Fans, 42" Sweep • 20° Blade Pitch • 4½" & 6" Downrod



Location Rating:

Motor Type:

CFM Range:

RPM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

AC 82 x 25mm Motor

High Speed 3,255 • Low Speed 2,063

High Speed 1,305 • Low Speed 906

4W Mini-Can LED Bulb

N/A

3,000K

N/A

Wall Control with Independent Fan Speeds & Rotation

Complete Assembly Rotates 360° at 2 RPM

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,472	76	33

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



WCS212 Wall Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer





F765L-CL

Coal Black Finish
Coal Black Blades
Etched Lens

TRANSONIC

5-Blades, 56" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

AC 172 x 16mm Motor

High Speed 5,810 • Low Speed 2,500

30W LED

2,280 Delivered Lumens

3,000K

CRI 80

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,259	43	99

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F765L-BN/SL | Brushed Nickel Finish • Silver Blades • Etched Lens



F765L-WHF | Flat White Finish • Flat White Blades • Etched Lens





F678L-DK

Distressed Koa Finish
Distressed Koa Blades
Etched Lens

TWIST

3-Blades, 52" Sweep • 16° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

DC 120 x 15mm Motor

High Speed 5,330 • Low Speed 1,804

20W LED

1,049 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,677	21	175

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F678L-GRY | Grey Finish • Grey Blades • Etched Lens



F678L-WHF | Flat White Finish • Flat White Blades • Etched Lens



F678L-CL | Coal Black Finish • Coal Black Blades • Etched Lens





F692L-CL

Coal Black Finish
 Coal Black Blades
 Clear Lens

VEER

3-Blades, 56" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations
 AC 172 x 20mm Motor
 High Speed 5,000 • Low Speed 2,000
 20W LED
 1,306 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,697	47	76
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS213-S Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F692L-BN/SL | Brushed Nickel Finish • Silver Blades • Clear Lens



F692L-WHF | Flat White Finish • Flat White Blades • Clear Lens





F802L-KA

Kocoa Finish
Kocoa Blades
Tinted Opal Glass

VINTAGE GYRO™

Twin Turbo Fans, 42" Sweep • 20° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

RPM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

AC 82 x 25mm Motor

High Speed 3,255 • Low Speed 2,063

High Speed 1,310 • Low Speed 930

4W Mini-Can LED Bulb

N/A

3,000K

N/A

Wall Control with Independent Fan Speeds & Rotation

Complete Assembly Rotates 360° at 2 RPM

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,879	69	42

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



WCS212 Wall Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F802L-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades • Tinted Opal Glass





F676L-CL

Coal Black Finish
Coal Black Blades
White Lens

VITAL

3-Blades, 44" Sweep • 21° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	AC 153 x 15mm Motor
CFM Range:	High Speed 3,278 • Low Speed 1,354
Light Source :	16W LED
Luminous Output:	1,008 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	N/A

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,386	34	69
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day - Your cost depends on rates and use - The higher the airflow, the more air the fan will move.		

F676L-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades • White Lens



F676L-BRS/SL | Brilliant Silver Finish • Silver Blades • White Lens



F676L-WHF | Flat White Finish • Flat White Blades • White Lens





F702L-BCW

Belcaro Walnut™ Finish Natural
Walnut Blades
Aged Champagne Glass

VOLTERRA™

5-Blades, 52" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Indoor Use - ETL Listed for Dry Locations
AC 172 x 20mm Motor
High Speed 5,134 • Low Speed 1,974
4W Mini-Can LED Bulbs (Included)
577 Delivered Lumens
2,700K
CRI 90
Wall Control System, Independent Up/Downlight (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,652	47	78
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

	WCS213 Wall Control
	• 3 Speed Fan Control • On/Off Plus Full Range Light Dimmer

F702L-VB | Volterra Bronze™ Finish • Natural Walnut Blades • French Scavo Glass





F551-ORB
Oil Rubbed Bronze Finish
Rustic Wood Blades

WATT

5-Blades, 60” Sweep • 13° Blade Pitch • 6” Downrod • 3-Speed Pull Chain



Location Rating:	Indoor Use - UL Listed for Dry Locations
Motor Type:	DC 125 x 30mm Motor
CFM Range:	High Speed 6,068 • Low Speed 2,525
Light Source :	Universal Light Kit Adaptable (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Wall Control System:	Wall Control Optional (WDC 1300)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,407	21	206
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day - Your cost depends on rates and use - The higher the airflow, the more air the fan will move.		

F551-BN | Brushed Nickel Finish • Silver Blades



F551-WH | White Finish • White Blades



F551-PN | Polished Nickel Finish • Dark Maple Blades





F552L-BNK
Burnished Nickel Finish
Savannah Grey Blades
White Frosted Glass

WATT II

5-Blades, 60" Sweep • 13° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Indoor Use - UL Listed for Dry Locations

DC 125 x 30mm Motor

High Speed 6,028 • Low Speed 2,513

9W LED

1,234 Delivered Lumens

3,000K

CRI 90

Wall Control Optional (WDCI300)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,991	20	251

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.

F552L-BN | Brushed Nickel Finish • Silver Blades • White Frosted Glass



F552L-WH | White Finish • White Blades • White Frosted Glass



F552L-CL | Coal Black Finish • Coal Black Blades • White Frosted Glass



F552L-ORB | Oil Rubbed Bronze Finish • Rustic Wood Blades • White Frosted Glass





F854-WH

White Finish
White Blades

WAVE 44"

3-Blades, 44" Sweep • Variable Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

AC 153 x 17mm Motor

High Speed 3,657 • Low Speed 1,628

N/A

N/A

N/A

N/A

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,706	40	68
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F854-CL | Coal Black Finish • Coal Black Blades



F854-DK | Distressed Koa Finish • Distressed Koa Blades





F843-DRF

Driftwood Finish
Driftwood Blades

WAVE 52"

3-Blades, 52" Sweep • Variable Blade Pitch • 6" Downrod

DRY
LOCATION

REMOTE
CONTROLLED

BOND
COMPATIBLE

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations

AC 172 x 14mm Motor

High Speed 4,466 • Low Speed 1,674

N/A

N/A

N/A

N/A

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,229	43	75
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F843-CL | Coal Black Finish • Coal Black Blades



F843-DK | Distressed Koa Finish • Distressed Koa Blades



F843-SL | Silver Finish • Silver Blades



F843-WH | White Finish • White Blades





F855-SL

Silver Finish
Silver Blades

WAVE 65"

3-Blades, 65" Sweep • Variable Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor Use - ETL Listed for Dry Locations
AC 188 x 20mm Motor
High Speed 5,713 • Low Speed 1,871
N/A
N/A
N/A
N/A
Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,914	52	75
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F855-CL | Coal Black Finish • Coal Black Blades



F855-DK | Distressed Koa Finish • Distressed Koa Blades



F855-WH | White Finish • White Blades





F887-72-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze Blades

XTREME 72"

9-Blades, 72" Sweep • 4° Blade Pitch • 6" Downrod

DRY LOCATION

REMOTE CONTROLLED

DC MOTOR

BOND COMPATIBLE

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor Use - ETL Listed for Dry Locations

DC 165 x 30mm Motor

High Speed 10,942 • Low Speed 4,673

N/A

N/A

N/A

N/A

Hand Held Remote Control System (Included)

Aluminum Blades

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
10,942	33	331
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer



F887-72-BN | Brushed Nickel Finish • Silver Blades





F887-96-BN
 Brushed Nickel Finish
 Silver Blades

XTREME 96"

9-Blades, 96" Sweep • 4° Blade Pitch • 6" Downrod

DRY LOCATION

REMOTE CONTROLLED

DC MOTOR

BOND COMPATIBLE

Location Rating:	Indoor Use - ETL Listed for Dry Locations
Motor Type:	DC 165 x 30mm Motor
CFM Range:	High Speed 13,080 • Low Speed 9,152
Light Source :	N/A
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	Hand Held Remote Control System (Included)
Special Features:	Aluminum Blades

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
13,080	31	429
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer



F887-96-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades







INDOOR/OUTDOOR FANS

Experience the perfect blend of style and versatility with the Minka-Aire® Indoor/Outdoor Fan collection. Built for performance in any environment, these fans add elegance to your space, whether indoors or outdoors. With a variety of designs to choose from, our fans are built to thrive in diverse environments while adding a touch of elegance to your home.



F523L-ABD

Brushed Aluminum Finish

Silver Blades

Etched Opal Glass

Shown with Cap

for Non-Light Use (Included)

ALUMA WET

3-Blades, 52" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations

AC 153 x 20mm Motor

High Speed 3,864 • Low Speed 1,861

20W Dimmable LED

905 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Aluminum Construction

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,925	34	85

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F523L-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades • Tinted Opal Glass



F523L-WHF | Flat White Finish • Flat White Blades • Etched Opal Glass





F307-MBK

Matte Black Finish
Matte Black Blades

ANYWHERE

Turbo Fan, 16" Diameter • Oscillates 45° Side to Side • 3-Speed Pull Chain



Location Rating:

Motor Type:

CFM Range:

RPM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations

AC 82 x 25mm Motor

High Speed 1,122 • Low Speed 605

3-Speed Settings: 491, 650, and 985 RPM

N/A

N/A

N/A

N/A


Convertible to Hardware or Wall Plug (118" Heavy-Duty Cord)

Complete Assembly Rotates 360° at 2 RPM



F307-COVER
*Weather Cover (Included)
(Also sold separately)*



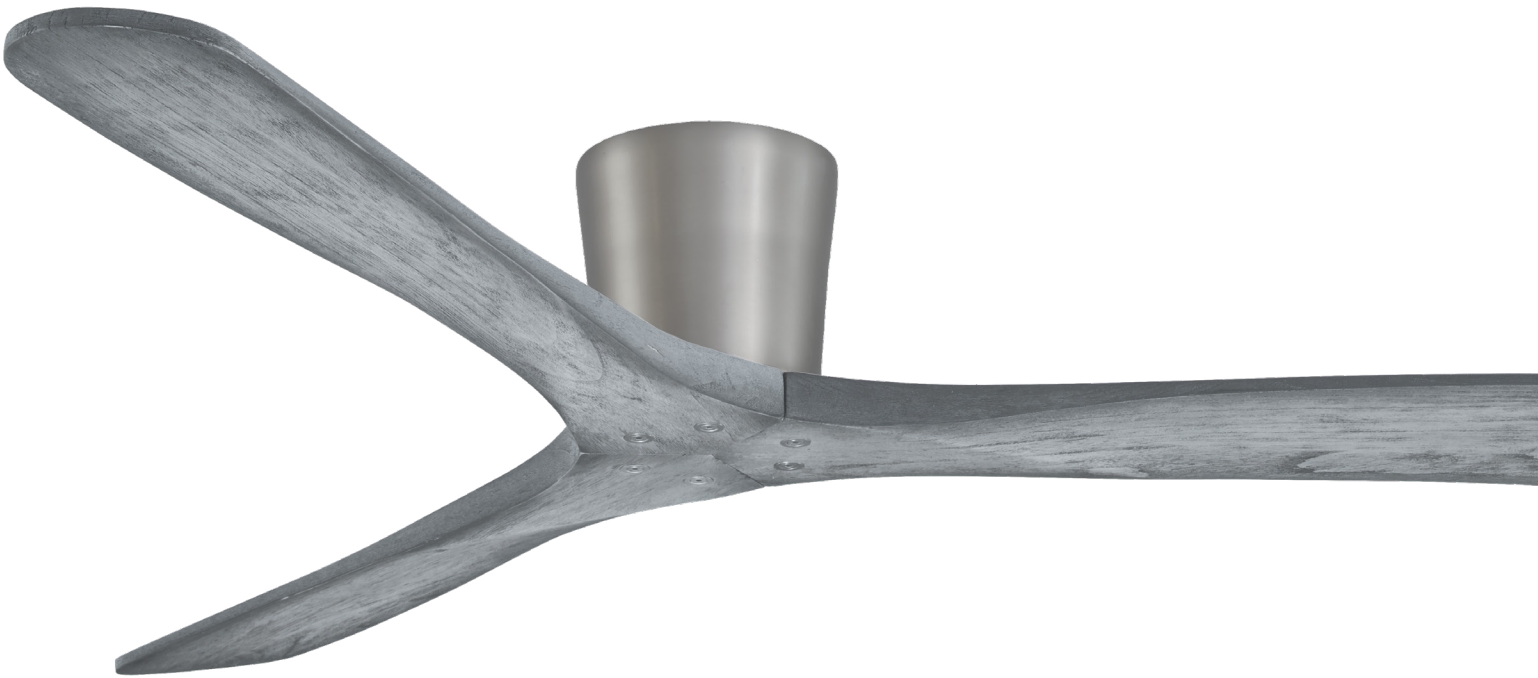

F663-BS/SWG
Brushed Steel Finish
Smoked Weathered Grey Blades

AVTUR

3-Blades, 60” Sweep • 16° Blade Pitch • Flush Mount



Location Rating:	Indoor/Outdoor Use - UL Listed for Damp Locations
Motor Type:	DC 85 x 28mm Motor
CFM Range:	High Speed 5,400 • Low Speed 2,000
Light Source :	N/A
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	Hand Held Remote Control System (Included)
Special Features:	Constructed with Real Wood

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
5,400	20	270
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		




RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F663-WHF/BW | Flat White Finish • Bleached Wood Blades



F663-SBR/WHF | Soft Brass Finish • Flat White Wood Blades

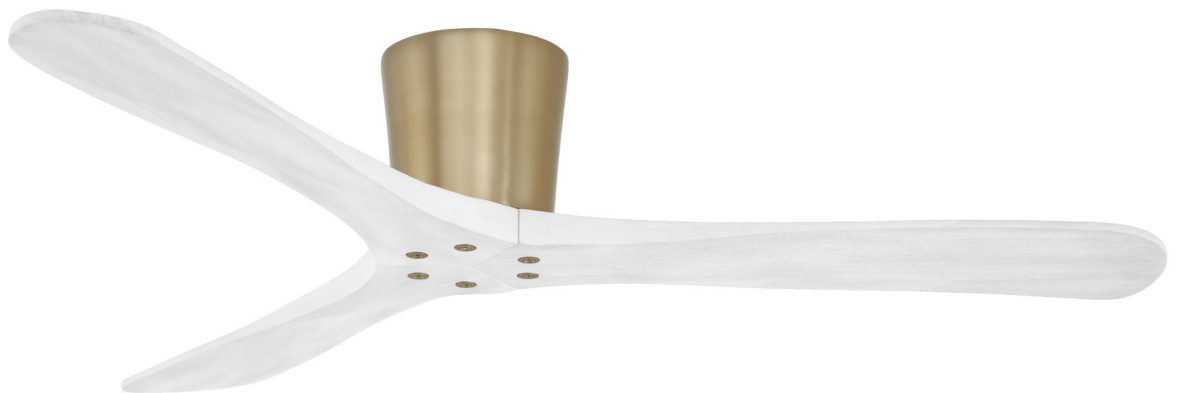



F865L-CL/SG

Coal Black Finish
 Textured Seashore Grey Blades
 Clear Ribbed Glass

BARN H2O

10-Blades, 84" Sweep • 16° Blade Pitch • 10" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations
 DC 168 x 30mm Motor
 High Speed 12,402 • Low Speed 4,550
 40W LED
 2,085 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control System (Included)
 Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
8,721	30	294
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F865L-HBZ | Heirloom Bronze Finish • Textured Barnwood Blades • Clear Ribbed Glass



F865L-BNK | Burnished Nickel Finish • Textured Savannah Grey Blades • Clear Ribbed Glass





F781L-BNW

Brushed Nickel Wet Finish
Silver Blades
Etched Lens

CHUBBY

5-Blades, 58" Sweep • 18° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - ETL Listed for Wet Locations
DC 120 x 25mm Motor
High Speed 6,391 • Low Speed 2,733
40W LED
2,303 Delivered Lumens
3,000K
CRI 90
Hand Held Remote Control System (Included)
Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,676	23	207
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day - Your cost depends on rates and use - The higher the airflow, the more air the fan will move.		



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F781L-WHF | Flat White Finish • Flat White Blades • Etched Lens



F781L-CL | Coal Black Finish • Coal Black Blades • Etched Lens





F782L-CL

Coal Black Finish
Coal Black Blades
Etched Lens

CHUBBY II

5-Blades, 58" Sweep • 18° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - ETL Listed for Wet Locations

DC 120 x 25mm Motor

High Speed 6,431 • Low Speed 2,656

40W LED

2,008 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,661	24	196

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F782L-BNW | Brushed Nickel Wet Finish • Silver Blades • Etched Lens



F782L-WHF | Flat White Finish • Flat White Blades • Etched Lens





F476L-BNW

Brushed Nickel Wet Finish

Silver Blades

White Opal Glass

CONCEPT™ I WET 52"

3-Blades, 52" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations

AC 188 x 20mm Motor

High Speed 5,389 • Low Speed 2,821

16W LED

648 Delivered Lumens

3,000K

CRI 80

Full Function Wall Control System (Included)

Construction Grade Polymer

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,108	38	106

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



WCS212 Wall Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F476L-ORB | Oil Rubbed Bronze Finish • Taupe Blades • Pietra Glass



F476L-WH | White Finish • White Blades • White Opal Glass



*Shown with Cap
for Non-Light Use (Included)*



F477L-ORB

Oil Rubbed Bronze Finish
 Oil Rubbed Bronze Blades
 Pietra Glass

CONCEPT™ | WET 58"

3-Blades, 58" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations
 AC 188 x 22mm Motor
 High Speed 5,491 • Low Speed 2,573
 16W LED
 300 Delivered Lumens
 2,700K
 CRI 90
 Full Function Wall Control System (Included)
 Marine Grade Stainless Steel Construction

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,103	44	93
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

WCS212 Wall Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F477L-BNW | Brushed Nickel Wet Finish • Silver Blades • White Opal Glass



F477L-WH | White Finish • White Blades • White Opal Glass



*Shown with Cap
for Non-Light Use (Included)*



F474L-ORB

Oil Rubbed Bronze Finish

Taupe Blades

Pietra Glass

CONCEPT™ II WET

3-Blades, 52" Sweep • 14° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations

AC 188 x 20mm Motor

High Speed 5,363 • Low Speed 2,394

16W LED

648 Delivered Lumens

2,700K

CRI 90

Full Function Wall Control System (Included)

Construction Grade Polymer

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,103	44	93

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



WCS212 Wall Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer





F467L-BNW

Brushed Nickel Wet Finish

Silver Blades

Etched Opal Glass

CONCEPT™ III

3-Blades, 54" Sweep • 14° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - ETL Listed for Wet Locations

DC 153 x 15mm Motor

High Speed 6,056 • Low Speed 1,637

30W LED

980 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,985	19	212

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F467L-CL | Coal Black Finish • Coal Black Blades • Etched Opal Glass



F467L-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades • Etched Opal Glass



F467L-WH | White Finish • White Blades • Etched Opal Glass





F465L-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze Blades
Etched Opal Glass

CONCEPT™ IV

3-Blades, 54" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - ETL Listed for Wet Locations

DC 153 x 15mm Motor

High Speed 6,249 • Low Speed 1,668

30W LED

980 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,101	20	204

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F465L-CL | Coal Black Finish • Coal Black Blades • Etched Opal Glass



F465L-BNW | Brushed Nickel Wet Finish • Silver Blades • Etched Opal Glass



F465L-WH | White Finish • White Blades • Etched Opal Glass





F866L-CL

Coal Black Finish
Coal Black Blades
Clear Lens

DECO

6-Blades, 65" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - ETL Listed for Wet Locations
DC 156 x 12mm Motor
High Speed 7,978 • Low Speed 3,980
24W LED Variable CCT
1,459 Delivered Lumens
3,000K
CRI 90
Hand Held Remote Control System (Included)
Adjustable CCT LED Lighting

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
6,104	21	291
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F866L-BNW | Brushed Nickel Wet Finish • Silver Blades • Clear Lens



F866L-WHF | Flat White Finish • Flat White Blades • Clear Lens





F756L-BNW

Brushed Nickel Finish
Silver Blades
Etched Lens

FUTURE

8-Blades, 65" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - ETL Listed for Wet Locations

DC 125 x 15mm Motor

High Speed 6,500 • Low Speed 2,000

30W LED

2,113 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,661	24	196


All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RC1000 Remote Control


- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F756L-WHF | Flat White Finish • Flat White Blades • Etched Lens

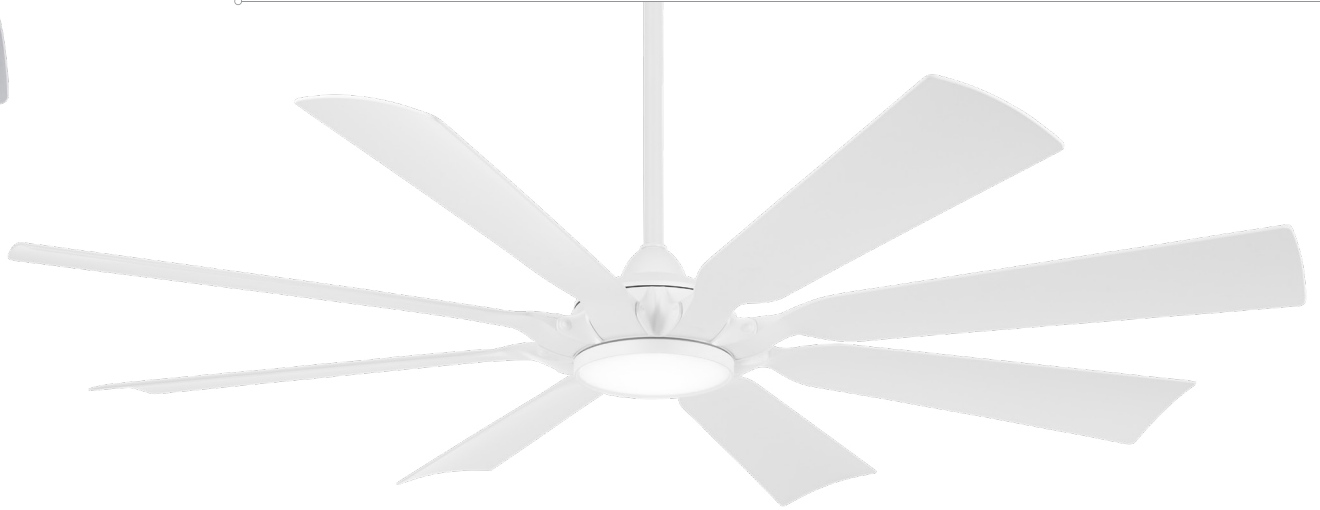

F756L-CL | Coal Black Finish • Coal Black Blades • Etched Lens



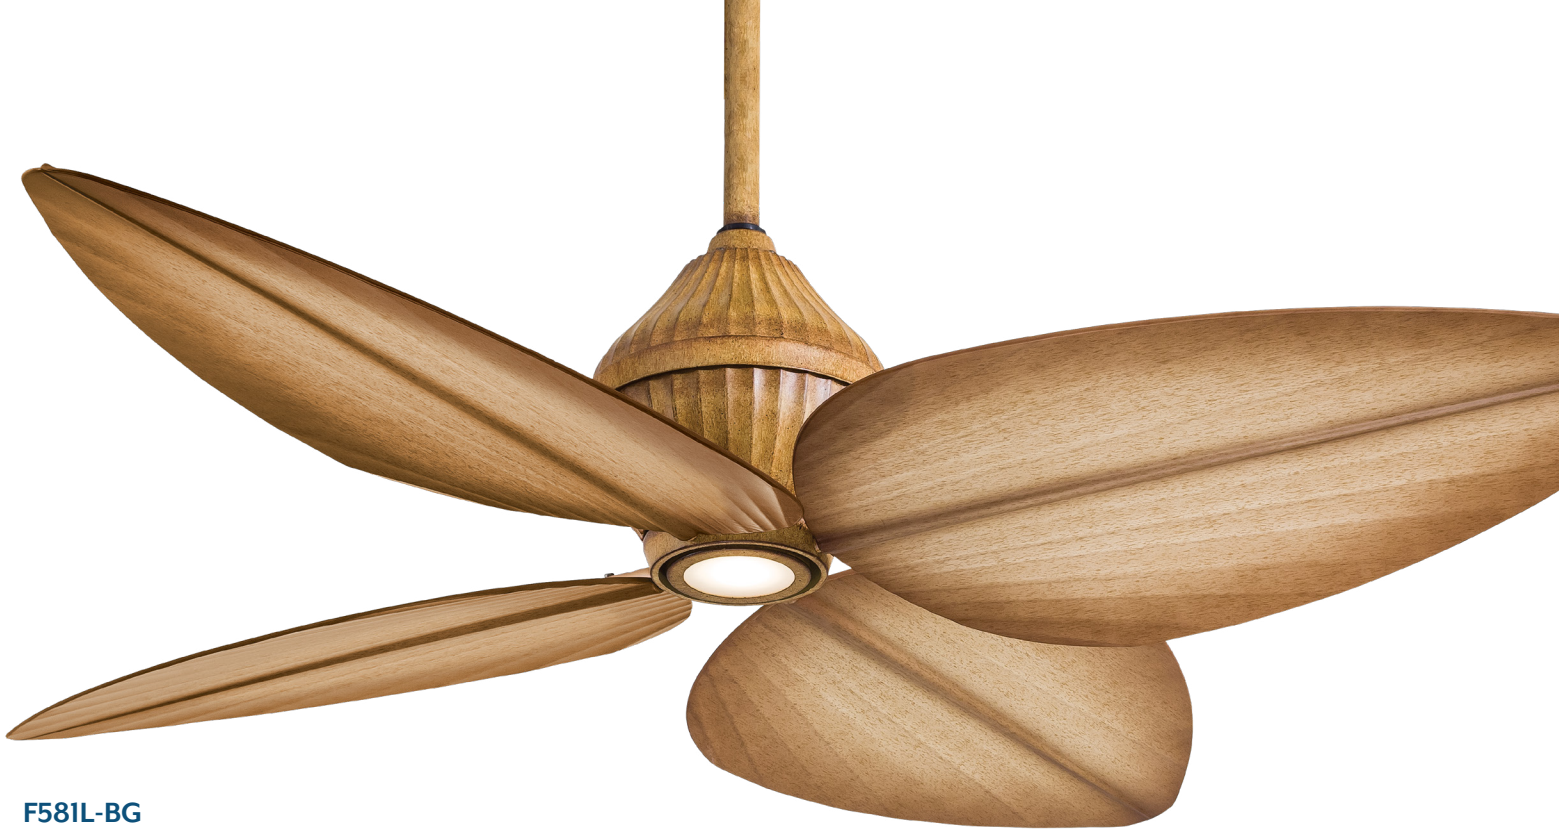

F581L-BG

Bahama Beige™ Finish
 Bahama Beige™ Blades
 Etched Opal Glass

GAUGUIN™

4-Blades, 52" Sweep • 14° Blade Pitch • 6" Downrod

WET LOCATION

WALL CONTROL

LED

BOND COMPATIBLE

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations
 AC 188 x 20mm Motor
 High Speed 5,201 • Low Speed 2,522
 7W GU10 LED Bulb
 401 Delivered Lumens
 3,000K
 CRI 90
 Full Function Wall Control System (Included)
 Stainless Steel Hardware & All Weather Blades

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,945	38	103
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

WCS212 Wall Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F581L-BG
Shown with
Optional **A581-BG** Ceiling Adapter
For Flush Mount Applications



F581L-ORB | Oil Rubbed Bronze Finish • Bahama Beige™ Blades • Etched Opal Glass



F581L-WHF | Flat White Finish • Flat White Blades • Etched Opal Glass





F681L-ORB

Oil Rubbed Bronze Finish

Dark Pine Blades

Clear Fresnel Lens

GROTON

5-Blades, 56" Sweep • 12° Blade Pitch • 10" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - UL Listed for Wet Locations

AC 188 x 22mm Motor

High Speed 5,675 • Low Speed 2,000

20W Dimmable LED

1,354 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,952	36	108

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RCS212 Remote Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer



F402L-ORB

Oil Rubbed Bronze Finish

Oil Rubbed Bronze Blades

Etched Opal School House Globe Glass

GYRO™ WET

Twin Turbo Fans, 42" Sweep • 20° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

RPM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Wall Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations

AC 82 x 25mm Motor

High Speed 3,474 • Low Speed 1,954

High Speed 1,500 • Low Speed 1,000

4W Mini-Can LED Bulb

N/A

3,000K

N/A

Wall Control with Independent Fan Speeds & Rotation

Complete Assembly Rotates 360° at 2 RPM

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,61	76	36

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



WCS212 Wall Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer



F753-KA

Kocoa Finish
Kocoa Blades

JAVA

3-Blades, 54” Sweep • 14° Blade Pitch • 6” Downrod

WET
LOCATION

REMOTE
CONTROLLED

BOND
COMPATIBLE

Location Rating:	Indoor/Outdoor Use - UL Listed for Wet Locations
Motor Type:	AC 153 x 18mm Motor
CFM Range:	High Speed 5,357 • Low Speed 2,782
Light Source :	N/A
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,113	32	128
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F753-BNW | Brushed Nickel Wet Finish • Silver Blades



F753-CL | Coal Black Finish • Coal Black Blades



F753-WHF | Flat White Finish • Flat White Blades



F753-PN | Polished Nickel Finish • Silver Blades (Finish for Indoor Use Only)





F753L-CL

Coal Black Finish
 Coal Black Blades
 Etched Opal Glass

JAVA LED

3-Blades, 54" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:	Indoor/Outdoor Use - UL Listed for Wet Locations
Motor Type:	AC 153 x 18mm Motor
CFM Range:	High Speed 5,771 • Low Speed 2,834
Light Source :	18W LED
Luminous Output:	489 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 90
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,394	34	131
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F753L-BNW | Brushed Nickel Wet Finish • Silver Blades • Etched Opal Glass



F753L-KA | Kocoa Finish • Kocoa Blades • Etched Opal Glass



F753L-WHF | Flat White Finish • Flat White Blades • Etched Opal Glass



F753L-PN | Polished Nickel Finish • Silver Blades • Etched Opal Glass (Finish for Indoor Use Only)





F754L-KA

Kocoa Finish
Kocoa Blades
Etched Lens

JAVA XTREME

3-Blades, 84" Sweep • 16° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - ETL Listed for Wet Locations
DC 120 x 25mm Motor
High Speed 5,614 • Low Speed 2,781
40W LED
2,253 Delivered Lumens
3,000K
CRI 90
Hand Held Remote Control System (Included)
Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
6,414	21	301
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F754L-WHF | Flat White Finish • Flat White Blades • Etched Lens



F754L-BNW | Brushed Nickel Wet Finish • Silver Blades • Etched Lens





F742L-SBR

Soft Brass Finish
 Seashore Grey Blades
 Etched White Glass

MOLINO

3-Blades, 65” Sweep • 14° Blade Pitch • 6” Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - ETL Listed for Wet Locations
 DC 153 x 15mm Motor
 High Speed 7,166 • Low Speed 2,772
 20W LED
 721 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control System (Included)
 Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
5,106	30	173
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F742L-BNK | Burnished Nickel Finish • Seashore Grey Blades • Etched White Glass



F742L-CL/SG | Coal Black Finish • Seashore Grey Blades • Etched White Glass





F582L-ORB

Oil Rubbed Bronze Finish
Taupe Blades
Vintage Amber Glass Lens

RAINMAN™

5-Blades, 54" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations

AC 172 x 20mm Motor

High Speed 4,824 • Low Speed 1,988

9W Medium-Base LED Bulb

810 Delivered Lumens

3,000K

CRI 90

Wall Control System (Included)

Stainless Steel Hardware & All Weather Blades

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,495	39	89

All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day - Your cost depends on rates and use - The higher the airflow, the more air the fan will move.



WCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F582L-GL | Galvanized Finish • Silver Blades • Acid Etched Glass





F624-ORB

Oil Rubbed Bronze Finish
Oil Rubbed Bronze Blades

ROTO XL

3-Blades, 62" Sweep • 20° Blade Pitch • 6" Downrod



Location Rating:	Indoor/Outdoor Use - ETL Listed for Wet Locations
Motor Type:	AC 172 x 16mm Motor
CFM Range:	High Speed 6,576 • Low Speed 2,637
Light Source :	N/A
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Wall Control System:	2-Wire Installation Wall Control System (Included)
Special Features:	Convertible to Electronic Control System

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,730	45	106
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

	WC115 Wall Control
	• 4 Speed Fan Control • 2-Wire Installation

F624-CL | Coal Black Finish • Coal Black Blades



F624-ABD | Brushed Aluminum Finish • Silver Blades



F624-WHF | Flat White Finish • Flat White Blades





F728-ORB

Oil Rubbed Bronze Finish
Tobacco Blades

RUDOLPH WET

3-Blades, 60" Sweep • 16° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - ETL Listed for Wet Locations
DC 145 x 18mm Motor
High Speed 5,800 • Low Speed 3,000
N/A
N/A
N/A
N/A
Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,500	48	93.75
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F728-CL | Coal Black Finish • Coal Black Blades



F728-WHF | Flat White Finish • Flat White Blades





F675L-CL

Coal Black Finish
 Coal Black Blades
 Etched Glass

SEACREST

3-Blades, 60” Sweep • 14° Blade Pitch • 6” Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations
 DC 153 x 10mm Motor
 High Speed 5,752 • Low Speed 1,827
 20W Dimmable LED
 668 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control System (Included)
 Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,912	20	192
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day - Your cost depends on rates and use - The higher the airflow, the more air the fan will move.		

RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer



F675L-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades • Etched Glass





F786-ORB

Oil Rubbed Bronze Finish
Medium Maple Blades

SIMPLE 44"

3-Blades, 44" Sweep • 26° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - ETL Listed for Wet Locations
DC 123 x 30mm Motor
High Speed 5,289 • Low Speed 1,626
20W LED Light Kit - K9787L (Sold Separately)
N/A
N/A
N/A
Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,572	29	122
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day - Your cost depends on rates and use - The higher the airflow, the more air the fan will move.		



RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F786-SBR/CL | Soft Brass Finish • Coal Black Blades



F786-CL | Coal Black Finish • Coal Black Blades





F786-BNW

Brushed Nickel Wet Finish
Silver Blades

SIMPLE 44"

3-Blades, 44" Sweep • 26° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - ETL Listed for Wet Locations
DC 123 x 30mm Motor
High Speed 5,289 • Low Speed 1,626
20W LED Light Kit - K9787L (Sold Separately)
N/A
N/A
N/A
Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,572	29	122
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F786-SL | Silver Finish • Silver Blades



F786-WHF | Flat White Finish • Flat White Blades





F787-CL

Coal Black Finish
Coal Black Blades

SIMPLE 52"

3-Blades, 52" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - ETL Listed for Wet Locations
DC 123 x 30mm Motor
High Speed 6,231 • Low Speed 2,009
20W LED Light Kit - K9787L (Sold Separately)
N/A
N/A
N/A
Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)


AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,310	16	277
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F787-SBR/CL | Soft Brass Finish • Coal Black Blades

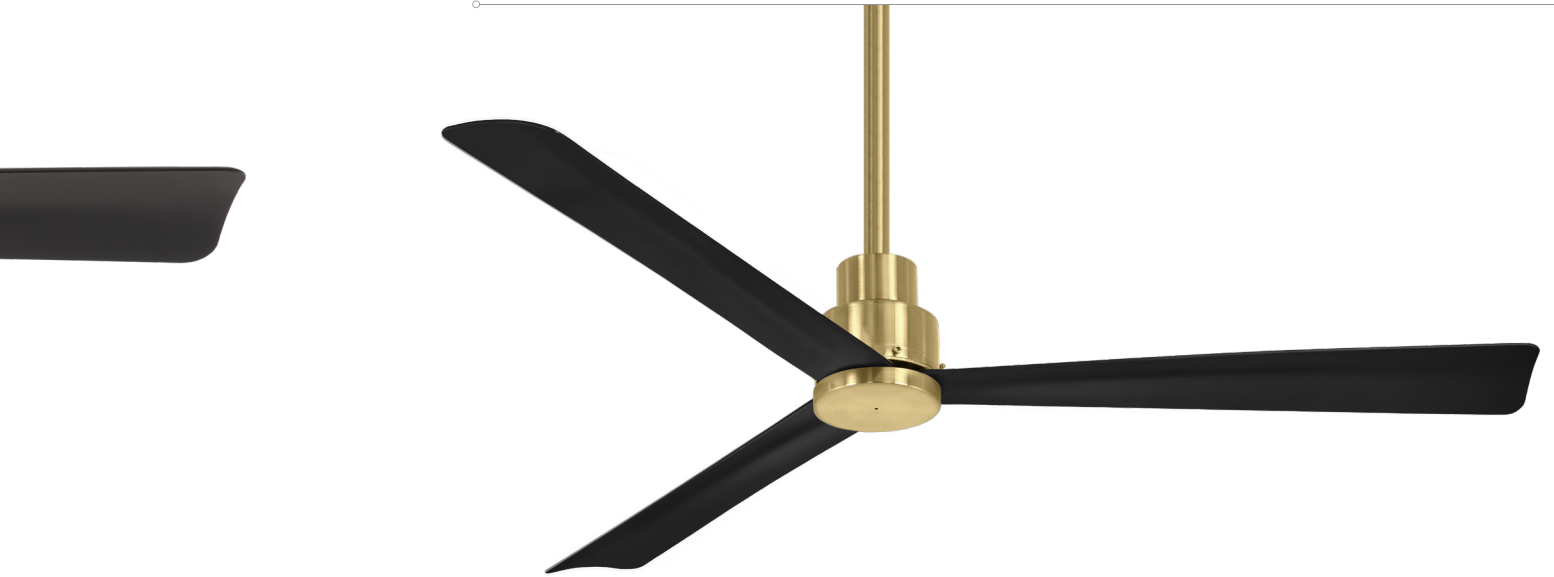

F787-ORB | Oil Rubbed Bronze Finish • Medium Maple Blades





F787-BNW

Brushed Nickel Wet Finish
Silver Blades

SIMPLE 52"

3-Blades, 52" Sweep • 14° Blade Pitch • 6" Downrod

WET LOCATION

REMOTE CONTROLLED

DC MOTOR

BOND COMPATIBLE

ENERGY STAR

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - ETL Listed for Wet Locations
DC 123 x 30mm Motor
High Speed 6,231 • Low Speed 2,009
20W LED Light Kit - K9787L (Sold Separately)
N/A
N/A
N/A
Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,310	16	277
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F787-SL | Silver Finish • Silver Blades



F787-WHF | Flat White Finish • Flat White Blades





F789-BNW

Brushed Nickel Wet Finish
Silver Blades

SIMPLE 65"

3-Blades, 65" Sweep • 14° Blade Pitch • 6" Downrod

Location Rating:	Indoor/Outdoor Use - ETL Listed for Wet Locations
Motor Type:	DC 123 x 30mm Motor
CFM Range:	High Speed 5,289 • Low Speed 1,626
Light Source :	20W LED Light Kit - K9787L (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,572	29	122
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F789-CL | Coal Black Finish • Coal Black Blades



Shown with Optional
LED Light Kit (**K9787L-CL**)

F789-SL | Silver Finish • Silver Blades



F789-ORB | Oil Rubbed Bronze Finish • Medium Maple Blades



F789-WHF | Flat White Finish • Flat White Blades





F873-CL
Coal Black Finish
Coal Black Blades
*Shown with Optional
LED Light Kit (K9873L-CL)*

SIMPLE FLUSH 52"

3-Blades, 52" Sweep • 18° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - ETL Listed for Wet Locations

DC 123 x 15mm Motor

High Speed 5,500 • Low Speed 2,000

20W LED Light Kit (Sold Separately)

1,100 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,846	22	177
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F873-GRY | Grey Finish • Grey Blades



F873-WHF | Flat White Finish • Flat White Blades





F874-GRY

Grey Finish
Grey Blades

SIMPLE FLUSH 60"

3-Blades, 60" Sweep • 18° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - ETL Listed for Wet Locations
DC 123 x 15mm Motor
High Speed 6,000 • Low Speed 2,200
20W LED Light Kit (Sold Separately)
1,100 Delivered Lumens
3,000K
CRI 90
Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,447	21	214
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F874-CL | Coal Black Finish • Coal Black Blades



*Shown with Optional
LED Light Kit (**K9873L-CL**)*

F874-WHF | Flat White Finish • Flat White Blades





F625L-WHF

Flat White Finish
Flat White Blades
Etched Lens

SKINNIE 44"

3-Blades, 4" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations

DC 123 x 15mm Motor

High Speed 6,000 • Low Speed 3,000

20W LED

1,143 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,000	24	125

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F625L-CL | Coal Black Finish • Coal Black Blades • Etched Lens



F625L-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades • Etched Lens





F626L-GRY

Grey Finish
 Grey Blades
 Etched Lens

SKINNIE 56"

3-Blades, 56" Sweep • 18° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations
 DC 123 x 30mm Motor
 High Speed 8,037 • Low Speed 3,069
 20W LED
 1,169 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control System (Included)
 Remote has 1,024 Frequency Combinations

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
5,708	24	236
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F626L-CL | Coal Black Finish • Coal Black Blades • Etched Lens



F626L-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades • Etched Lens



F626L-WHF | Flat White Finish • Flat White Blades • Etched Lens





F888L-CL/DK

Coal Black Finish
 Distressed Koa Blades
 Etched Opal Glass

SLIPSTREAM

8-Blades, 65" Sweep • 14° Blade Pitch • 6" Downrod

WET LOCATION

REMOTE CONTROLLED

LED

DC MOTOR

BOND COMPATIBLE

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - ETL Listed for Wet Locations
 DC 165 x 25mm Motor
 High Speed 8,243 • Low Speed 3,918
 18W Dimmable LED
 875 Delivered Lumens
 3,000K
 CRI 90
 Hand Held Remote Control System (Included)
 Cap for Non-Light Use (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
6,216	22	285
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F888L-CL | Coal Black Finish • Coal Black Blades • Etched Opal Glass



F888L-DK | Distressed Koa Finish • Distressed Koa Blades • Tinted Opal Glass





F888L-BNW


Brushed Nickel Wet Finish

Silver Blades

Etched Opal Glass

SLIPSTREAM

8-Blades, 65" Sweep • 14° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - ETL Listed for Wet Locations

DC 165 x 25mm Motor

High Speed 8,243 • Low Speed 3,918

18W Dimmable LED

875 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Cap for Non-Light Use (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
6,216	22	285

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.



RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F888L-ORB | Oil Rubbed Bronze • Oil Rubbed Bronze Blades • Tinted Opal Glass



F888L-WHF | Flat White Finish • Flat White Blades • Etched Opal Glass





F734L-ORB

Oil Rubbed Bronze Finish
 Oil Rubbed Bronze Blades
 Tinted Opal Glass

STRATA

4-Blades, 52" Sweep • 12° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - UL Listed for Wet Locations
 AC 172 x 17mm Motor
 High Speed 4,624 • Low Speed 1,938
 4W Mini-Can LED Bulb
 94 Delivered Lumens
 2,700K
 CRI 80
 Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,365	34	98
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RCS213 Remote Control

- 3 Speed Fan Control
- On/Off Plus Full Range Light Dimmer

F734L-SI | Smoked Iron Finish • Smoked Iron Finish Blades • Etched Opal Glass



F734L-GL | Galvanized Finish • Silver Blades • Etched Opal Glass



*Shown with Cap
for Non-Light Use (Included)*



F572-ORB

Oil Rubbed Bronze
Dark Oak Finish Blades

SUNDANCE™ 42"

5-Blades, 42" Sweep • 12° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations
AC 153 x 10mm Motor
High Speed 3,410 • Low Speed 1,371
UL Wet Location Light Kit - K9401L (Sold Separately)
N/A
N/A
N/A
N/A
Stainless Steel Hardware & All Weather Blades

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,388	33	73

All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day •
Your cost depends on rates and use • The higher the airflow, the more air the fan will move.

F572-CL | Coal Black Finish • Coal Black Blades



F572-WH | White Finish • White Blades





F571-WH

White Finish
White Blades

SUNDANCE™ 52"

5-Blades, 52" Sweep • 12° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations
AC 153 x 15mm Motor
High Speed 5,596 • Low Speed 2,090
UL Wet Location Light Kit - K9401L (Sold Separately)
N/A
N/A
N/A
N/A
Stainless Steel Hardware & All Weather Blades

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,946	40	98
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F571-ORB | Oil Rubbed Bronze Finish • Dark Oak Finish Blades





F589-TCL

Textured Coal Black Finish
Textured Coal Black Blades

SUNDOWNER®

5-Blades, 54” Sweep • 16° Blade Pitch • 6” Downrod • 3-Speed Pull Chain



Location Rating:	Indoor/Outdoor Use - UL Listed for Wet Locations
Motor Type:	AC 188 x 20mm Motor
CFM Range:	High Speed 6,401 • Low Speed 1,747
Light Source :	UL Wet Location Light Kit - K9401L (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	N/A
Special Features:	Stainless Steel Hardware & All Weather Blades

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
4,217	46	92
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F589-WH | White Finish • White Blades



F589-BI/AI | Black Iron with Aged Iron Accents Finish • Black Iron Blades



F589-ORB | Oil Rubbed Bronze Finish • Dark Maple Blades





F532-SI

Smoked Iron Finish
Smoked Iron Blades

SUNSEEKER

5-Blades, 60" Sweep • 14° Blade Pitch • 6" Downrod • 3-Speed Pull Chain



Location Rating:	Indoor/Outdoor Use - UL Listed for Wet Locations
Motor Type:	AC 188 x 25mm Motor
CFM Range:	High Speed 5,747 • Low Speed 1,851
Light Source :	UL Wet Location Light Kit - K9401L (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	N/A
Special Features:	Stainless Steel Hardware & All Weather Blades

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,872	39	98
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

F532-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades



F532-DRF | Driftwood Finish • Driftwood Blades



F532-BNW | Brushed Nickel Wet Finish • Silver Blades





F593L-ORB
Oil Rubbed Bronze Finish
Medium Maple Blades
Tinted Opal Glass

TRADITIONAL CONCEPT™ 44"

3-Blades, 44" Sweep • 14° Blade Pitch • Flush Mount



Location Rating:	Indoor/Outdoor Use - UL Listed for Wet Locations
Motor Type:	AC 153 x 17mm Motor
CFM Range:	High Speed 3,959 • Low Speed 1,500
Light Source :	16W LED
Luminous Output:	786 Delivered Lumens
Color Temperature:	3,000K
Color Rendering Index:	CRI 80
Wall Control System:	Full Function Wall Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
2,682	35	77
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

	WCS212 Wall Control
	• 3 Speed Fan Control in Fwd & Rev • On/Off Plus Full Range Light Dimmer

F593L-WH | White Finish • White Blades • Opal Glass



*Shown with Cap
for Non-Light Use (Included)*



F594L-ORB
 Oil Rubbed Bronze Finish
 Medium Maple Blades
 Tinted Opal Glass

TRADITIONAL CONCEPT™ 52"

3-Blades, 52" Sweep • 14° Blade Pitch • Flush Mount



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - UL Listed for Wet Locations
 AC 172 x 20mm Motor
 High Speed 5,203 • Low Speed 2,116
 16W LED
 478 Delivered Lumens
 3,000K
 CRI 80
 Full Function Wall Control System (Included)
 Cap for Non-Light Use (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,638	40	91
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



WCS212 Wall Control

- 3 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer



F594L-WH | White Finish • White Blades • Opal Glass





F662-CL
Coal Black Finish
Cool Black Wood Blades

VAPOR

3-Blades, 60" Sweep • 14° Blade Pitch • 6" Downrod

DAMP LOCATION

REMOTE CONTROLLED

DC MOTOR

Location Rating:	Indoor/Outdoor Use - UL Listed for Damp Locations
Motor Type:	DC 85 x 28mm Motor
CFM Range:	High Speed 5,900 • Low Speed 3,000
Light Source :	N/A
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	Hand Held Remote Control System (Included)
Special Features:	Constructed with Real Wood

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
5,900	20	295
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F662-WHF | Flat White Finish • Flat White Wood Blades



F662-CL/TK | Coal Black Finish • Toned Koa Wood Blades



A662-SBR | Soft Brass Conversion Kit Available





F870L-ORB

Oil Rubbed Bronze Finish
Seasoned Wood Finish Blades
Etched Lens

WINDMOLEN

12-Blades, 65" Sweep • 24° Blade Pitch • 10" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Special Features:

Indoor/Outdoor Use - ETL Listed for Wet Locations

DC 123 x 30mm Motor

High Speed 8,725 • Low Speed 4,261

40W LED

1,683 Delivered Lumens

3,000K

CRI 90

Hand Held Remote Control System (Included)

Honorable Mention, 2021 Integrated Home Competition

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
6,633	27	244
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		



RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F870L-TCL | Textured Coal Black Finish • Coal Black Ashwood Blades • Etched Lens



F870L-BS | Brushed Steel Finish • Ashwood Blades • Etched Lens



F870L-TW | Textured White Finish • Bleached Ashwood Blades • Etched Lens





F896-52-BNW
 Brushed Nickel Wet Finish
 Silver Blades

XTREME H2O 52"

8-Blades, 52" Sweep • 9° Blade Pitch • 6" Downrod

WET LOCATION

REMOTE CONTROLLED

DC MOTOR

BOND COMPATIBLE

Location Rating:	Indoor/Outdoor Use - ETL Rated for Wet Locations
Motor Type:	DC 123 x 30mm Motor
CFM Range:	High Speed 10,989 • Low Speed 2,000
Light Source :	20W LED Light Kit - K9886L (Sold Separately)
Luminous Output:	N/A
Color Temperature:	N/A
Color Rendering Index:	N/A
Remote Control System:	Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
3,000	32	93
All estimates based on typical use • Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC1000 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F896-52-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades



F896-52-SI | Smoked Iron Finish • Smoked Iron Blades



F896-52-CL | Coal Black Finish • Coal Black Blades



F896-52-WHF | Flat White Finish • Flat White Blades





F896-65-BNW

Brushed Nickel Wet Finish
Silver Blades

XTREME H2O 65"

8-Blades, 65" Sweep • 9° Blade Pitch • 6" Downrod

WET LOCATION

REMOTE CONTROLLED

DC MOTOR

BOND COMPATIBLE

Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - ETL Rated for Wet Locations
DC 123 x 30mm Motor
High Speed 9,036 • Low Speed 3,765
20W LED Light Kit - K9886L (Sold Separately)
N/A
N/A
N/A
Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
6,565	32	205
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day • Your cost depends on rates and use • The higher the airflow, the more air the fan will move.		

RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F896-65-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades



F896-65-SI | Smoked Iron Finish • Smoked Iron Blades



F896-65-CL | Coal Black Finish • Coal Black Blades



*Shown with Optional
LED Light Kit (K9886L-CL)*

F896-65-WHF | Flat White Finish • Flat White Blades





F896-84-BNW

Brushed Nickel Wet Finish
Silver Blades

XTREME H2O 84"

8-Blades, 84" Sweep • 9° Blade Pitch • 6" Downrod



Location Rating:

Motor Type:

CFM Range:

Light Source :

Luminous Output:

Color Temperature:

Color Rendering Index:

Remote Control System:

Indoor/Outdoor Use - ETL Rated for Wet Locations
DC 123 x 30mm Motor
High Speed 10,989 • Low Speed 5,150
20W LED Light Kit - K9886L (Sold Separately)
N/A
N/A
N/A
Hand Held Remote Control System (Included)

Estimated Energy Guide (Excluding Lights)

AIRFLOW (CFM)	ENERGY USE (WATTS)	AIRFLOW EFFICIENCY (CFM Per Watt)
8,252	32	262
All estimates based on typical use - Based on 12 cents per kWh and 6.4 hours use per day - Your cost depends on rates and use - The higher the airflow, the more air the fan will move.		



RC400 Remote Control

- 6 Speed Fan Control in Fwd & Rev
- On/Off Plus Full Range Light Dimmer

F896-84-ORB | Oil Rubbed Bronze Finish • Oil Rubbed Bronze Blades



F896-84-SI | Smoked Iron Finish • Smoked Iron Blades



*Shown with Optional
LED Light Kit (K9886L-SI)*

F896-84-CL | Coal Black Finish • Coal Black Blades



F896-84-WHF | Flat White Finish • Flat White Blades





SPECIFICATIONS & ACCESSORIES



UNIVERSAL LIGHT KITS



K9115L LED

Etched White Glass
26W LED 1647 Lumens
12 1/4"Dia. x 2 1/2"H
Includes Brushed Nickel, Oil
Rubbed Bronze & White Caps
LED Receiver Required*



K9515L-1 LED

Three Light
Frosted White
3-4W LED(Incl.)
12 1/4"Dia. x 2 1/2"H
Includes Brushed Nickel
& White Caps



K9525L-1 LED

Three Light
Frosted White
3-4W LED (Incl.)
12 1/4"Dia. x 2 1/2"H
Includes Brushed Nickel
& White Caps

*For remote control use model number #RCS223L. Must be ordered separately.



AC100	Swirled Glass
AC100-BCW	Belcaro Walnut™
AC100-BS	Brushed Steel
AC100-BWH	Bone White
AC100-DBB	Dark Brushed Bronze
AC100-FB	French Beige
AC100-FPWH	Frosted White
AC100-KA	Kocoa

AC100-ORB	Oil Rubbed Bronze
AC100-PBL	Provencal Blanc
AC100-PI	Patina Iron
AC100-PW	Pewter
AC100-STW/ GOW	Sterling Walnut™/ Golden Walnut
AC100-SWH	Shell White

K9401L LED

Indoor/Outdoor
Wet Location
Opal Glass
9W 3000K
LED Bulb (incl.)
10 1/2"Dia. x 5 1/2"H



K9401L-ORB



K9401L-WH

K9402 LED

One Light
Opal Glass
9W 3000K
LED Bulb (incl.)
7 3/4"Dia. x 8 1/2"H



K9402L-ORB



K9402L-44

* Additional Cap Finishes Available

PLEASE NOTE: All Light Kits include Chain with Decorative Fob. (Not shown)

CUSTOM LED LIGHT KITS

K9873L

LED Light
20W Dimmable LED (Incl.)
7 1/4"Dia. x 1 1/4"H
1,100 Lumens
3,000 Kelvin
CRI 90
Etched Lens

Compatible with the
F873 and F874 Simple Flush
Fans Only



K9873L-CL



K9873L-GRY



K9873L-WHF

K9886L

LED Light
20W Dimmable LED (Incl.)
6 1/2"Dia. x 1 3/4"H
1,430 Lumens
3,000 Kelvin
CRI 90
Etched Lens

Compatible with the
F886 and F896 Xtreme H₂O
Fans Only



K9886L-BNW



K9886L-CL



K9886L-ORB



K9886L-SI



K9886L-WHF

K9787L

LED Light
20W Dimmable LED (Incl.)
5"Dia. x 1 1/2"H
999 Lumens
3,000 Kelvin
CRI 90
Etched Lens

Compatible with the
F786 Simple 44" and
F787 Simple 52" and 65"
Fans Only



K9787L-BNW



K9787L-CL



K9787L-ORB



K9787L-SL



K9787L-WHF



K9787L-SBR

Finish Codes

See finish code reference page (FINCODEPG)

PLEASE NOTE: All Light Kits include Chain with Decorative Fob. (Not shown)

* Additional Cap Finishes Available

MinkaAire.com | 335

CUSTOM LED LIGHTS KITS

K9727L

LED Light
17W LED (Incl.)
6 ¾" Dia. x 5"H
500 Lumens
2,700 Kelvin
CRI 90
Etched Glass

Compatible with the
F727 Rudolph Fans Only

Includes
WC116L
wall control.



K9727L-BN



K9727L-CL



K9727L-DK



K9727L-ORB



K9727L-WHF

K9933L

LED Light
20W Dimmable LED (Incl.)

Etched Lens

Compatible with the
F933 Bowie Fan Only



K9933L

GLASS SHADES



2548

Etched Opal
5 ¾" Dia. x 4 ½"H



2549

Etched Marble
5 ¾" Dia. x 4 ½"H



2565

Etched Seeded
4 ¾" Dia. x 4 ¾"H



4099

4" Opal Glass Shade
8 ½" Dia. x 5 ½"H

UNIVERSAL LIGHT KITS

K35

Three Light
13W Spiral
Medium
Base (Incl.)
2 ¼" Side Shade
7 ¼"Dia. x 3 ½"H



K35L-PW

K35L LED

9W 3000K
LED Bulb (incl.)
2 ¼" Side Shade
7 ¼"Dia. x 3 ½"H



K35L-BNK

K34L LED

9W 3000K
LED Bulb (incl.)
2 ¼" Side Shade
11 ¾"Dia. x 2 ¾"H



K34L-44

K9659L LED

4W 3000K
LED Bulb (incl.)
2 ¼" Side Shade
7 ½"Dia. x 3 ½"H

Compatible with
the F659 Classica
Fans Only



K9659L-DRF

K9614L LED

4W 3000K
LED Bulb (incl.)
2 ¼" Side Shade
8 ½"Dia. x 3 ¼"H

Compatible with
the F614 Timeless
Fans Only



K9614L-BNK



K9614L-DBB

Finish Codes

See finish code reference page (FINCODEPG)

PLEASE NOTE: All Light Kits include Chain with Decorative Fob. (Not shown)

AIRE-CONTROL® SYSTEMS



FULL FUNCTION HAND HELD REMOTE CONTROL

An ultra-thin design exclusive to Minka-Aire®, the remote enables the user with one finger to control all functions of Minka-Aire® ceiling fans.

AireControl® by Minka-Aire® controls all functions: reverse, uplight (where applicable), fan light, speed control, as well as off-on (RCS212 & WCS212)

RCS213, RCS223, WCS213 and WCS223 controls do not include the reverse function.

Included is a holster if you want to wall mount the control for your convenience.



RC400

AireControl® Remote System 32 Bit

- Six Speed Fan Control in Forward and Reverse
- On/Off Plus Full Range Light Dimmer
- Includes One (1) Hand Held Remote Control, Wall Holster
- Operates at Distance of 23' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with WC400 Wall Mount AireControl®

U.S. Patent(s): D533,514; D551,008



RC500

AireControl® Remote System 256 Bit

- Six Speed Fan Control in Forward and Reverse
- On/Off Plus Full Range Light Dimmer
- Includes One (1) Hand Held Remote Control, Wall Holster
- Operates at Distance of 23' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with WC500 Wall Mount AireControl®

U.S. Patent(s): D533,514; D551,008



RC600

AireControl® Remote System 32 Bit

- Six Speed Fan Control in Forward and Reverse
- On/Off Plus Full Range Light Dimmer
- Includes One (1) Hand Held Remote Control, Wall Holster
- Operates at Distance of 23' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with WC600 Wall Mount AireControl®

U.S. Patent(s): D533,514; D551,008

Please Note: 256 Bit remote systems are not compatible with 32 Bit remote systems.

AIRE-CONTROL® SYSTEMS



RC1000 Speed Control

- 1,024 Frequency Combinations
- Six Speed Fan Control in Forward and Reverse
- On/Off Plus Full Range Light Dimmer
- Includes One (1) Hand Held Remote Control, Wall Holster
- Operates at Distance of 23' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with WC1000 Wall Mount AireControl®

U.S. Patent(s): D533,514; D551,008; 8,253,272



RCS212 Full Function Hand Held AireControl® Remote System 256 Bit

- Three Speed Fan Control in Forward and Reverse
- On/Off Plus Full Range Light Dimmer with Independent Up/Downlight Control
- Includes One (1) Hand Held Remote Control, Wall Holster
- Operates at Distance of 20-40' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with WCS212 Wall Mount AireControl®

U.S. Patent(s): D533,514; D551,008; 8,253,272



RCS213 & RCS213-S Hand Held AireControl® Remote System 256 Bit

- Three Speed Fan Control
- On/Off Plus Full Range Light Dimmer
- Includes One (1) Hand Held Remote Control, Wall Holster
- Operates at Distance of 20-40' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with WCS213 Wall AireControl®

U.S. Patent(s): D533,514; D551,008; 8,253,272



RCS223 Hand Held AireControl® Remote System 256 Bit

- Three Speed Fan Control
- On/Off Plus Full Range Light Dimmer
- Includes One (1) Hand Held Remote Control, Wall Holster and Canopy Mounted Receiver
- Operates at Distance of 20-40' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with WCS213 Wall AireControl®

U.S. Patent(s): D533,514; D551,008; 8,253,272



RCS223L Hand Held AireControl® Remote System for LED 256 Bit (Non-Dimming)

- Three Speed Fan Control
- On/Off Light Control Only
- Includes One (1) Hand Held Remote Control, Wall Holster and Canopy Mounted Receiver
- Operates at Distance of 20-40' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with WCS213 Wall AireControl®

U.S. Patent(s): D533,514; D551,008; 8,253,272



WCS212 Full Function AireControl® 256 Bit

- Three Speed Fan Control in Forward and Reverse
- On/Off Plus Full Range Light Dimmer with Independent Up/Downlight Control
- Operates at Distance of 20-40' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with RCS212 Hand Held AireControl®
- Includes Brown, Ivory and White Finish Inner/Outer Plates

U.S. Patent(s): D533,514; 8,253,272

Please Note:

12 Volt Battery (Included) for Hand Held Remotes
256 Bit remote systems are not compatible with 32 Bit remote systems.

AIRE-CONTROL® SYSTEMS



WCS213 & WCS213-S AireControl® 256 Bit

- Three Speed Fan Control
- On/Off Plus Full Range Light Dimmer
- Operates at Distance of 20-40' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with RCS213 Hand Held AireControl®
- Includes Brown, Ivory and White Finish Inner/Outer Plates

U.S. Patent(s): D533,514; 8,253,272



WCS223 AireControl® 256 Bit

- Three Speed Fan Control
- On/Off Plus Full Range Light Dimmer
- Operates at Distance of 20-40' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with RCS213 Hand Held AireControl®
- Includes Brown, Ivory and White Finish Inner/Outer Plates

U.S. Patent(s): D533,514; 8,253,272



WC400 AireControl® 32 Bit

- Six Speed Fan Control in Forward and Reverse
- On/Off Plus Full Range Light Dimmer
- Operates at Distance of 23' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with RC400 Hand Held AireControl®
- Includes Brown, Ivory and White Finish Inner/Outer Plates

U.S. Patent(s): D533,514



WC500 AireControl® 256 Bit

- Six Speed Fan Control in Forward and Reverse
- On/Off Plus Full Range Light Dimmer
- Operates at Distance of 23' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with RC500 Hand Held AireControl®
- Includes Brown, Ivory and White Finish Inner/Outer Plates

U.S. Patent(s): D533,514



WC600 AireControl® 32 Bit

- Six Speed Fan Control in Forward and Reverse
- On/Off Plus Full Range Light Dimmer
- Operates at Distance of 23' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with RC600 Hand Held AireControl®
- Includes Brown, Ivory and White Finish Inner/Outer Plates

U.S. Patent(s): D533,514



WC1000 Speed Control 1024 Bit

- 1,024 Frequency Combinations
- Six Speed Fan Control in Forward and Reverse
- On/Off Plus Full Range Light Dimmer
- Operates at Distance of 23' Distance; Depends on Quality/Materials Used in Construction of Room/Building Fan is Hung In
- Can be Used in Conjunction with RC1000 Wall Mount AireControl®
- Includes Brown, Ivory and White Finish Inner/Outer Plates

U.S. Patent(s): D533,514; 8,253,272

Please Note: 256 Bit remote systems are not compatible with 32 Bit remote systems.

AIRE-CONTROL® SYSTEMS



WC105-WH Speed Control

- Four Speed Fan Control
- 2-Wire Installation



WC106-WH Speed Control

- Four Speed Fan Control
- 3-Wire Installation



WC106L Speed Control

- Four Speed Fan Control
- Full Range Dimmer
- 3-Wire Installation
- LED Application



WC110L Speed Control

- For F510L LED Fans Only
- Four Speed Fan Control
- Full Range Dimmer
- 3-Wire Installation



WC115 Speed Control

- For F624 Fans Only
- Four Speed Fan Control
- 2-Wire Installation



WC116L Speed Control

- For K9727L Light kits (Included in the Light Kit)
- Four Speed Fan Control
- 3-Wire Installation
- Dimming Capable



WC116 Speed Control

- For F727 Fans Only
- Four Speed Fan Control
- 2-Wire Installation



WDC1200 Speed Control


- For DC F553L Fans
- Three Speed Fan Control
- Full Range Dimmer
- 4-Wire Installation



WDC1300 Speed Control


- For F551 and F552L
- Three Speed Fan Control
- Full Range Dimmer
- 3-Wire Installation

BULB REFERENCE



Watts: 10W / 20W
XENON JCX 12V
G4 BI-PIN BASE

Frosted JX4-20 (20W)
Clear JX4C-10 (10W)
JX4C-20 (20W)




Watts: 35W / 50W
XENON JCX 12V
GY6.35 BI-PIN BASE

Frosted JX6-35 (35W)
JX6-50 (50W)



Watts: 25W / 35W / 40W / 60W / 75W
G9 XENON 120V
G9 BASE

Frosted JX9-025 (25W)
JX9-035 (35W)
JX9-040 (40W)
JX9-060 (60W)
JX9-075 (75W)
Clear JX9C-025 (25W)
JX9C-040 (40W)




Watts: 20W / 50W
XENON 120V
DC (BAYONET)

JXB15-20 (20W)
JXB15-50 (50W)




Watts: 75W
XENON 120V
E12 (CANDELABRA) BASE

Frosted JDXF-12-075 (75W)




Watts: 50W / 75W / 100W
MINI-CAN XENON 120V
E11 (CANDELABRA) BASE

Frosted JDX-050 (50W)
JDX-75 (75W)



Watts: 50W / 75W / 100W
MINI-CAN HALOGEN 120V
E11 (CANDELABRA) BASE

Frosted JDC-50 (50W)
JDC-75 (75W)
JDC-100 (100W)
Clear JD-50 (50W)
JD-75 (75W)
JD-100 (100W)




Watts: 50W
JDD XENON 120V
E12 (CANDELABRA) BASE

Frosted JDX2F-050 (50W)
Clear JDX2-050 (50W)



Watts: 100W / 150W
78MM 120V DOUBLE ENDED
HALOGEN (J-TYPE)
R7S BASE

JB-100 (100W)
JB-150 (150W)




Watts: 8W DC / 10W AC / 11W AC / 14W AC
LED MODULE

L-L8-MD590 (8W)
L-AC10-MODULE (10W)
L-AC10-MD770 (11W)
L-AC14-MD950 (14W)




Watts: 50W
PAR16 HALOGEN
E26 (MEDIUM) BASE

PAR16-50 (50W)



Watts: 35W / 50W
HALOGEN MR16 120V
GU10 BASE

JGU-035 (35W)
JGU-50 (50W)



Watts: 20W / 35W / 50W
HALOGEN MR16
GX5.3 BI-PIN BASE

Frosted JMR16-20 (20W 120V)
JMR16-35 (35W 120V)
JMR16-50/120V (50W 120V)
Clear JMR16-C-20 (20W 12V)
JMR16-C-35 (35W 12V)
JMR16-C-50 (50W 12V)



Watts: 13W / 26W
SPIRAL CFL
E26 (MEDIUM) BASE



Watts: 13W / 26W
SPIRAL CFL
GU24 BASE

FLB-13M (13W)
FLB-26M (26W)




Watts: 18W / 26W
SQUAT SPIRAL CFL
GU24 BASE

FLS-18M (18W)
FLS-26M (26W)




Watts: 6W
LED FERRO
E26 (MEDIUM) BASE

L-LB06-FW58 (6W)




Watts: 40W
FERRO
E26 (MEDIUM) BASE

E26-FW1910-40W (40W)




Watts: 40W / 60W / 100W
T10 120V
E26 (MEDIUM) BASE

Frosted JT10-060F (60W)
Clear JT10-040C (40W)
JT10-060C (60W)
JT10-100C (100W)




Watts: 60W
T8 120V
E12 (CANDELABRA) BASE

Clear E12-FW1910-60W (60W)



Watts: 27W
FULL 24 CFL
GX10q-4 BASE

JT4-27 (27W)




Watts: 27W
CFL
GX10q-4 BASE

JT2-27 (27W)



Watts: 13W
4-PIN (PL-C)
G24q-1 BASE

FLT-13Q (13W)



Watts: 32W
FC12T9 T9 CIRCULINE
G10Q

FLC-22 (22W)
FLC-32 (32W)
FLC-40 (40W)



Watts: 8W / 13W
FLUORESCENT
T5 G13 BI-PIN BASE

Ballast: BLST08-T5
JTS-8
JTS-13



Watts: 7W
C7 CFL
E12 (CANDELABRA) BASE

FLB-07C (7W)



Watts: 75W
MR16
E17 BASE

JDR-75 (75W)



Watts: 4W
LED B10.5
E12 (CANDELABRA) BASE

L-LB04C-E12 (4W)




Watts: 40W / 60W
B10.5
E12 (CANDELABRA) BASE

E12 (CANDELABRA) BASE



Watts: 15W
C7
E12 (CANDELABRA) BASE

ECC-15 (15W)




Watts: 60W
BR30
E26 (MEDIUM) BASE

K-L25A19D-9W
E26 (MEDIUM) BASE



Watts: 40W / 60W
A15
E26 (MEDIUM) BASE



Watts: 40W / 60W / 75W / 100W
A19




Watts: 150W
A21 (3-WAY)
E26 (MEDIUM) BASE



Watts: 25W / 40W / 60W
G16 1/2
E12 (CANDELABRA) BASE




Watts: 60W / 100W
G25
E26 (MEDIUM) BASE



Watts: 60W / 100W
G30
E26 (MEDIUM) BASE



Watts: 40W / 60W / 100W
G40
E26 (MEDIUM) BASE



Watts: 9W
K-L25A19D-9W
E26 (MEDIUM) BASE

FAN CONTROL SYSTEMS COMPATIBILITY CHART

FAN MODEL	FAN NAME	RCS212	RCS213	RCS223	WC105-WH	WC106-WH	WC106L	WCS212	WCS213	WCS223
F307	ANYWHERE									
F402L	GYRO™ WET	•						INCL.		
F410L	SLANT	RC400 INCL., COMPATIBLE WITH WC400								
F448L	CONTRACTOR UNI-PACK			•		•				•
F465L	CONCEPT™ IV	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F467L	CONCEPT™ III	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F468L	HOURLASS	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F474L	CONCEPT™ II WET 52"	•						INCL.		
F476L	CONCEPT™ I WET 52"	•						INCL.		
F477L	CONCEPT™ I WET 58"	•						INCL.		
F502L	TRADITIONAL GYRO™	•						INCL.		
F510L	SPACESAVER	WALL CONTROL (INCLUDED) WC110L								
F513	NEW ERA	INCL.						•		
F517L	CONCEPT™ I 52"	INCL.						•		
F518L	CONCEPT™ II 44"	INCL.						•		
F519L	CONCEPT™ II 52"	INCL.						•		
F521L	ALUMA						INCL.			
F522L	MOJO			•		•				•
F523L	ALUMA WET		INCL.						•	
F524	ROTO			•	INCL.					•
F532	SUNSEEKER				•	•				
F534L	LUN-AIRE	COMPATIBLE WITH WCS213 & RCS213 MUST USE RECEIVER L001041000S								
F535L	ROTO LED		RCS213-S INCL.						WCS213-S	
F539	GREAT ROOM TRADITIONAL	•						INCL.		
F543L	SWEPT	RC400 INCL., COMPATIBLE WITH WC400								
F544L	CALAIS™		INCL.			•			•	
F546	CONTRACTOR 42"			•	•	•				•

• = Compatibility

PLEASE NOTE: 256 Bit remote systems are not compatible with 32 Bit remote systems.

- 256 Bit systems have a Green LED and Green receiver boxes.
- 32 Bit systems have a Red LED and Black receiver boxes.
- 1024 Bit systems have a Red LED and Black receiver boxes.

FAN CONTROL SYSTEMS COMPATIBILITY CHART

FAN MODEL	FAN NAME	RCS212	RCS213	RCS223	WC105-WH	WC106-WH	WC106L	WCS212	WCS213	WCS223
F547	CONTRACTOR 52"			•	•	•				•
F551	WATT	3 SPEED DC PULL CHAIN, COMPATIBLE WITH WDC 1300								
F552L	WATT II	3 SPEED DC PULL CHAIN, COMPATIBLE WITH WDC 1300								
F553L	MINUTE	3 SPEED DC PULL CHAIN, COMPATIBLE WITH WDC 1200								
F556L	CONTRACTOR LED		RCS213-S INCL.						WCS213-S	
F562	SUPRA® 32"			•	•	•				•
F563	SUPRA® 44"			•	•	•				•
F565	MESA™ 52"				•	•				
F566	MESA™ 42"				•	•				
F568	SUPRA® 52"			•	•	•				•
F569L	SUPRA® 52" LED		INCL.	COMPATIBLE WITH WC116L						
F571	SUNDANCE™ 52"				•	•				
F572	SUNDANCE™ 42"				•	•				
F581L	GAUGUIN™	•						INCL.		
F582L	RAINMAN™		•			•			INCL.	
F589	SUNDOWNER®				•	•				
F593L	TRADITIONAL CONCEPT™ 44"	•						INCL.		
F594L	TRADITIONAL CONCEPT™ 52"	•						INCL.		
F602L	GYRO™	•						INCL.		
F614	TIMELESS			•	•	•				•
F617L	RAPTOR	RC600 (INCLUDED), COMPATIBLE WITH WC600								
F619L	STOUT		RCS213-S INCL.						WCS213-S	
F623L	ORB		RCS213-S INCL.						WCS213-S	
F624	ROTO XL	WALL CONTROL (INCLUDED) WC115								
F625L	SKINNIE 44"	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F626L	SKINNIE 56"	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F631L	AUDREY		INCL.						•	
F633L	GORDON		INCL.						•	
F636L	SWITCH 3-BLADES	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								

• = Compatibility

PLEASE NOTE: 256 Bit remote systems are not compatible with 32 Bit remote systems.

- 256 Bit systems have a Green LED and Green receiver boxes.
- 32 Bit systems have a Red LED and Black receiver boxes.
- 1024 Bit systems have a Red LED and Black receiver boxes.

FAN CONTROL SYSTEMS COMPATIBILITY CHART

FAN MODEL	FAN NAME	RCS212	RCS213	RCS223	WC105-WH	WC106-WH	WC106L	WCS212	WCS213	WCS223
F638L	SWITCH 5-BLADES	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F644L	ROTO FLUSH		RCS213-S INCL.						WCS213-S	
F656L	CONTRACTOR UNI-PACK LED	COMPATIBLE WITH WCS213 & RCS213 MUST USE RECEIVER L001021500S								
F659	CLASSICA			•	•	•				•
F662	VAPOR	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F663	AVTUR	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F668L	BRIDGE	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F670L	AIRETOR III	3-SPEED PULL CHAIN								
F671L	PURE	WC116L (INCLUDED)								
F673L	AIRETOR	3-SPEED PULL CHAIN								
F676L	VITAL		•	3-SPEED PULL CHAIN					•	
F678L	TWIST	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F684L	CLEAN	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F688	KOLA			•	•	•				•
F689	KOLA XL	INCL.						•		
F690L	ESPACE		INCL.						•	
F692L	VEER		RCS213-S INCL.						WCS213-S	
F695	KAFÉ			•	•	•				•
F696	KAFÉ XL	INCL.						•		
F702L	VOLTERRA™		•			•			INCL.	
F705L	NAPOLI™	•						INCL.		
F714L	CURL	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F715DL	NAPOLI™ II	RC500 (INCLUDED), COMPATIBLE WITH WC500								
F717L	KELVYN™		RCS213-S INCL.						WCS213-S	
F727	RUDOLPH	WALL CONTROL (INCLUDED) WC116, COMPATIBLE WITH RCS223 & WCS223								
F728	RUDOLPH WET	RC600 (INCLUDED)								
F729	STEAL				INCL.					
F734L	STRATA		INCL.							

• = Compatibility

PLEASE NOTE: 256 Bit remote systems are not compatible with 32 Bit remote systems.

- 256 Bit systems have a Green LED and Green receiver boxes.
- 32 Bit systems have a Red LED and Black receiver boxes.
- 1024 Bit systems have a Red LED and Black receiver boxes.

FAN CONTROL SYSTEMS COMPATIBILITY CHART

FAN MODEL	FAN NAME	RCS212	RCS213	RCS223	WC105-WH	WC106-WH	WC106L	WCS212	WCS213	WCS223
F742L	MOLINO	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F745	SABOT	RC600 (INCLUDED), COMPATIBLE WITH WC600								
F747L	TIMBER 68"	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F749L	SKYHAWK	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F753	JAVA		INCL.							
F753L	JAVA LED		INCL.							
F754L	JAVA XTREME 84"	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F756L	FUTURE	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F759L	CLASSICA GALLERY EDITION		INCL.						•	
F762L	PIERCE 65"	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F763L	PIERCE 84"	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F765L	TRANSONIC		RCS213-S INCL.						WCS213-S	
F767L	SKYMASTER	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F771L	ELLIPSE	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F774L	PIKE	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F781L	CHUBBY	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F782L	CHUBBY II	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F786	SIMPLE 44"	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F787	SIMPLE 52"	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F788L	DREAM STAR	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F789	SIMPLE 65"	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F796L	FALCO		INCL.						•	
F797L	FALCO FLUSH		INCL.						•	
F802L	VINTAGE GYRO™	•						INCL.		
F803DL	ARTEMIS™	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F828	SYMBIO	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F833	KEWL			•	INCL.					•
F839L	AIREWAVE	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								

• = Compatibility

PLEASE NOTE: 256 Bit remote systems are not compatible with 32 Bit remote systems.

- 256 Bit systems have a Green LED and Green receiver boxes.
- 32 Bit systems have a Red LED and Black receiver boxes.
- 1024 Bit systems have a Red LED and Black receiver boxes.

FAN CONTROL SYSTEMS COMPATIBILITY CHART

FAN MODEL	FAN NAME	RCS212	RCS213	RCS223	WC105-WH	WC106-WH	WC106L	WCS212	WCS213	WCS223
F843	WAVE 52"		INCL.						•	
F844	LIGHT WAVE 52"		RCS213-S INCL.						WCS213-S	
F845	LIGHT WAVE 44"		RCS213-S INCL.						WCS213-S	
F847L	TIMBER 84"	RC600 (INCLUDED), COMPATIBLE WITH WC600								
F848	LIGHT WAVE 65"		RCS213-S INCL.						WCS213-S	
F853	AVIATION	RC500 (INCLUDED), COMPATIBLE WITH WC500								
F853L	AVIATION LED	RC500 (INCLUDED), COMPATIBLE WITH WC500								
F854	WAVE 44"		INCL.						•	
F855	WAVE 65"		INCL.						•	
F862L	PINUP	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F864L	BARN	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F865L	BARN H2O	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F866L	DECO	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F868L	SLEEK	RC600 (INCLUDED), COMPATIBLE WITH WC600								
F870	WINDMOLEN	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F873	SIMPLE FLUSH 52"	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F874	SIMPLE FLUSH 60"	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F887	XTREME 96"	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F888L	SLIPSTREAM	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F896-65	XTREME H ₂ O	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F896-84	XTREME H ₂ O	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F897L	CAIRO	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F900L	CRISTAFANO™	•						INCL.		
F903L	ARTEMIS™ IV	RC400 (INCLUDED), COMPATIBLE WITH WC400								
F905L	ARTEMIS™ XL5	RC600 (INCLUDED), COMPATIBLE WITH WC600								
F933	BOWIE	RC1000 (INCLUDED), COMPATIBLE WITH WC1000								
F1000	DYNO		RCS213-S INCL.						WCS213-S	
F1001	DYNO XL	RC600 (INCLUDED), COMPATIBLE WITH WC600								

• = Compatibility

PLEASE NOTE: 256 Bit remote systems are not compatible with 32 Bit remote systems.

- 256 Bit systems have a Green LED and Green receiver boxes.
- 32 Bit systems have a Red LED and Black receiver boxes.
- 1024 Bit systems have a Red LED and Black receiver boxes.

HANGING SYSTEMS




FINISH	ABDD	BCW	BG	BI	BK	BN	BNK	BNW	BRS	BS	BWH	CL	CSBR	DB	DBB	DM	DRB	DRFF	FB	GI	GL	GM	GRY	HBZ	HT	KA	LBR
DR5 SERIES DOWNROD ARE 3/4" I.D.																											
DR500-COUPLER	•**	•	•	•	•	•	•	•	—	•	•	•	•	•	•	—	•	•	•	•	•	•	—	•	•	•	•
DR503	•	•	•	•	•	•	•	•	—	•	•	•	—	—	•	—	•	•	•	•	•	•	—	•	•	•	—
DR504	•	•	—	—	—	•	—	—	—	—	—	—	—	—	—	—	•	—	—	—	•	—	—	—	—	—	—
DR506	—	—	—	—	—	•	•	—	—	•	—	•	—	—	—	—	—	—	—	—	—	—	•	—	—	—	—
DR510	—	—	—	—	—	•	•	•	—	•	—	•	—	—	—	•	—	—	—	—	—	—	—	•	—	—	—
DR512	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DR518	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DR524	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DR536	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DR548	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DR560	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DR572	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
MINKA-AIRE® 45° SLOPE CEILING ADAPTER KITS (SCA)																											
* A245 3/4" I.D.	•**	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
A180	—	•	—	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	—	•	•	•	•	•
*** A581	—	—	•	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Minka-Aire® offers a full selection of downrods in 59 finishes and 8 lengths to complement any Minka-Aire® ceiling fan.

* A245 3/4" I.D. is also available in PR (Primer) finish. ** For F524-ABD, only. *** For F581, only.

-SM fan finish uses WH/44, while -MBM fan finish uses CL finish.

HANGING SYSTEMS

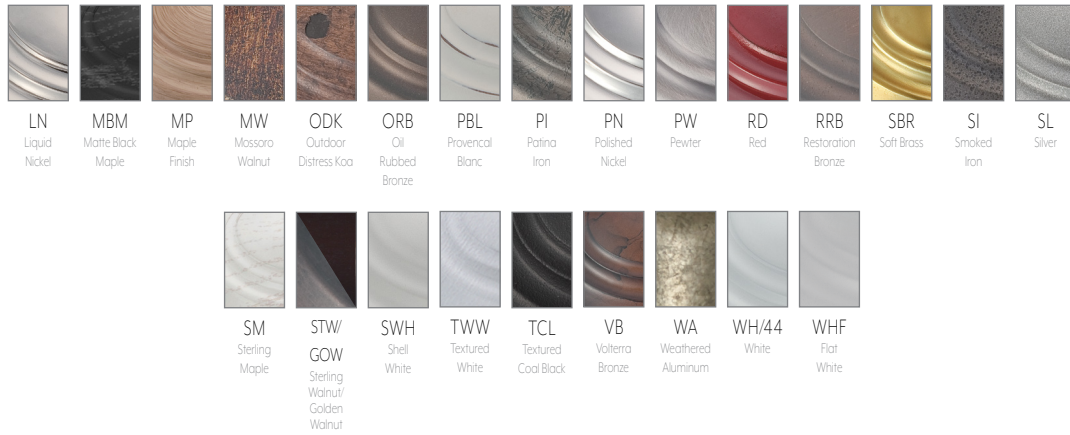

FINISH	LN	MBM	MP	MW	ODK	ORB	PBL	PI	PN	PW	RD	RRB	SBR	SI	SL	SM	STW/GOW	SWH	TCL	TWW	VB	WA	WH/44	WHF
DR5 SERIES DOWNROD ARE 3/4" I.D.																								
DR500-COUPLER	•	–	•	•	•	•	•	•	•	•	•	•	•	•	•	–	•	•	•	•	•	•	•	•
DR503	•	–	•	•	•	•	•	•	•	•	•	•	–	•	•	–	•	•	–	–	•	–	•	•
DR504	–	–	–	–	–	•	–	–	•	–	–	•	–	–	•	–	–	–	–	•	–	•	–	•
DR506	–	–	–	–	•	•	–	–	•	–	–	–	–	–	–	–	–	–	–	–	–	•	•	•
DR510	–	•	–	–	–	•	–	–	•	–	–	–	–	–	•	–	–	•	•	–	•	–	–	–
DR512	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DR518	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DR524	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DR536	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DR548	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DR560	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
DR572	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
MINKA-AIRE® 45° SLOPE CEILING ADAPTER KITS (SCA)																								
* A245 3/4" I.D.	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
A180	•	•	•	•	•	•	•	•	•	•	•	–	•	•	–	•	•	•	•	–	–	•	•	•
*** A581	–	–	–	–	–	•	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	•

All component parts and hardware supplied with your Minka-Aire® ceiling fan have been designed and engineered to assure proper and safe installation of your new ceiling fan. Substituting parts or hardware, such as, but not limited to the hanger ball and the hanger bracket, not supplied with your ceiling fan by Minka-Aire®, will void the Minka-Aire® Warranty.

HANGING SYSTEMS

Low Ceiling
Adapter
A180



Low Ceiling
Adapter
A581

For use on:
F581



A581-BG



A581-ORB



A581-WHF

Soft Brass
Conversion Kit
A662-SBR

For use on:
F662



HANGING SYSTEMS



A245-BN ($\frac{3}{4}$ " I.D.) | Slope Ceiling Adapter Kit (SCA)
U.S. Patent(s): 7,510,160


Minka-Aire® 45° Slope Ceiling Adapter Kit (SCA)

The Minka-Aire® SCA Kit was designed to meet the needs of the home building industry as demand increases for higher, more steeply angled ceilings. The Minka-Aire® A245 SCA is used with a $\frac{3}{4}$ " I.D. DR5 Series Downrod.

The kit includes the mounting bracket, the angled ball assembly, and locking pin. For fans that weigh in excess of 35 lbs, simply use the hanging bracket that comes with the fan in the box (75 lbs rating standard) and the kit's angled ball assembly and locking pin.

When ordering the SCA, specify the finish to match your needs.

Sloped Ceiling Application with standard hanging systems for slopes up to a maximum of 21°

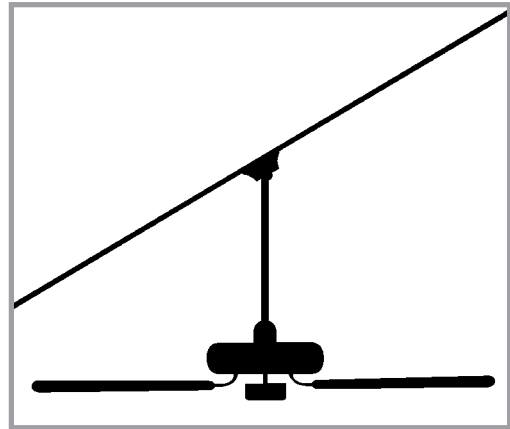

Sloped Ceiling Installation

Minka-Aire® ceiling fans equipped with universal hanging systems may be hung from standard or vaulted ceilings up to 21° pitch.

Hand-painted finishes and components made from natural material may reflect variations in color and texture. These are not imperfections and enhance the unique appearance of each and every Minka-Aire® fixture. Specifications are subject to change at any time.

FINISHES



AB
Antique Brass



ABD/ABDD
Brushed Aluminum



BC
Brushed Carbon



BCW
Belcaro Walnut™



BG
Bahama Beige™



BI/AI
Black Iron/Aged Iron
Accents



BK
Black



BN
Brushed Nickel
(Plated)



BNK
Burnished Nickel



BNW
Brushed Nickel Wet
(Plated)



BRS
Brilliant Silver



BS
Brushed Steel



BWH
Bone White



CL
Coal Black



CSBR
Champagne Soft Brass



DB
Dark Bronze



DBB
Dark Brushed Bronze



DK/ODK
Distressed Koa



DM
Dark Maple



DRB
Dark Restoration Bronze™



DRFF
Driftwood



FB
French Beige



GI
Grey Iron



GL
Galvanized



GM
Gun Metal



GRY
Grey



HBZ
Heirloom Bronze



HT
Heritage™



KA
Kocoa




LBR
Legacy Brass

Hand-painted finishes and components made from natural material may reflect variations in color and texture. These are not imperfections and enhance the unique appearance of each and every Minka-Aire® fixture. Specifications are subject to change at any time.

FINISHES



LN
Liquid Nickel
(Plated)



MBM
Matte Black Maple



MP
Maple



MW
Mossoro Walnut™



ORB
Oil Rubbed Bronze



PBL
Provencal Blanc



PI
Patina Iron



PN
Polished Nickel
(Plated)



PW
Pewter



RD
Red



RB
Restoration Bronze™



SBR
Soft Brass



SI
Smoked Iron



SL
Silver



SM
Sterling Maple



STW/GOW
Sterling Walnut™/
Golden Walnut



SWH
Shell White



TCL
Textured Coal
Black



TB
Toned Brass
(Plated)



TWW
Textured White



VB
Volterra Bronze™



WH/044
White



WHF
Flat White

Hand-painted finishes and components made from natural material may reflect variations in color and texture. These are not imperfections and enhance the unique appearance of each and every Minka-Aire® fixture. Specifications are subject to change at any time.

AIRFLOW CFM

Estimated CFM

MODEL NUMBER	PAGE	FAN NAME	HIGH SPEED	LOW SPEED
F307	242	Anywhere	1,122	605
F402L	269	Gyro™ Wet	3,474	1,954
F410L	180	Slant	3,859	730
F467L	258	Concept™ III	6,056	1,637
F468L	30	Hourglass	4,744	1,580
F465L	260	Concept™ IV	6,249	1,668
F474L	256	Concept™ II Wet	5,333	2,467
F476L	252	Concept™ I Wet 52"	5,389	3,262
F477L	254	Concept™ I Wet 58"	5,315	2,741
F502L	210	Traditional Gyro™	3,088	1,773
F510L	184	Spacesaver	2,016	664
F513	154	New Era	4,801	1,754
F517L	78	Concept™ I	5,236	2,087
F518L	80	Concept™ II 44"	3,656	1,465
F519L	82	Concept™ II 52"	5,423	1,874
F521L	50	Aluma	4,237	1,400
F522L	150	Mojo	4,168	2,055
F523L	240	Aluma Wet	3,864	1,861
F524	164	Roto	4,422	1,553
F532	316	Sunseeker	5,657	1,849
F534L	142	Lun-Aire	5,198	2,176
F535L	168	Roto LED	4,422	1,553
F539	121	Great Room Traditional	10,659	3,723
F543L	198	Swept	6,896	2,670
F544L	72	Calais™	3,956	1,345
F551	224	Watt	6,068	2,525
F552L	226	Watt II	6,028	2,513
F553L	148	Minute	5,029	1,746
F562	190	Supra® 32"	2,944	917
F563	192	Supra® 44"	5,064	1,257
F565	146	Mesa™ 52"	3,709	1,253
F566	144	Mesa™ 42"	2,780	1,341
F568	194	Supra® 52"	4,907	1,362

AIRFLOW CFM

Estimated CFM

MODEL NUMBER	PAGE	FAN NAME	HIGH SPEED	LOW SPEED
F569L	196	Supra® 52" LED	5,841	1,372
F571	312	Sundance™ 52"	5,832	1,808
F572	310	Sundance™ 42"	3,342	1,239
F581L	266	Gauguin™	5,201	2,522
F582L	278	Rainman™	4,824	1,988
F589	314	Sundowner®	6,374	1,773
F594L	320	Traditional Concept™ 52"	5,092	1,818
F602L	122	Gyro™	4,709	3,335
F614	206	Timeless	4,444	1,920
F617L	162	Raptor	6,959	2,088
F619L	188	Stout	4,602	1,793
F623L	156	Orb	4,985	2,257
F624	280	Roto XL	6,576	2,637
F625L	300	Skinnie 44"	6,000	3,000
F626L	250	Skinnie 56"	8,037	3,069
F631L	60	Audrey™	1,143	731
F633L	120	Gordon™	1,443	1,057
F636L	38	Switch 3-Blades	6,686	2,462
F638L	40	Switch 5-Blades	6,859	2,956
F644L	166	Roto Flush	4,078	2,208
F659	74	Classica	4,037	2,226
F662	322	Vapor	5,900	3,000
F663	244	Avtur	5,400	2,000
F668L	24	Bridge	6,952	2,383
F670L	46	Airetor III	4,495	1,988
F671L	160	Pure	3,891	1,577
F673L	44	Airetor	4,762	1,946
F675L	284	Seacrest	5,752	1,827
F676L	220	Vital	3,278	1,354
F678L	214	Twist	5,330	1,804
F681L	268	Groton	5,675	2,000
F684L	76	Clean	10,340	4,039
F688	132	Kola	4,901	1,401

AIRFLOW CFM

Estimated CFM

MODEL NUMBER	PAGE	FAN NAME	HIGH SPEED	LOW SPEED
F689	134	Kola XL	6,497	1,608
F690L	116	Espace	5,075	1,744
F692L	216	Veer	5,000	2,000
F695	124	Kafé	4,766	1,213
F696	126	Kafé XL	6,305	1,457
F702L	222	Volterra™	5,134	1,974
F705	152	Napoli™	7,608	2,895
F714L	102	Curl	7,411	1,487
F715DL	153	Napoli™ II	6,839	2,881
F717L	128	Kelvyn™	4,603	1,733
F727	170	Rudolph	5,757	1,554
F728	282	Rudolph Wet	5,800	3,000
F729	186	Steal	6,093	1,498
F734L	308	Strata	4,648	1,925
F742L	276	Molino	7,166	2,772
F745	174	Sabot	4,941	1,344
F747L	202	Timber 68"	8,341	3,834
F749L	176	Skyhawk	7,284	2,421
F753	270	Java	5,314	2,751
F753L	272	Java LED	5,771	2,834
F754L	286	Java Xtreme	8,388	4,177
F756L	274	Future	6,500	2,000
F759L	73	Classica - Gallery Edition	4,878	1,892
F762L	32	Pierce 65"	7,499	2,573
F763L	34	Pierce 84"	8,106	4,633
F765L	212	Transonic	5,810	2,500
F767L	178	Skymaster	6,500	3,200
F771L	114	Ellipse	5,854	3,165
F774L	36	Pike	5,499	2,033
F781L	248	Chubby	6,391	2,733
F782L	250	Chubby II	6,431	2,656
F786	286	Simple 44"	5,289	1,626

AIRFLOW CFM

Estimated CFM

MODEL NUMBER	PAGE	FAN NAME	HIGH SPEED	LOW SPEED
F787	290	Simple 52"	6,231	2,009
F788L	104	Dream Star	5,666	1,723
F789	294	Simple 65"	5,289	1,626
F796L	118	Falco	5,000	3,000
F797L	28	Falco Flush	4,096	1,893
F802L	218	Vintage Gyro™	3,255	2,063
F803DL	52	Artemis™	7,157	2,295
F828	200	Symbio	6,117	1,693
F833	130	Kewl	4,981	1,499
F839L	48	Airewave	6,500	3,200
F843	230	Wave 52"	4,466	1,674
F844	138	Light Wave 52"	4,453	1,497
F845	136	Light Wave 44"	3,673	1,599
F847L	204	Timber 84"	8,341	3,834
F848	140	Light Wave 65"	5,718	1,280
F853	62	Aviation	5,093	2,127
F853L	66	Aviation LED	5,093	2,127
F854	228	Wave 44"	3,657	1,628
F855	232	Wave 65"	5,713	1,871
F862L	158	Pinup	6,573	2,628
F864L	68	Barn	9,155	3,712
F865L	246	Barn H2O	12,402	4,550
F866L	262	Deco	7,978	3,980
F868L	182	Sleek	6,006	1,715
F870L	324	Windmolen	8,725	4,261
F873	296	Simple Flush 52"	5,500	2,000
F874	298	Simple Flush 60"	6,000	2,200
F887-72	234	Xtreme 72"	10,942	4,673
F887-96	236	Xtreme 96"	13,080	9,152
F888L	304	Slipstream	8,243	3,918
F896-52	326	Xtreme H2O 52"	10,989	2,000
F896-65	328	Xtreme H2O 65"	9,036	3,765

AIRFLOW CFM

Estimated CFM

MODEL NUMBER	PAGE	FAN NAME	HIGH SPEED	LOW SPEED
F896-84	330	Xtreme H2O 84"	10,989	5,150
F897L	26	Cairo	7,609	3,315
F900L	100	Cristafano™	7,644	2,897
F903L	56	Artemis™ IV	8,129	3,264
F905L	58	Artemis™ XL5	6,076	3,396
F933	70	Bowie	5,000	2,000
F1000	106	Dyno	4,509	1,520
F1001	110	Dyno XL	5,987	1,807



FAN SPECIFICATIONS

		Blade Sweep	No of Blades	Blade Pitch	Motor Size	RPM (Hi/Low)	Warranty	Light Kit	Downrod ¾" ID	Lead Wire	Dimension A	Dimension B	Hanging Weight (LBS)
F307	Anywhere	15"	3	23°	82 x 25	985/491	Limited Lifetime	N/A	6"	118"	N/A	N/A	20
F402L	Gyro™ Wet	42"	6	20°	82 x 25	1350/720	Limited Lifetime	Integrated	6"	80"	19½"	17¾"	30
F410L	Slant	36"	3	20°	DC 125 x 20	300/150	Limited Lifetime	Integrated	6"	80"	15"	10½"	15
F465L	Concept™ IV	54"	3	14°	DC 153 x 15	150/35	Limited Lifetime	Integrated	6"	80"	13½"	10¼"	18
F467L	Concept™ III	54"	3	14°	DC 153 x 15	150/35	Limited Lifetime	Integrated	N/A	12"	12¼"	9¼"	18
F468L	Hourglass	58"	3	16°	DC 108 x 20	150/50	Limited Lifetime	Integrated	6"	80"	12¾"	8"	13
F474L	Concept™ II Wet 52"	52"	3	14°	188 x 20	170/92	Limited Lifetime	Integrated	N/A	8"	12"	8½"	26
F476L	Concept™ I Wet 52"	52"	3	14°	188 x 20	168/93	Limited Lifetime	Integrated	6"	80"	20½"	17"	25
F477L	Concept™ I Wet 58"	58"	3	14°	188 x 22	158/68	Limited Lifetime	Integrated	6"	80"	18¼"	14¼"	27
F502L	Traditional Gyro™	42"	6	20°	80 x 25	1350/720	Limited Lifetime	Integrated	4½" & 12"	80"	17"	16½"	40
F510L	Spacesaver	26"	3	14°	153 x 12	392/170	Limited Lifetime	Integrated	N/A	8"	11"	7¼"	12
F513	New Era	52"	4	14°	172 x 16	199/67	Limited Lifetime	Adaptable	6"	80"	15½"	12¾"	18
F516L	Concept™ I 44"	44"	3	14°	153 x 15	189/91	Limited Lifetime	Integrated	6"	80"	17½"	14¼"	22
F517L	Concept™ I 52"	52"	3	14°	172 x 20	183/70	Limited Lifetime	Integrated	6"	80"	17½"	14¼"	25
F518L	Concept™ II 44"	44"	3	14°	153 x 15	181/79	Limited Lifetime	Integrated	N/A	8"	11½"	8¾"	24
F519L	Concept™ II 52"	52"	3	14°	172 x 20	172/66	Limited Lifetime	Integrated	N/A	8"	11½"	8¾"	27
F521L	Aluma	52"	4	12°	153 x 15	187/100	Limited Lifetime	Integrated	6"	80"	15¾"	12¼"	17
F522L	Mojo	52"	5	12°	153 x 15	162/60	Limited Lifetime	Included	6"	80"	17"	11½"	18
F523L	Aluma Wet	52"	4	12°	153 x 20	166/73	Limited Lifetime	Integrated	6"	80"	16½"	13¾"	19
F524	Roto	52"	3	22°	153 x 15	210/112	Limited Lifetime	N/A	6"	80"	11¾"	9½"	11
F532	Sunseeker	60"	5	14°	188 x 25	135/50	Limited Lifetime	Integrated	6"	80"	16½"	14¾"	28
F534L	Lun-Aire	54"	5	12°	172 x 17	150/70	Limited Lifetime	Integrated	6"	80"	15¼"	10½"	25
F535L	Roto LED	52"	3	22°	153 X 15	210/112	Limited Lifetime	Integrated	6"	80"	11½"	13"	12
F539	Great Room Traditional	72"	5	14°	212 x 25	126/45	Limited Lifetime	Adaptable	6"	80"	15¼"	13"	35
F543L	Swept	56"	4	26°	DC 123 x 30	191/51	Limited Lifetime	Integrated	6"	80"	14½"	12"	14
F544L	Calais™	52"	5	14°	172 x 17	165/62	Limited Lifetime	Integrated	N/A	8"	12"	7½"	27
F551	Watt	60"	5	13°	125 x 30	170/60	Limited Lifetime	Adaptable	6"	80"	16"	13"	15
F552L	Watt II	60"	5	13°	DC 125 x 30	170/60	Limited Lifetime	Integrated	6"	80"	20½"	13"	20
F553L	Minute	52"	5	12°	DC 145 x 18	183/69	Limited Lifetime	Adaptable	6"	80"	18"	13 ½"	25
F562	Supra® 32"	32"	6	22°	153 x 16	267/93	Limited Lifetime	Adaptable	6"	80"	14¾"	13"	15
F563	Supra® 44"	44"	5	14°	188 x 15	243/77	Limited Lifetime	Adaptable	6"	80"	14½"	13¼"	19
F563	Supra® 44" -SP	44"	5	14°	188 x 15	243/77	Limited Lifetime	Included	6"	80"	27½"	13¼"	22
F565	Mesa™ 52"	52"	5	12°	153 x 14	176/65	Limited Lifetime	Adaptable	N/A	8"	8¾"	6½"	13
F566	Mesa™ 42"	42"	5	12°	153 x 10	211/92	Limited Lifetime	Adaptable	N/A	8"	7¾"	5¾"	11
F568	Supra® 52"	52"	5	14°	188 x 15	179/58	Limited Lifetime	Adaptable	6"	80"	15¼"	13¼"	20
F569	Supra® 52" LED	52"	5	14°	188 x 15	168/53	Limited Lifetime	Included	6"	80"	19½"	13¼"	24
F571	Sundance™ 52"	52"	5	12°	153 x 15	182/63	Limited Lifetime	Adaptable	6"	80"	14½"	13½"	16
F572	Sundance™ 42"	42"	5	12°	153 x 10	233/103	Limited Lifetime	Adaptable	6"	80"	14¾"	12½"	13

Minka-Aire® ceiling fans are warranted to be free from defects in material and workmanship only if purchased from an authorized Minka-Aire® distributor:

Fan motor - Limited Lifetime Warranty to original purchaser with proof of purchase as long as fan remains in its original installation location and is installed using only the original hardware provided (including hanger bracket). All other parts and controls - warranted to original purchaser with proof of purchase for one (1) year from date of purchase.

FAN SPECIFICATIONS

		Blade Sweep	No of Blades	Blade Pitch	Motor Size	RPM (Hi/Low)	Warranty	Light Kit	Downrod ¾" ID	Lead Wire	Dimension A	Dimension B	Hanging Weight (LBS)
F581L	Gauguin™	52"	4	14°	188 x 20	148/76	Limited Lifetime	Integrated	6"	80"	17½"	18¼"	25
F582L	Rainman™	54"	5	14°	172 x 20	145/70	Limited Lifetime	Integrated	6"	80"	23¾"	13¼"	28
F589	Sundowner®	54"	5	16°	188 x 20	185/51	Limited Lifetime	Adaptable	6"	80"	15"	13"	28
F593L	Traditional Concept™ 44"	44"	3	14°	153 x 17	221/105	Limited Lifetime	Integrated	N/A	8"	11"	7½"	19
F594L	Traditional Concept™ 52"	52"	3	14°	172 x 20	178/60	Limited Lifetime	Integrated	N/A	8"	11"	7½"	23
F602L	Gyro™	42"	6	20°	82 x 25	1350/720	Limited Lifetime	Integrated	6"	80"	16¼"	18¼"	31
F614	Timeless	54"	5	14°	188 x 15	163/58	Limited Lifetime	K9614	6"	80"	16½"	14¼"	21
F617L	Raptor	60"	5	14°	DC 172 x 12	150/60	Limited Lifetime	Integrated	6"	80"	13¾"	11"	29
F619L	Stout	54"	5	12°	153 x 17	153/67	Limited Lifetime	Integrated	6"	80"	15½"	12½"	15
F623L	Orb	54"	4	14°	153 x 17	142/65	Limited Lifetime	Included	6"	80"	16½"	10¼"	20
F624	Roto XL	62"	3	20°	172 x 16	188/96	Limited Lifetime	N/A	6"	80"	12¾"	11¾"	14
F625L	Skinnee 44"	44"	3	18°	DC 123x15	186/58	Limited Lifetime	Integrated	6"	80"			9
F626L	Skinnee	56"	3	18°	DC 123 x 30	158/51	Limited Lifetime	Integrated	6"	80"	12	8½"	12
F631L	Audrey™	25"	3	18°	80 x 70	1300/700	Limited Lifetime	Integrated	6"	80"	N/A	15"	20
F633L	Gordon	29"	3	18°	80 x 70	1300/700	Limited Lifetime	Integrated	6"	80"	N/A	16"	20
F636L	Switch 3-Blades	60"	3	12°	DC 172 x 12	148/49	Limited Lifetime	Integrated	10"	80"	18¼"	16¾"	18
F638L	Switch 5-Blades	60"	5	12°	DC 172 x 12	134/48	Limited Lifetime	Integrated	10"	80"	18¼"	16¾"	18
F644L	Roto Flush	52"	3	22°	153 x 17	163/92	Limited Lifetime	Integrated	N/A	18"	10¼"	8½"	16
F656L	Contractor Uni-Pack LED		5	12°	172 x 14	197/58	Limited Lifetime	Integrated	6"	80"	17"	12½"	19
F659	Classica	54"	5	14°	172 x 16	188/64	Limited Lifetime	K9659	6"	80"	16¾"	13"	23
F662	Vapor	60"	3	14°	DC 85 x 28	160/65	Limited Lifetime	N/A	6"	80"	10"	7¾"	13
F663	Avtur	60"	3	16°	DC 85 x 28	180/60	Limited Lifetime	N/A	N/A	12"	14½"	11"	12
F668L	Bridge	60"	3	15°	DC 153 x 18	150/50	Limited Lifetime	Integrated	6"	80"	13"	9 ¾"	17
F670L	Airetor III	54"	3	12°	153 x 17	150/60	Limited Lifetime	Integrated	6"	80"	13	8½"	12
F671L	Pure	48"	3	12°	153 x 17	165/60	Limited Lifetime	Integrated	N/A	12"	10"	7 3/4"	14
F673L	Airetor	52"	5	12°	153 x 17	150/60	Limited Lifetime	Integrated	6"	80"	13"	8.5"	14
F676L	Vital	44"	3	21°	153 x 15	140/60	Limited Lifetime	Integrated	6"	80"	14 3/4"	8 3/4"	12
F678L	Twist	52"	3	16°	DC 120 x 15	167/71	Limited Lifetime	Integrated	6"	80"	14 ½"	9 ¾"	20
F681L	Groton	56"	5	12°	188 x 25	135/50	Limited Lifetime	Integrated	10"	80"	20¼"	15½"	38
F684L	Clean	60"	5	12°	DC123 x 30	160/50	Limited Lifetime	Integrated	6"	80"	16"	15"	20
F688	Kola	52"	5	12°	172 x 14	190/61	Limited Lifetime	Adaptable	6"	80"	15½"	13¼"	18
F689	Kola XL	60"	5	12°	188 x 20	160/44	Limited Lifetime	Adaptable	6"	80"	15½"	13¼"	23
F690L	Espace	52"	5	14°	172 x 17	161/59	Limited Lifetime	Integrated	6"	80"	14½"	10½"	21
F692L	Veer	56"	3	12°	172x20	128/52	Limited Lifetime	Integrated	6"	80"	15½"	13"	27
F695	Kafé	52"	5	12°	172 x 14	190/61	Limited Lifetime	Adaptable	6"	80"	15"	12¾"	18
F696	Kafé XL	60"	5	12°	188 x 20	160/44	Limited Lifetime	Adaptable	6"	80"	15"	12¾"	23
F702L	Volterra™	52"	5	14°	172 x 20	159/71	Limited Lifetime	Integrated	6"	80"	18¼"	10"	28
F705L	Napoli™	56"	5	14°	188 x 25	153/59	Limited Lifetime	Integrated	12"	80"	25"	17¼"	40
F714L	Curl	60"	3	Variable	DC 168 x 15	100/60	Limited Lifetime	Integrated	6"	80"	12½"	10½"	20

Minka-Aire® ceiling fans are warranted to be free from defects in material and workmanship only if purchased from an authorized Minka-Aire® distributor:
 Fan motor - Limited Lifetime Warranty to original purchaser with proof of purchase as long as fan remains in its original installation location and is installed using only the original hardware provided (including hanger bracket). All other parts and controls - warranted to original purchaser with proof of purchase for one (1) year from date of purchase.

FAN SPECIFICATIONS

		Blade Sweep	No of Blades	Blade Pitch	Motor Size	RPM (Hi/Low)	Warranty	Light Kit	Downrod ¾" ID	Lead Wire	Dimension A	Dimension B	Hanging Weight (LBS)
F715DL	Napoli™ II	68"	5	14°	DC 120 x 25	109/44	Limited Lifetime	Integrated	12"	80"	25¾"	17¾"	46
F717L	Kelvyn™	52"	5	14°	153 x 15	150/60	Limited Lifetime	Integrated	6"	80"	15"	12"	20
F726	Spectre	60"	4	14°	DC 188 x 10	163/48	Limited Lifetime	Integrated	6"	80"	15¼"	11¾"	18
F727	Rudolph	52"	3	14°	172 x 16	139/57	Limited Lifetime	K9727L	6"	80"	15½"	13½"	20
F728	Rudolph Wet	60"	3	16°	DC 145 x 18	160/50	Limited Lifetime	N/A	6"	80"	21"	14"	12
F729	Steal	54"	3	5°	188 x 15	170/65	Limited Lifetime	Adaptable	6"	80"	13½"	11¼"	30
F734L	Strata	52"	4	12°	172 x 17	163/81	Limited Lifetime	Integrated	6"	80"	18"	14½"	21
F742L	Molino	65"	3	14°	DC 153 x 15	131/49	Limited Lifetime	Integrated	6"	80"	14 1/2"	11"	19
F745	Sabot	52"	5	12°	DC 172 x 12	173/50	Limited Lifetime	Integrated	6"	80"	12"	11"	13
F747L	Timber 68"	68"	3	23°	DC 172 x 25	105/50	Limited Lifetime	Integrated	10"	80"	15"	13½"	16
F749L	SkyHawk™	60"	3	14°	DC 153 x 20	160/35	Limited Lifetime	Integrated	6"	80"	15 3/4"	11 3/4"	16
F753	Java	54"	3	14°	153 x 18	150/71	Limited Lifetime	N/A	6"	80"	14¾"	13¾"	16
F753L	Java LED	54"	3	14°	153 x 18	150/71	Limited Lifetime	Integrated	6"	80"	15¾"	14¾"	17
F754L	Java Xtreme 84"	84"	3	16°	DC 120 x 25	90/50	Limited Lifetime	Integrated	6"	80"	15 ½"	12 ½"	35
F756L	Future	65"	8	14°	DC 120 x 25		Limited Lifetime	Integrated	6"	80"	13¾"	11"	24
F759L	Classica Gallery Edition	54"	5	14°	172 x 16	188/64	Limited Lifetime	Adaptable	6"	80"	16¼"	13¼"	27
F762L	Pierce 65"	65"	3	14°	DC 126 x 12	160/60	Limited Lifetime	Integrated	6"	8"	15"	11"	12
F763L	Pierce 84"	65"	3	14°	DC 126 x 20	155/58	Limited Lifetime	Integrated	6"	8"	15"	12"	12
F765L	Transonic	56"	5	12°	172 x 16	125/51	Limited Lifetime	Integrated	6"	80"	15"	14"	19
F767L	Skymaster	65"	5	16°	DC 120 x 25	160/35	Limited Lifetime	Integrated	6"	80"	13¾"	10¼"	19
F771L	Ellipse	60"	5	16°	DC 120 x 20	150/45	Limited Lifetime	Integrated	6"	80"	13¼"	8¾"	14
F774L	Pike	56"	3	12°	DC 145 x 18	145/49	Limited Lifetime	Integrated	6"	80"	10¾"	10¾"	14
F781L	Chubby	58"	5	18°	DC 120 x 15	150/45	Limited Lifetime	Integrated	6"	80"	14 ¼"	10"	25
F782L	Chubby II	58"	5	18°	DC 120 x 15	150/45	Limited Lifetime	Integrated	N/A	12"	12 ¾"	8 ¾"	20
F786	Simple 44"	44"	3	26°	DC 123 x 30	196/51	Limited Lifetime	K9787L	6"	74"	12¾"	11¼"	10
F787	Simple 52"	52"	3	14°	DC 123 x 30	191/148	Limited Lifetime	K9787L	6"	80"	12½"	10¾"	11
F788L	Dream Star	60"	8	Variable	DC 168 x 30	105/50	Limited Lifetime	Integrated	12"	80"	16½"	8½"	15
F789	Simple 65"	65"	3	14°	DC 123 x 30	160/58	Limited Lifetime	N/A	6"	8"	12¾"	11½"	11
F797L	Falco Flush	54"	4	12°	153 x 18	167/77	Limited Lifetime	Integrated	N/A	8"	10½"	9"	15
F802L	Vintage Gyro™	42"	6	20°	82 x 25	1350/720	Limited Lifetime	Integrated	6"	80"	16¾"	18"	34
F803DL	Artemis™	58"	3	Variable	188 x 25	133/69	Limited Lifetime	Integrated	6"	80"	15½"	12"	26
F828	Symbio	56"	5	15°	DC 125 x 30	161/48	Limited Lifetime	Integrated	6"	80"	17¾"	15¾"	16
F833	Kewl	52"	3	22°	153 x 15	201/104	Limited Lifetime	N/A	6"	80"	14"	10"	12
F839	Airewave	65"	3	16°	DC 120 x 25	150/45	Limited Lifetime	Integrated	6"	80"	21¼"	13"	15

Minka-Aire® ceiling fans are warranted to be free from defects in material and workmanship only if purchased from an authorized Minka-Aire® distributor:

Fan motor - Limited Lifetime Warranty to original purchaser with proof of purchase as long as fan remains in its original installation location and is installed using only the original hardware provided (including hanger bracket). All other parts and controls - warranted to original purchaser with proof of purchase for one (1) year from date of purchase.

FAN SPECIFICATIONS

		Blade Sweep	No of Blades	Blade Pitch	Motor Size	RPM (Hi/Low)	Warranty	Light Kit	Downrod ¾" ID	Lead Wire	Dimension A	Dimension B	Hanging Weight (LBS)
F843	Wave 52"	52"	3	48°	172 x 14	153/61	Limited Lifetime	N/A	6"	80"	12½"	8½"	12
F844	Light Wave 52"	52"	3	48°	172 x 14	139/57	Limited Lifetime	Integrated	6"	80"	13¾"	8½"	14
F845	Light Wave 44"	44"	3	Variable	153 x 17	139/57	Limited Lifetime	Integrated	6"	80"	13¾"	8½"	14
F847L	Timber 84"	84"	3	14°	DC 172 x 25		Limited Lifetime	Integrated	10"	80"	15"	13½"	22
F848	Light Wave 65"	65"	3	Variable	188 x 20	133/69	Limited Lifetime	Integrated	6"	80"	13¾"	8½"	20
F853	Aviation	60"	3	Variable	DC 120 x 25	115/89	Limited Lifetime	N/A	6"	80"	14"	12¼"	16
F853L	Aviation LED	60"	3	Variable	DC 120 x 25	115/44	Limited Lifetime	Integrated	6"	80"	13"	10½"	20
F854	Wave 44"	44"	3	Variable	153 x 17	153/61	Limited Lifetime	Integrated	6"	80"	12½"	8½"	14
F855	Wave 65"	65"	3	Variable	188 x 20	153/61	Limited Lifetime	Integrated	6"	80"	12½"	8½"	20
F862L	Pinup	60"	10	23°	DC 172 x 12	150/72	Limited Lifetime	Integrated	6"	80"	15"	14"	21
F864L	Barn	65"	10	16°	DC 168 x 30	110/30	Limited Lifetime	Integrated	10"	80"	21"	18"	33
F865L	Barn H2O	84"	10	16°	DC 168 x 30	110/30	Limited Lifetime	Integrated	10"	80"	21"	18"	45
F866L	Deco	65"	6	12°	DC 156 x 12	104/47	Limited Lifetime	Integrated	6"	78"	13¾"	11"	25
F868L	Sleek	60"	3	12°	DC 172 x 12	140/50	Limited Lifetime	Integrated	6"	80"	13"	9½"	12
F870L	Windmolen	65"	12	24°	DC 123 x 30	76/33	Limited Lifetime	Integrated	10"	80"	18½"	14"	26
F873	Simple Flush 52"	52"	3	18°	DC 123 x 15	180/50	Limited Lifetime	Adaptable	N/A	12"	9"	7¼"	9
F874	Simple Flush 60"	60"	3	18°	DC 123 x 15	160/50	Limited Lifetime	Adaptable	N/A	12"	9"	7¼"	9
F887	Xtreme 72"	72"	9	4°	DC 165 x 12	120/51	Limited Lifetime	N/A	6"	80"	13½"	12"	22
F887	Xtreme 96"	96"	9	4°	DC 165 x 12	72/51	Limited Lifetime	N/A	6"	80"	13½"	12"	25
F888	Slipstream	65"	8	14°	DC 165 x 25	98/78	Limited Lifetime	Integrated	6"	80"	17¼"	13"	25
F896	Xtreme H2O 65"	65"	8	9°	DC 123 x 30	130/50	Limited Lifetime	K9886L	6"	80"	12"	11¼"	45
F896	Xtreme H2O 84"	84"	8	9°	DC 123 x 30	90/50	Limited Lifetime	K9886L	6"	80"	13¾"	12½"	45
F897L	Cairo	65"	6	13°	DC 153 x 20	117/51	Limited Lifetime	Integrated	6"	80"	14¼"	11¼"	22
F900L	Cristafano™	68"	5	14°	212 x 25	112/49	Limited Lifetime	Integrated	16"	80"	19¾"	13"	42
F903L	Artemis™ IV	64"	4	Variable	DC 123 x 30	154/51	Limited Lifetime	Integrated	6"	80"	16"	7¾"	20
F905	Artemis™ XL5	62"	5	28°	DC 172 x 25	91/74	Limited Lifetime	Integrated	6"	80"	16¼"	12¾"	21
F933	Bowie	60"	3	Variable	DC 153 x 218	168/58	Limited Lifetime	K9933L	6"	12"	13	10	16
F796L	Falco	54"	4	12°	153 X 18	140/65	Limited Lifetime	Integrated	6"	80"	16"	13"	16
F1000	Dyno	52"	5	12°	153 x 17	175/63	Limited Lifetime	Integrated	6"	80"	14½"	11½"	15
F1001	Dyno XL	60"	5	12°	DC 172 x 12	135/55	Limited Lifetime	N/A	6"	80"	14"	11½"	22

Minka-Aire® ceiling fans are warranted to be free from defects in material and workmanship only if purchased from an authorized Minka-Aire® distributor:
 Fan motor - Limited Lifetime Warranty to original purchaser with proof of purchase as long as fan remains in its original installation location and is installed using only the original hardware provided (including hanger bracket). All other parts and controls - warranted to original purchaser with proof of purchase for one (1) year from date of purchase.

INDEX

GLASS SHADES

2548	336
2549	336
2565	336
4099	336

HANGING SYSTEMS & ACCESSORIES

A180	348, 350
A245	348
A245-BN	351
A581	348
A581-BG	267, 350
A581-ORB	350
A581-WHF	350
A662-SBR	323, 350
ACI00	334
ACI00-BCW	334
ACI00-BS	334
ACI00-BWH	334
ACI00-DBB	334
ACI00-FB	334
ACI00-FPWH	334
ACI00-KA	334
ACI00-ORB	334
ACI00-PBL	334
ACI00-PI	334
ACI00-PW	334
ACI00-STW/GOW	334
ACI00-SWH	334
DR500-Coupler	348
DR503	348
DR504	348

DR506	348
DR510	348
DR512	348
DR518	348
DR524	348
DR536	348
DR548	348
DR560	348
DR572	348
F307-COVER	243

CEILING FANS

F307-MBK	242
F402L-ORB	269
F410L-WH	180
F448L-BS	95
F448L-BS/DW	94
F448L-CL	95
F448L-ORB	95
F448L-WH	95
F465L-BNW	261
F465L-CL	261
F465L-ORB	260
F465L-WH	261
F467L-BNW	258
F467L-CL	259
F467L-ORB	259
F467L-WH	259
F468L-CL	31
F468L-LBR/WHF	30
F468L-WHF	31
F474L-ORB	256

F476L-BNW	252
F476L-ORB	253
F476L-WH	253
F477L-BNW	255
F477L-ORB	254
F477L-WH	255
F502L-BCW	210
F510L-BS	185
F510L-CL	184
F510L-ORB	185
F510L-WH	185
F513-KA	155
F513-WH	154
F517L-BN	78
F517L-WH	79
F518L-BN	81
F518L-ORB	80
F518L-WH	81
F519L-BN	82
F519L-ORB	83
F519L-WH	83
F521L-ABD	50
F521L-ORB	51
F521L-WHF	51
F522L-BN	151
F522L-CL	150
F522L-ORB	151
F522L-WH	151
F523L-ABD	240
F523L-ORB	241
F523L-WHF	241
F524-ABD	165

INDEX

F524-CL	165	F552L-BNK	226	F569L-WH	197
F524-DK	165	F552L-CL	227	F571-ORB	313
F524-ORB	165	F552L-ORB	227	F571-WH	312
F524-WHF	164	F552L-WH	227	F572-CL	311
F532-BNW	317	F553L-BN/DW	148	F572-ORB	310
F532-DRF	317	F553L-CL	149	F572-WH	311
F532-ORB	317	F553L-ORB	149	F581L-BG	266
F532-SI	316	F553L-WHF	149	F581L-ORB	267
F534L-BN	143	F556-BN	92	F581L-WHF	267
F534L-CL	143	F556-BN/DW	93	F582L-GL	279
F534L-CL/SG	142	F556-BNK	93	F582L-ORB	278
F534L-ORB	143	F556-CL	93	F589-BI/AI	315
F534L-WH	143	F556-WHF	93	F589-ORB	315
F535L-ABD	169	F556L-BN	85	F589-TCL	314
F535L-CL	168	F556L-BN/DW	86	F589-WH	315
F535L-WHF	169	F556L-BNK	87	F593L-ORB	318
F539-ORB	121	F556L-CL	84	F593L-WH	319
F543L-CL	199	F556L-HBZ	87	F594L-ORB	320
F543L-DK	198	F556L-ORB	85	F594L-WH	321
F543L-KA	199	F556L-WH	85	F602L-BN/CH	123
F543L-WHF	199	F556L-WHF	85	F602L-FB	122
F544L-BCW	72	F562-WH	190	F614-BNK	206
F546-BS	88	F563-ORB	192	F614-DBB	207
F546-WH	89	F563-WH	193	F614-FB	209
F547-BS	91	F565-BN	147	F614-HBZ	209
F547-BS/DW	90	F565-WH	146	F614-ORB	207
F547-WH	91	F566-WH	144	F614-PW	208
F551-BN	225	F568-BS/DW	194	F617L-BN	163
F551-ORB	224	F568-ORB	195	F617L-GM	163
F551-PN	225	F568-WH	195	F617L-ORB/AB	163
F551-WH	225	F569L-BS	197	F617L-WHF	162
F552L-BN	227	F569L-ORB	196	F619L-BN	189

INDEX

F619L-CL/BN	188	F656L-HBZ	99	F676L-WHF	221
F619L-WHF	189	F656L-ORB	97	F678L-CL	215
F623L-BBR/SBR	157	F656L-PN	97	F678L-DK	214
F623L-BC/SBR	157	F656L-WH	97	F678L-GRY	215
F623L-BS/BN	157	F659-DRF	74	F678L-WHF	215
F623L-WHF/BN	157	F659-FB	75	F681L-ORB	268
F623L-WHF/SBR	156	F659-PBL	75	F684L-GI/BN	77
F624-ABD	281	F662-CL	322	F684L-MBK/BN	76
F624-CL	281	F662-CL/TK	323	F684L-ORB/TB	77
F624-ORB	280	F662-WHF	323	F684L-PN	77
F624-WHF	281	F663-BS/SWG	244	F688-KA	132
F625L-CL	301	F663-SBR/WHF	245	F688-WH	133
F625L-ORB	301	F663-WHF/BW	245	F689-DBB	135
F625L-WHF	300	F668L-DB/WTO	24	F689-KA	134
F626L-CL	303	F668L-LBR/CL	25	F689-WH	135
F626L-GRY	302	F668L-LBR/WHF	25	F690L-BN/SL	116
F626L-ORB	303	F670L-BN/SL	47	F690L-CL	117
F626L-WHF	303	F670L-CL	47	F690L-ORB/MM	117
F631L-CL/DK	60	F670L-ORB	47	F690L-WH	117
F633L-CL	120	F670L-WHF	46	F692L-BN/SL	217
F636L-BN/SL	38	F671L-BN/SL	160	F692L-CL	216
F636L-CL	39	F671L-CL	161	F692L-WHF	217
F636L-WHF	39	F671L-WHF	161	F695-BNK	124
F638L-BN/SL	41	F673L-BN/SL	45	F695-CL	125
F638L-CL	40	F673L-CL	44	F695-HBZ	125
F638L-WHF	41	F673L-ORB	45	F695-KA	125
F644L-BN	167	F673L-WHF	45	F695-WH	125
F644L-CL	166	F675L-CL	284	F696-BNK	126
F644L-WHF	167	F675L-ORB	285	F696-CL	127
F656L-BN/DW	98	F676L-BRS/SL	221	F696-HBZ	127
F656L-BNK	99	F676L-CL	220	F696-KA	127
F656L-CL	96	F676L-ORB	221	F696-WH	127

INDEX

F702L-BCW	222	F747L-BN/CL	203	F765L-BN/SL	213
F702L-VB	223	F747L-HBZ/AW	202	F765L-CL	212
F705L-STW	152	F747L-HBZ/MP	203	F765L-WHF	213
F714L-BN/CL	102	F749L-BN	177	F767L-CL	178
F714L-BN/SL	103	F749L-BNK	176	F767L-SBR/WHF	179
F714L-WHF	103	F749L-CL	177	F767L-WHF	179
F715DL-STW	153	F749L-WHF	177	F771L-BN/SL	114
F717L-BN/SL	128	F753-BNW	271	F771L-BN/WH	115
F717L-CL	129	F753-CL	271	F774L-BN/SL	37
F717L-WHF	129	F753-KA	270	F774L-CL	37
F727-BN/MM	171	F753-PN	271	F774L-LBR/CL	36
F727-BN/SL	173	F753-WHF	271	F774L-WHF	37
F727-CL	170	F753L-BNW	273	F781L-BNW	248
F727-DK	173	F753L-CL	272	F781L-CL	249
F727-ORB	172	F753L-KA	273	F781L-WHF	249
F727-WHF	171	F753L-PN	273	F782L-BNW	251
F728-CL	283	F753L-WHF	273	F782L-CL	250
F728-ORB	282	F754L-BNW	275	F782L-WHF	251
F728-WHF	283	F754L-KA	274	F786-BNW	288
F729-CL	186	F754L-WHF	275	F786-CL	287
F729-GM	187	F756L-BNW	264	F786-ORB	286
F729-WHF	187	F756L-CL	265	F786-SBR/CL	287
F734L-GL	309	F756L-WHF	265	F786-SL	289
F734L-ORB	308	F759L-PBL	73	F786-WHF	289
F734L-SI	309	F762L-BN/DK	32	F787-BNW	292
F742L-BNK	277	F762L-CL/SSB	33	F787-CL	290
F742L-CL/SG	277	F762L-DB/WTO	33	F787-ORB	291
F742L-SBR	276	F762L-LBR/CL	33	F787-SBR/CL	291
F745-BN	175	F763L-BN/DK	34	F787-SL	293
F745-CL	175	F763L-CL/SSB	35	F787-WHF	293
F745-DK	175	F763L-DB/WTO	35	F788L-ORB	104
F745-ORB	174	F763L-LBR/CL	35	F789-BNW	294

INDEX

F789-CL	295	F843-CL	231	F854-DK	229
F789-ORB	295	F843-DK	231	F854-WH	228
F789-SL	295	F843-DRF	230	F855-CL	233
F789-WHF	295	F843-SL	231	F855-DK	233
F796L-BN/SL	119	F843-WH	231	F855-SL	232
F796L-CL	119	F844-CL	139	F855-WH	233
F796L-CL/SBR	118	F844-DK	139	F862L-CL	158
F796L-WHF	119	F844-DRF	138	F862L-WHF	159
F797L-BN/SL	28	F844-SL	139	F864L-BNK	69
F797L-CL	29	F844-WH	139	F864L-CL/SG	69
F797L-CL/SBR	29	F845-CL	137	F864L-HBZ	69
F797L-WHF	29	F845-DK	136	F864L-WHF/SVG	68
F802L-KA	218	F845-DRF	137	F865L-BNK	247
F802L-ORB	219	F845-SL	137	F865L-CL/SG	246
F803DL-CL	54	F845-WH	137	F865L-HBZ	247
F803DL-DK	52	F847L-HBZ/AW	204	F866L-BNW	263
F803DL-LN	55	F847L-HBZ/MP	205	F866L-CL	262
F803DL-MP	53	F848-CL	141	F866L-WHF	263
F803DL-SL	55	F848-DK	140	F868L-BN	183
F803DL-TL	53	F848-DRF	141	F868L-CL/CL	183
F803DL-WH	53	F848-SL	141	F868L-ORB	183
F828-BN	201	F848-WH	141	F868L-SBR/WHF	182
F828-BN/DW	200	F853-BN/AMP	64	F868L-WHF	183
F828-BN/WH	201	F853-BN/CL	63	F870L-BS	325
F828-ORB	201	F853-BN/DK	62	F870L-ORB	324
F828-WHF	201	F853-BN/MM	63	F870L-TCL	325
F833-BK	131	F853-BN/SL	65	F870L-TW	325
F833-SL	131	F853L-BN/AMP	66	F873-CL	296
F833-WH	130	F853L-BN/DK	67	F873-GRY	297
F839L-DM	49	F853-SBR/CL	63	F873-WHF	297
F839L-MBM	48	F853-WH	65	F874-CL	299
F839L-SM	49	F854-CL	229	F874-GRY	298

INDEX

F874-WHF	299	F903L-ORB	57	K9525L-I	334
F887-72-BN	235	F903L-SBR/MBK	57	K9614L-BNK	337
F887-72-ORB	234	F903L-SBR/WHF	56	K9614L-DBB	337
F887-96-BN	236	F905L-DK	59	K9659L-DRF	337
F887-96-ORB	237	F905L-LN	58	K9727L-BN	173, 336
F888L-BNW	306	F905L-WH	59	K9727L-CL	336
F888L-CL	305	F933-CL	71	K9727L-DK	336
F888L-CL/DK	304	F933-WHF	70	K9727L-ORB	336
F888L-DK	305	F1000-BN	109	K9727L-WHF	336
F888L-ORB	307	F1000-BNK	109	K9787L-BNW	335
F888L-WHF	307	F1000-BN/SL	107	K9787L-CL	295, 335
F896-52-BNW	326	F1000-CL	106	K9787L-ORB	335
F896-52-CL	327	F1000-HBZ	108	K9787L-SBR	335
F896-52-ORB	327	F1000-ORB	107	K9787L-SL	335
F896-52-SI	327	F1000-WH	107	K9787L-WHF	293, 335
F896-52-WHF	327	F1001-BN	111	K9873L-CL	299, 335
F896-65-BNW	328	F1001-BNK	112	K9873L-GRY	335
F896-65-CL	329	F1001-CL	110	K9873L-WHF	335
F896-65-ORB	329	F1001-HBZ	113	K9886L-BNW	335
F896-65-SI	329	F1001-ORB	111	K9886L-CL	329, 335
F896-65-WHF	329	F1001-WH	111	K9886L-ORB	335
F896-84-BNW	330			K9886L-SI	335
F896-84-CL	331	LIGHT KITS		K9886L-WHF	335
F896-84-ORB	331	K34L-44	337	K9933L	71, 336
F896-84-SI	331	K35L-BNK	337		
F896-84-WHF	331	K35L-PW	337	CONTROL SYSTEMS	
F897L-BNW/CL	26	K9115L	334	RC400	338
F897L-CL	27	K9401L-ORB	334	RC500	338
F897L-WHF	27	K9401L-WH	334	RC600	338
F900L-BCW	100	K9402L-44	334	RC1000	339
F903L-BN/SL	57	K9402L-ORB	334	RCS212	339
F903L-GM/MBK	57	K9515L-I	334	RCS213 & RCS213-S	339

INDEX




RCS223	339	WC116L	341	WDC1200	341
RCS223L	339	WC400	340	WDC1300	341
WC105-WH	341	WC500	340		
WC106L	341	WC600	340		
WC106-WH	341	WC1000	340		
WC110L	341	WCS212	339		
WC115	341	WCS213 & WCS213-S	340		
WC116	341	WCS223	340		

FINISH CODES

Minka-Aire® Finishes

AB..... Antique Brass	DRB..... Dark Restoration Bronze™	PI..... Patina Iron
ABD/ABDD Brushed Aluminum	DRFF..... Driftwood	PN..... Polished Nickel
BC..... Brushed Carbon	FB..... French Beige	PW..... Pewter
BCW..... Belcaro Walnut™	GI..... Grey Iron	RD..... Red
BG..... Bahama Beige™	GL..... Galvanized	RB Restoration Bronze™
BI/AI..... Black Iron with Aged Iron Accents	GM..... Gun Metal	SBR..... Soft Brass
BK..... Black	GRY..... Grey	SI..... Smoked Iron
BN..... Brushed Nickel	HBZ..... Heirloom Bronze	SL..... Silver
BNK..... Burnished Nickel	HT..... Heritage™	SM..... Sterling Maple
BNW..... Brushed Nickel Wet	KA..... Kocoa	STW/GOW.. Sterling Walnut™/Golden Walnut
BRS..... Brilliant Silver	LBR..... Legacy Brass	SWH..... Shell White
BS..... Brushed Steel	LN..... Liquid Nickel	TB..... Toned Brass
BWH..... Bone White	MBK..... Matte Black	TCL..... Textured Coal Black
CL..... Coal Black	MBM..... Matte Black Maple	TL..... Translucent
CSBR..... Champagne Soft Brass	MP..... Maple Finish	TWW..... Textured White
DB..... Dark Bronze	MW..... Mossoro Walnut™	VB..... Volterra Bronze™
DBB..... Dark Brushed Bronze	ODK..... Distress Koa (Outdoor)	VI..... Vintage Iron
DK..... Distressed Koa	ORB..... Oil Rubbed Bronze	WH/044.... White
DM..... Dark Maple	PBL..... Provencal Blanc	WHF..... Flat White

Dimensions A and B were measured with the shortest downrod enclosed with the fan.

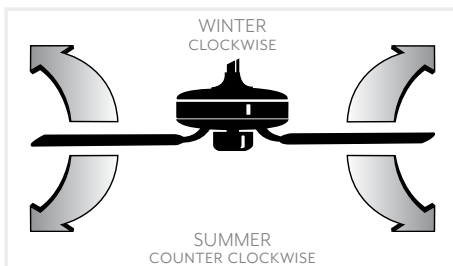

Minka-Aire® ceiling fans are suitable for year-round use and can contribute to your comfort in the summer and winter. With our reverse switch, in the winter you will be able to move the heat from your ceiling and circulate the air in your living area. In the summer you will save energy by recirculating air from the outside into your room and also if your air conditioning is used, save on energy costs.





World Headquarters

1151 Bradford Circle
Corona, California 92882

Showroom

Dallas Market Center
2100 Stemmons, Suite 4103
Dallas, Texas 75207

Toll 800.221.7977 • 951.735.9220 • **Fax** 951.735.9758

sales@minkagroup.net

minka.com